


Specification for monolithic crystal filter:


MQF 10.7-0750/03

1. General

1.1. Package:

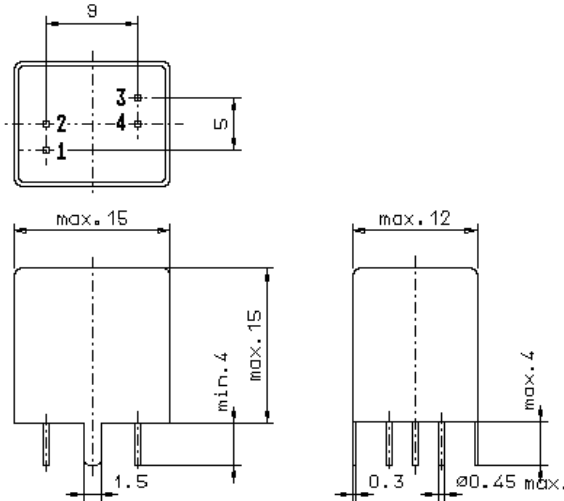

GV4

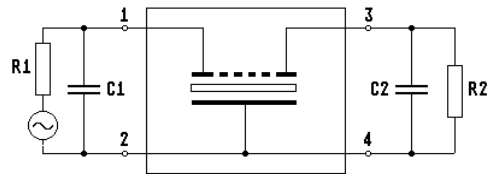

- | | |
|-----------------------------------|------------------|
| 1.2. Type name: | MQF 10.7-0750/03 |
| 1.3. Number of poles: | 6 |
| 1.4. Operable temperature range: | -30°C to +80°C |
| 1.5. Operating temperature range: | -25°C to +70°C |
| 1.6. Storage temperature range: | -55°C to +80°C |

2. Electric values

- | | |
|---------------------------------------|----------|
| 2.1. Nominal centre frequency f_0 : | 10.7 MHz |
|---------------------------------------|----------|

2.2. Pass band

- | | |
|---|-------------------------|
| 2.2.1. Bandwidth between 3 dB - frequencies: | $\geq f_0 \pm 3.75$ kHz |
| 2.2.2. Ripple (at $f_0 \pm 3.0$ kHz): | ≤ 2.0 dB |
| 2.2.3. Insertion loss:
(measured on smallest attenuation in pass band) | ≤ 3.0 dB |

2.3. Stop band

- | | |
|--|--------------|
| 2.3.1. $f_0 \pm 8.75$ kHz | ≥ 45 dB |
| 2.3.2. $f_0 \pm 12.5$ kHz | ≥ 65 dB |
| 2.3.3. $f_0 \pm 12.5$ kHz..... ± 300 kHz | ≥ 65 dB |

- | | |
|--|-------------------------|
| 2.4. Terminating impedance (input and output): | $1800 \Omega // 3.5$ pF |
|--|-------------------------|

- | | |
|-------------|---|
| 3. Marking: | manufacturer, date code
10.7-0750/03 |
|-------------|---|

- | | |
|----------------------------|---|
| 4. Environment conditions: | Corresponding to Vectron standard CF001 |
|----------------------------|---|

Edited by: _____ date: _____ name: _____