

1

2

3

4



5

6

7



A

A

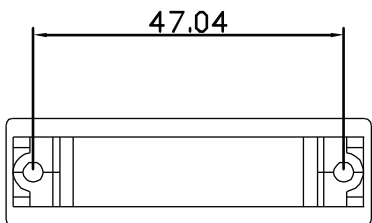


B

B

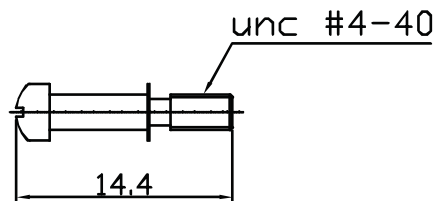


C

C

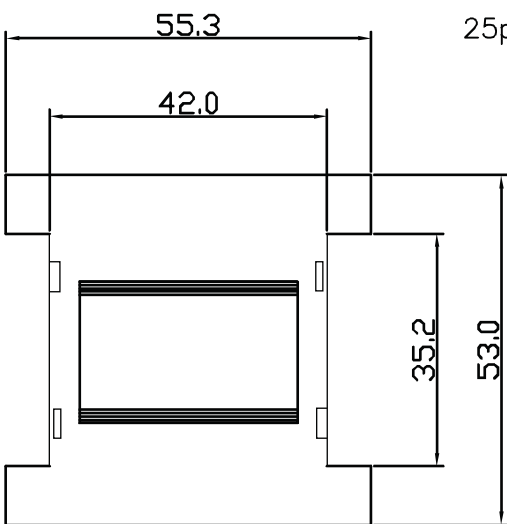

25pin to 25pin type



Material:

- Hood: ABS thermoplastic UL94V-0
- Screwlock: Brass, 100µ" min. Nickel plated
- Shell type: Nickel plate metalized

Note: Male to Male type not need add nut.

D

D

E

E

F

F

G

G

Unit: mm



Scale	Free						Date	Name	Title RS232 Empty Housing for Self Assembly, 25-pin, metal
TOLERANCE						Drawn	07.03.06		
X.	±0.3					Approved			ASSMANN WSW-No.
X.X	±X								AB939-R
X.XX	±X								Drawing-No.
DIM	TOL								rev00
X.°	±X°								
X.X°	±X°								Sheet
Angle	TOL	Id.	Modification	Date	Name	1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us			1/1

1

2

3

4

5

6

7

H

H