




FCS-3056 2MP 2MP: 1

Fixed Dome Network Camera, 3-Megapixel, PoE 802.3af, Day & Night, IR LEDs



- 1. Lens
- 2. Ethernet Port
- 3. Memory Card Slot

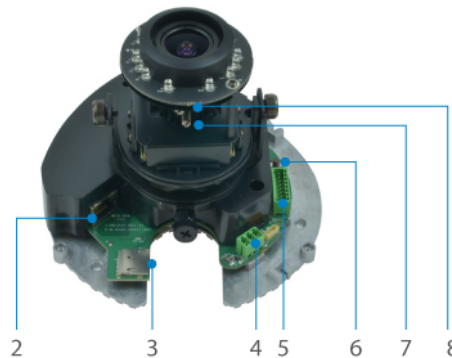

- 4. Power Input
- 5. Digital Input/Output and Audio-In / Audio-out

- 6. Reset Button
- 7. Focal Length Adjustment
- 8. Monitor Distance Adjustment

Key Features

- 2MP 2MP Micro SDHC/SDXC 2MP
- 3-2MP
- Vandal-proof IK09-rated housing
- 30 m 30 m LED
- 2MP 2MP IR-2
- 2MP: H.264/MJPEG
- Power support: PoE (IEEE 802.3af)
- 64-2MP 2MP (OneSecure App 2MP)



System Specifications

Standards & Protocols:

IEEE 802.3 10-BASE-T, Ethernet

IEEE 802.3u 100-BASE-TX, Fast Ethernet

IEEE 802.3af Power over Ethernet (PoE)

IEEE 802.1X Network Access Control

TCP, UDP, HTTP, HTTPS, DHCP, PPPoE, RTP, RTSP, IPv6, DNS, DDNS, NTP, ICMP, ARP, IGMP, SMTP, FTP, UPnP, SNMP, Bonjour

Image Sensor:

3-Megapixel 1/3.2" Progressive Scan CMOS

Connectors and Cabling:

1 x RJ-45 10/100 Mbps PoE port

1 x 3.5mm line out

1 x 3.5mm line in

I/O terminal block (1 DI/1 DO)

Modularity:

1 x MicroSDHC/ MicroSDXC card slot

Button:

Reset Button

Indicator:

Power

Lens:

Vari-focal, Fixed iris, Manual focus, f2.8-12mm, F1.4

IR Cut Filter:

Removable infrared-cut filter for day & night function

IR LED:

15 IR LEDs for illumination up to 30m

Shutter Time:

1/5 ~ 1/10,000 sec

Angle of View:

70.5°-28.2°

Pan/Tilt/Zoom:

Digital Zoom to very high detail available on Software

Video Compression:

H.264 / MJPEG

Resolution:

3M(2048 x 1536)

Video Format:

RAW

Audio Compression:

G.711

Power:

Power Consumption: PoE Class 2 (IEEE802.3af) / 6.49 W (IR on)

Power Input: 802.3af PoE

Features

General:

Backup: MicroSDHC /MicroSDXC card slot for local storage

Video:

Image Setting: - Adjustable image size, quality and bit rate

- Configurable brightness, sharpness, contrast, saturation, white balance and exposure

- AGC/AWB/AES

- Back Light Compensation (BLC)

- 2D Noise Reduction (2DNR)

Streaming: Up to 2 video streams

Audio:

Streaming: 2-way audio

Input/Output: line input, line output

Performance**Data Transfer Rate:**

10/100Mbps

Storage Capacity:

SD/MicroSD memory card of up to 64GB

Frame Rate:

15 fps at 2048 x 1536; 30 fps at 1920 x 1080; 30 fps at 1280 x 720; 30 fps at 640 x 480; 15 fps at 320 x 240

Minimum illumination:

Color: 0.1 lux at F1.4

B/W: 0 lux (IR LED on)

Environment**Temperature (°C):**

Operating: -10°C ~ 50°C

Humidity (Non-condensing):

Operating: 10% ~ 85%

Physical Specifications**Dimensions (W x D x H mm):**

146 x 114 x 146

Weight (g):

538 g

Enclosure:

Vandal Resistant IK09-rated

Others**Approval and Compliance:**


CE, FCC, ONVIF, IK09

Deployment:

Wall/Ceiling Mount

Operation Systems:

Microsoft Windows 8/7/Vista/XP

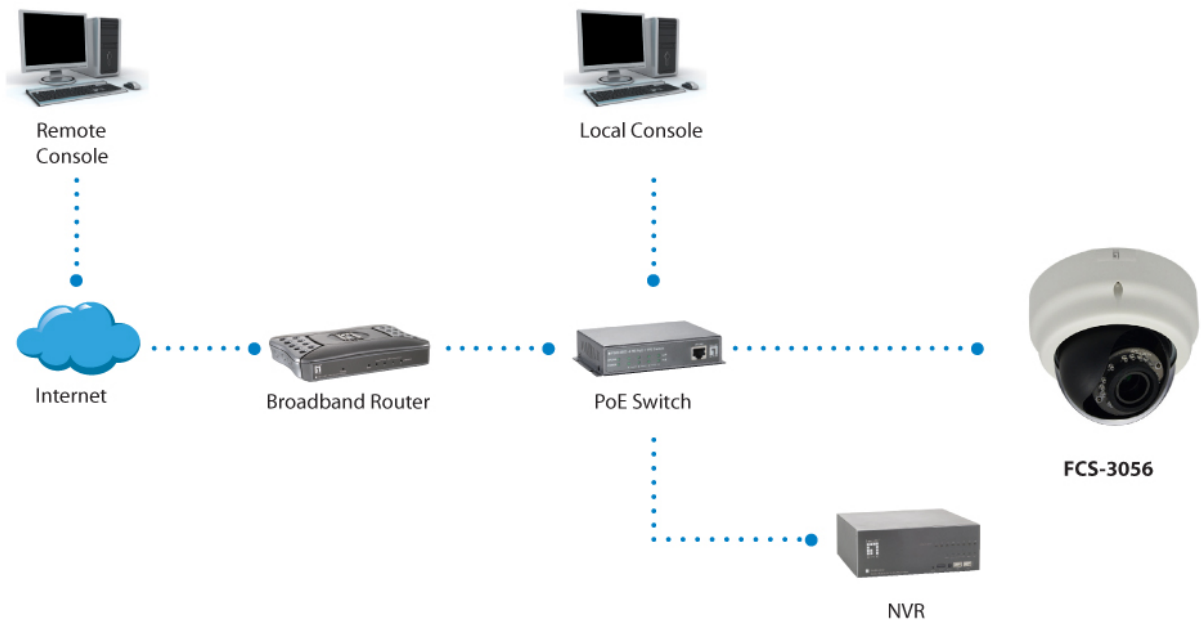

Order Information

FCS-3056

Package Contents

FCS-3056
Mounting Kit
Screw Kit
Quick Installation Guide
Resource CD (User Manual, Utility, QIG)

No liability or responsibility for any errors or omissions in the content.
Specifications are subject to change without notice.
All mentioned brand names are registered trademarks and property of their owners.
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.