

ROITHNER LASERTECHNIK GIRDH

WIEDNER HAUPTSTRASSE 76 IO40 VIENNA AUSTRIA TEL. +43 I 586 52 43 -0, FAX. -44, OFFICE@ROITHNER-LASER.COM



LM-104-E002



TECHNICAL DATA

IR Diode Laser Module

LM-104-E002 is a multi purpose, low cost, small size infrared diode laser module, featuring a brass housing with embedded focusable lens, and driver electronics.

Features

- Small size (Ø 9.8 x 26.0 mm)
- Focusable
- Low current consumption



Specifications (Tc=25°C, Po<3mW, Vcc=3V)

| | Min. | Тур. | Max. | Unit |
|--|--------------------------------|------|------|------|
| Optical | | | | |
| CW Output Power Po | 1.5 | - | 3.0 | mW |
| Center Wavelength λ _C | 870 | 880 | 890 | nm |
| Output Aparture | 3.5 x 1.7 (±0.5 mm) | | | mm |
| Beam Size at 6M | 10 15 | | | mm |
| Electrical | | | | |
| Current draw | - | 25 | 35 | mA |
| Supply voltage | 3 | - | 5 | V |
| General | | | | |
| Body | Brass | | | |
| Dimensions | 9.8 x 26 | | | mm |
| Lens | Acryl | | | |
| Life time | | | | h |
| Wire | 26 AWG PVC-Free | | | |
| Solder | Nihon Genma Solder (Lead-Free) | | | |
| | NP303YS RMA 0.8mm | | | |
| | NP601SZ 555 GK | | | |
| Operating temperature | 0 +40 | | | °C |
| Operating humidity (relative humidity) | 40 95 | | | % |
| Storage temperature | -25 +70 | | | °C |
| Storage humidity (relative humidity) | 20 80 | | | % |

The above specifications are for reference purpose only and subjected to change without prior notice




ROITHNER LASERTECHNIK GIRDH

WIEDNER HAUPTSTRASSE 76

1040 VIENNA AUSTRIA TEL. +43 I 586 52 43 -0, FAX. -44, OFFICE@ROITHNER-LASER.COM



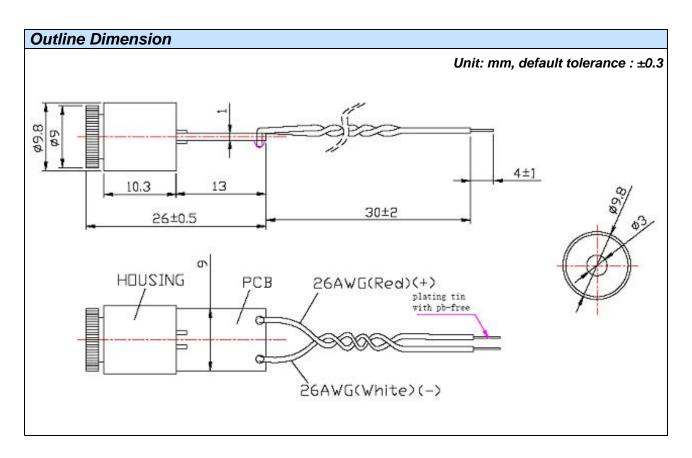

Cautions

- 1. Do not operate the device above the maximum rating condition, even momentarily. It may cause unexpected permanent damage to the device.
- 2. Semiconductor laser device is very sensitive to electrostatic discharge. High voltage spike current may change the characteristics of the device, or malfunction at any time during its sercice periode. Therefor, proper measures for precenting electrostatic discharge are strongly recommended.
- 3. Do not look into the laser beam directly with the naked eyes. The laser beam may cause severe damage to human eyes.
- 4. The laser module is emitting invisible light.

