



CHENMKO ENTERPRISE CO.,LTD

BAT54BDWPT

Lead free devices




SURFACE MOUNT
SCHOTTKY DIODE ARRAY
VOLTAGE 30 Volts CURRENT 0.2 Ampere

APPLICATION
 * Ultra high speed switching

FEATURE
 * Small surface mounting type. (SC-88/SOT-363)
 * High speed. ($T_{RR}=2.5nSec$ Typ.)
 * Suitable for high packing density.
 * Maximum total power dissipation is 200mW.
 * Peak forward current is 300mA.
 * Schottky diode array (Dual common anode).

CONSTRUCTION
 * Silicon epitaxial planar

MARKING
 * BD1

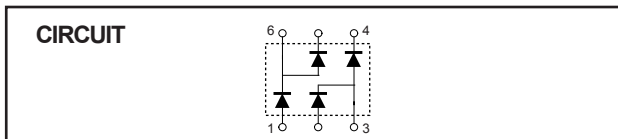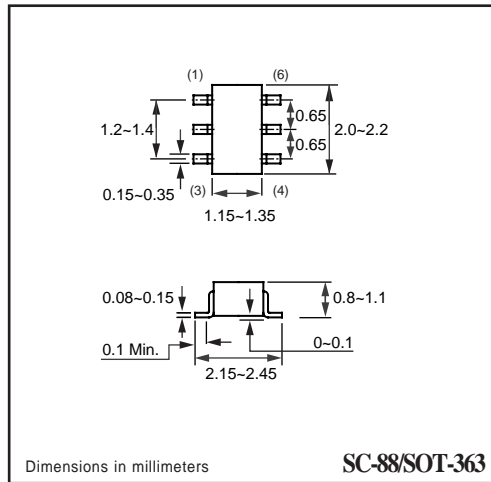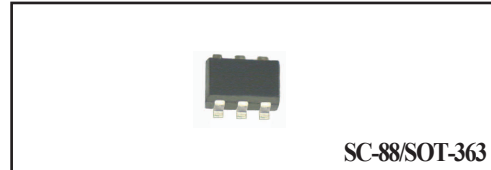

MAXIMUM RATINGS (At $T_A = 25^{\circ}C$ unless otherwise noted)

RATINGS	SYMBOL	BAT54BDWPT	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	30	Volts
Maximum RMS Voltage	V_{RMS}	21	Volts
Maximum DC Blocking Voltage	V_{DC}	30	Volts
Maximum Average Forward Rectified Current	I_o	0.2	Amps
Peak Forward Surge Current at 1Sec.	I_{FSM}	0.6	Amps
Typical Junction Capacitance between Terminal (Note 1)	C_J	10	pF
Maximum Reverse Recovery Time (Note 2)	T_{RR}	5.0	nSec
Maximum Operating Temperature Range	T_J	+125	$^{\circ}C$
Storage Temperature Range	T_{STG}	-65 to +125	$^{\circ}C$

ELECTRICAL CHARACTERISTICS (At $T_A = 25^{\circ}C$ unless otherwise noted)

CHARACTERISTICS	SYMBOL	BAT54BDWPT	UNITS
Maximum Instantaneous Forward Voltage	@ $I_f = 0.1mA$	VF1	240
	@ $I_f = 1.0mA$	VF2	320
	@ $I_f = 10mA$	VF3	400
	@ $I_f = 30mA$	VF4	500
	@ $I_f = 100mA$	VF5	1000
Maximum Average Reverse Current at $V_R = 25V$	I_R	2.0	μA

NOTES : 1. Measured at 1.0 MHz and applied reverse voltage of 1.0 volts.
 2. Measured at applied forward current of 10mA and reverse current of 10mA.
 3. ESD sensitive product handling required.

RATING CHARACTERISTIC CURVES (BAT54BDWPT)

FIG. 1 - FORWARD CHARACTERISTICS

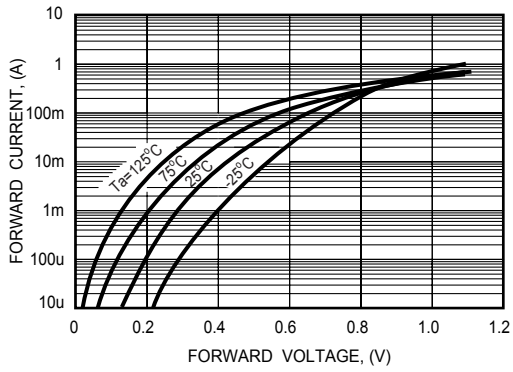


FIG. 2 - REVERSE CHARACTERISTICS

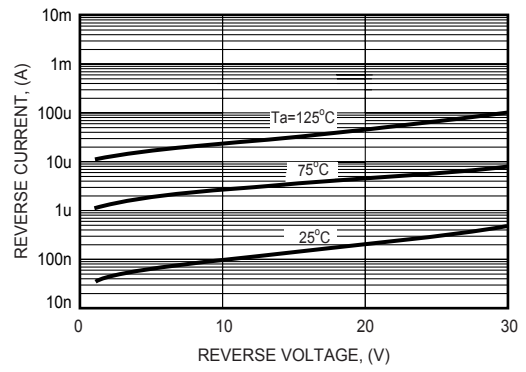


FIG. 3 - TYPICAL JUNCTION CAPACITANCE

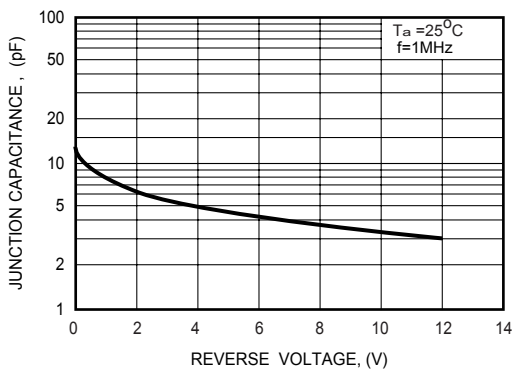


FIG. 4 - TYPICAL FORWARD CURRENT DERATING CURVE

