


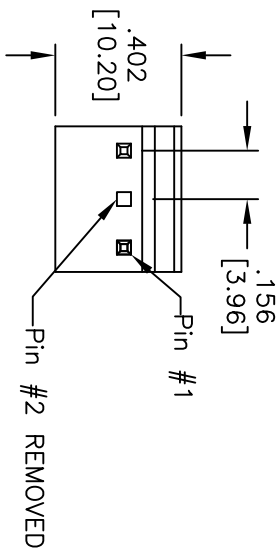


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	01/23/07	
A		REDRAWN	12/1/09	

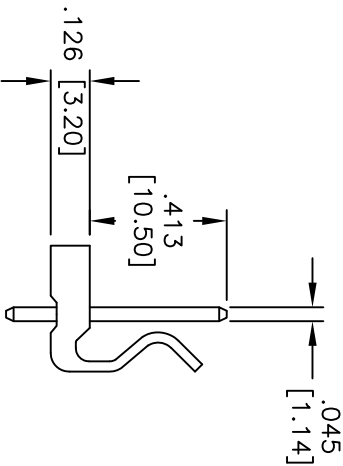

RECOMMENDED PCB LAYOUT

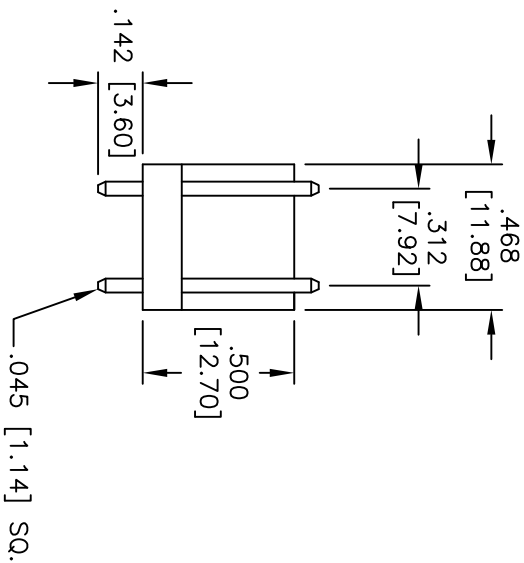

**SPECIFICATIONS:**

- Material: Insulator: Nylon 66, rated UL 94V-2
- Insulator color: Natural
- Contacts: Brass
- Plating: Gold flash over Copper underplate overall
- Electrical: Operating voltage: 250 V AC, DC
- Current rating: 5 A AC, DC
- Insulation resistance: 1000Mohms min.
- Dielectric withstanding voltage: 1500 VAC for 1 minute
- Temperature Rating: Operating temperature: -25°C to +85°C

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .156 [3.96] LOCKING HEADER, PCB, STRAIGHT  
 REMOVE PIN #2

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN: BW	01/23/07
CHECKED:	
APPROVED:	

SIZE: X	PART NO.: LHB-03-SA1-X02	REV: A
REF: S0006T	SCALE: NTS	SHEET 1 OF 1