

# VOLTAGE CONTROLLED OSCILLATOR

## SURFACE MOUNT MODEL: DCRO119185-12-1

OPTIMIZED BANDWIDTH


1190 - 1850 MHz

### FEATURES:

- ▶ Exceptional Phase Noise Performance
- ▶ Small Size, Surface Mount
- ▶ Lead Free Patented REL-PRO® Technology
- ▶ Planar Resonator Construction




### Phase Noise

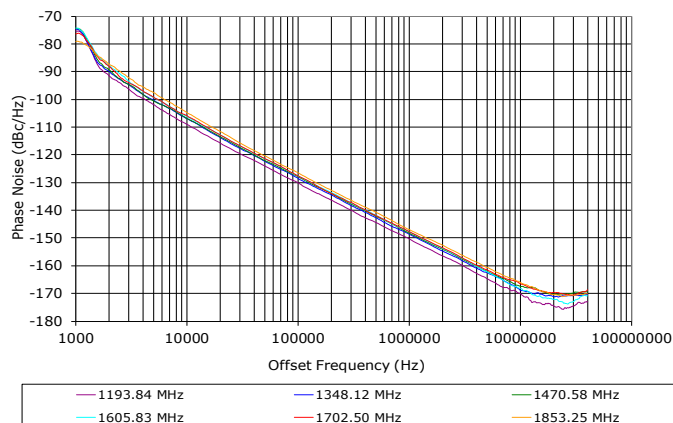

### SPECIFICATIONS

|                             |                            |
|-----------------------------|----------------------------|
| Frequency                   | 1190 - 1850 MHz            |
| Tuning Voltage              | See table below.           |
| Bias Voltage                | +12 VDC @ 30 mA (Max.)     |
| Output Power                | +3 dBm (Min.)              |
| Tuning Sensitivity          | 9 - 42 MHz/V (Typ.)        |
| Output Impedance            | 50 Ohms (Nom.)             |
| Harmonic Suppression        | 15 dB (Typ.)               |
| Frequency Pulling           | 5 MHz (Typ. @ 1.75:1 VSWR) |
| Frequency Pushing           | 5 MHz/V (Typ.)             |
| Tuning Port Capacitance     | 70 pF (Typ.)               |
| Phase Noise @ 10 kHz        | -108 dBc/Hz (Typ.)         |
| Operating Temperature Range | -40 to +85 °C              |

Package # 278LF

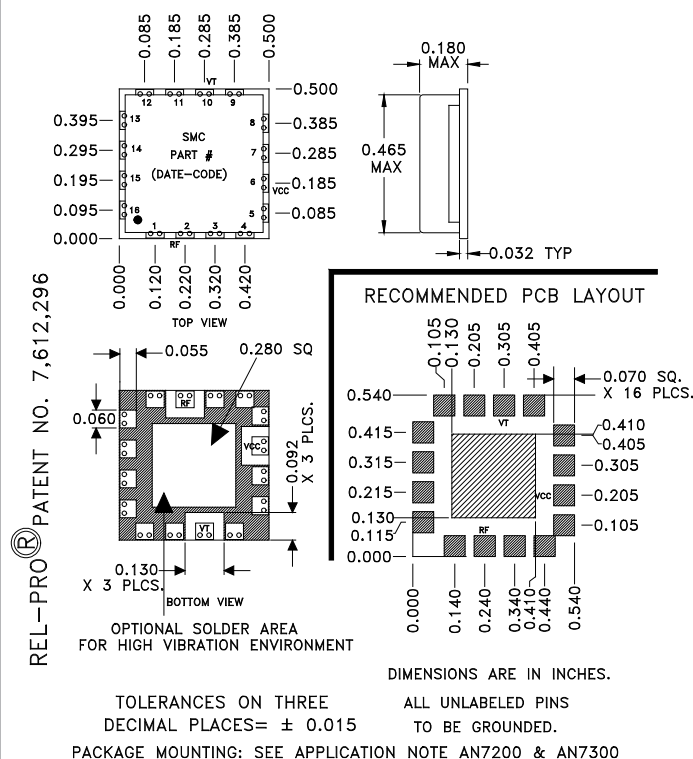

### Guaranteed Tuning Specifications

| Tuning Voltage ( V ) | Frequency ( MHz ) |
|----------------------|-------------------|
| 0.5                  | 1190 (Max)        |
| 5                    | 1275 (Min)        |
| 8                    | 1378 (Min)        |
| 15                   | 1600 (Min)        |
| 20                   | 1720 (Min)        |
| 28                   | 1850 (Min)        |

### Absolute Maximum Ratings

|                              |                |
|------------------------------|----------------|
| Storage Temp. Range          | -55 to +125 °C |
| Bias Voltage                 | +12.5 V        |
| Tuning Voltage               | +30 V          |
| DC Voltage Applied to RF Out | ± 25 V         |

Copyright © Synergy Microwave Corporation  
 201 McLean Boulevard • Paterson, New Jersey 07504 USA  
 Tel: (973) 881-8800 • Fax: (973) 881-8361  
 E-Mail: sales@synergymwave.com • Website: <http://www.synergymwave.com>  
 Patents : <http://www.synergymwave.com/patents>





# VOLTAGE CONTROLLED OSCILLATOR

## SURFACE MOUNT MODEL: DCRO119185-12-1

OPTIMIZED BANDWIDTH

1190 - 1850 MHz

PERFORMANCE PLOTS

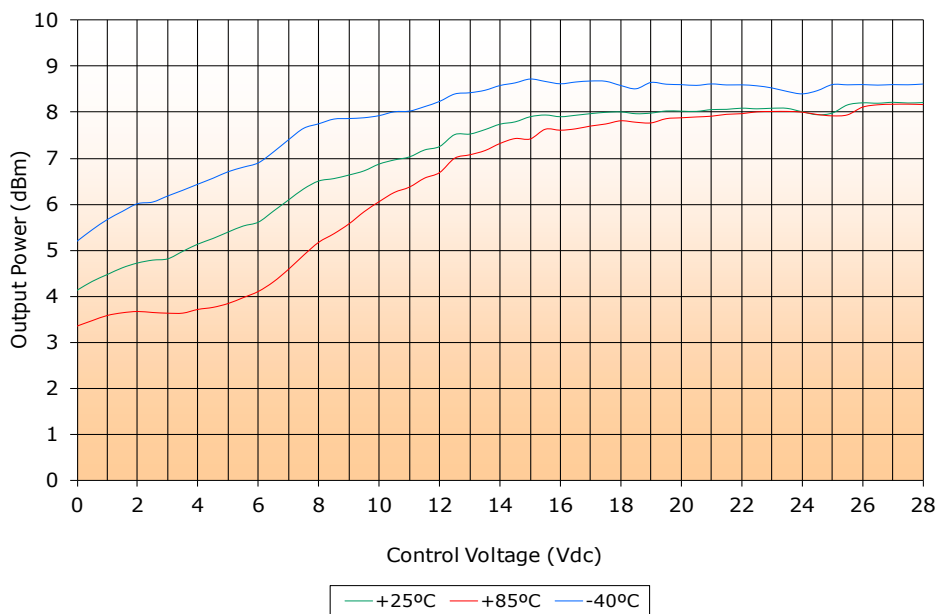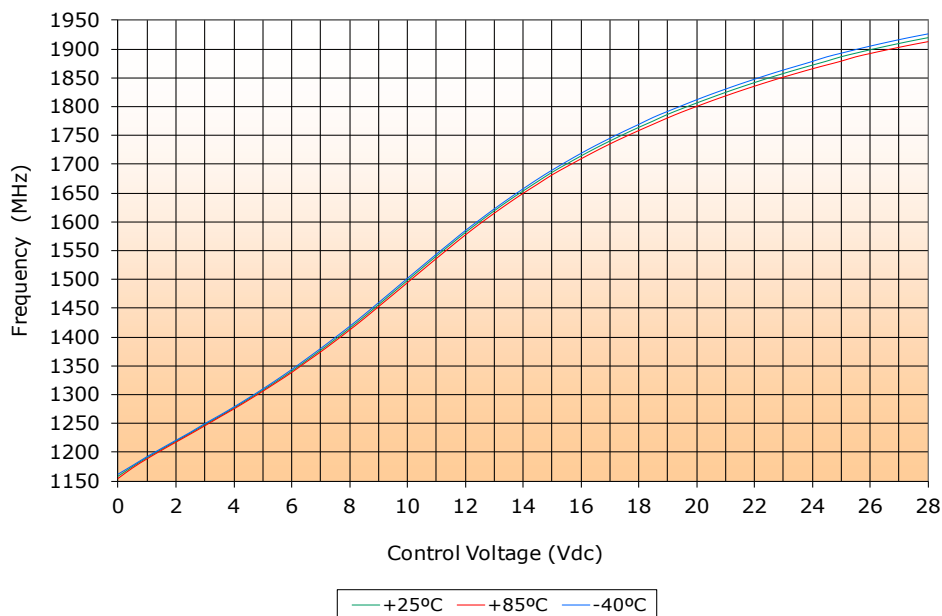

# VOLTAGE CONTROLLED OSCILLATOR

## SURFACE MOUNT MODEL: DCRO119185-12-1

OPTIMIZED BANDWIDTH

1190 - 1850 MHz

PERFORMANCE PLOTS

