

Rev	AWO #	Description	Date	Appr
-		RELEASED	01/13/09	BAS

6

5

4



3

2



1

APPROVED: _____

DATE: _____ TITLE: _____

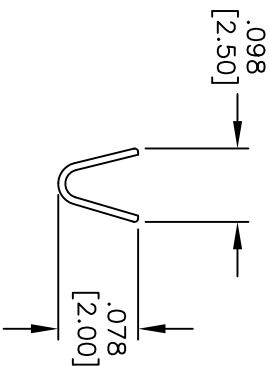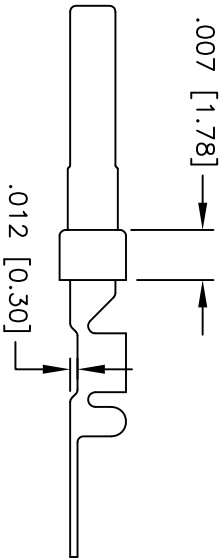

SEC A-A

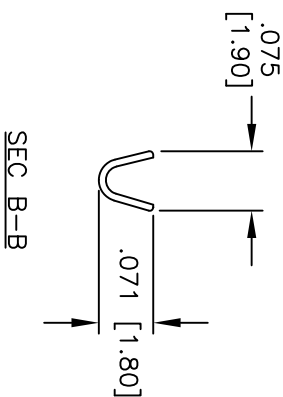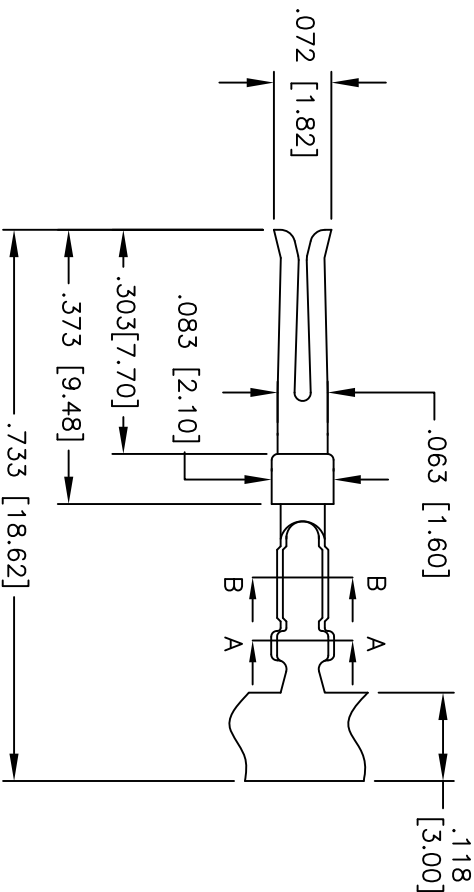

SEC B-B

SPECIFICATIONS:

Material: Phosphor Bronze

Plating: 30u" Gold over Nickel underplate overall

Electrical: Operating voltage: 250 VAC max
Current rating: 5 Amps max
Contact resistance: 20 mohms max initial

Mechanical: Recommended wire range: 20-24 AWG
Temperature Rating: Operating temperature: -65°C to +125°C

Packaging: R = 10,000 Pieces on reel
B = 1,000 Pieces loose cut

Environmental: Lead free, RoHS compliant



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

D-SUB SOCKET CONTACT, 20 - 24 AWG
30u" GOLD PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]				TOLERANCES: EXCEPT AS NOTED			
INCHES				HOLD			
.X	± .10	ØX	± .10	.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010	APPROVALS			
DRAWN				DATE			
CHECKED				DATE			
APPROVED				DATE			
TITLE				SIZE			
D-SUB SOCKET CONTACT, 20 - 24 AWG				PART NO.			
30u" GOLD PLATED				DCS-02-X-30			
REF:				SCALE: NTS			
SHEET 1 OF 1				REV.			