
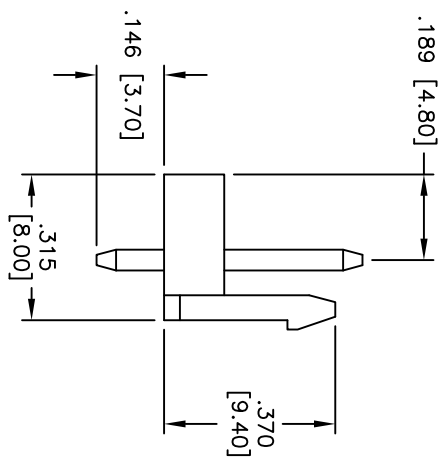
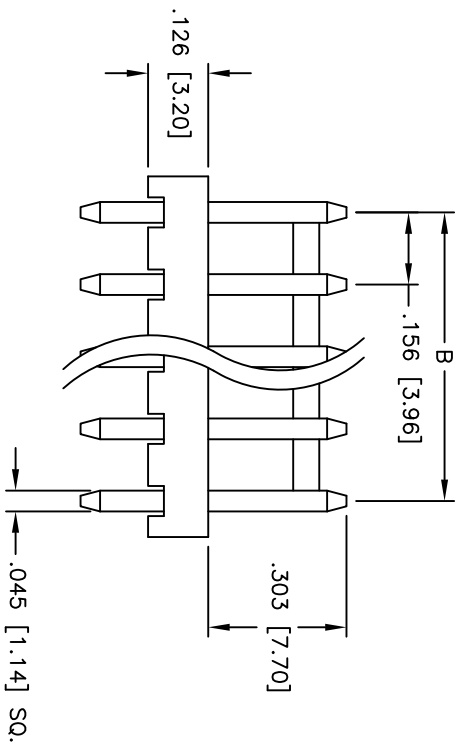
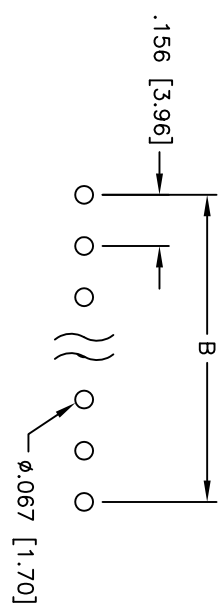


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/14/09	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

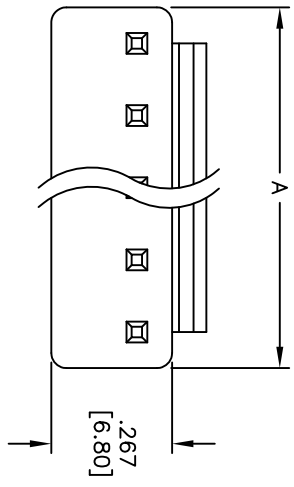

**SPECIFICATIONS:**

- Material: Nylon 66, rated UL 94V-2
- Insulator color: White
- Contacts: Brass
- Plating: Tin over Copper underplate overall
- Electrical:
  - Operating voltage: 250 VAC max
  - Current rating: 7 Amps max
  - Contact resistance: 20 mohms max
  - Insulation resistance: 1,000 Mohms min
  - Dielectric withstanding voltage: 1,500 VAC for 1 minute
- Temperature Rating:
  - Operating temperature: -25°C to +85°C
- Environmental:
  - Lead free, RoHS compliant
  - Recommended soldering temp: 235°C for 5 seconds

Positions: 2 thru 12  
 A = .156 [3.96] x No. of Positions  
 B = .156 [3.96] x No. of Spaces

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .156 [3.96] POWER HEADER  
 STRAIGHT, WITH REAR LOCK

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		TITLE: .156 [3.96] POWER HEADER STRAIGHT, WITH REAR LOCK	
INCHES		Holes	
.X ± .10	ØX ± .10	DATE	
.XX ± .020	ØXXX ± .015	DRAWN SS 1/4/09	
.XXX ± .015	ØXXXX ± .010	CHECKED	
APPROVALS	DATE	APPROVED	
DRAWN	SS	SIZE X	
CHECKED		PART NO. LHC-XX+TS	
APPROVED		SCALE: NTS	
		SHEET 1 OF 1	

