





ohne / without

Mutter / nut
max. Einschraubtiefe 7,5 mm
thread depth max. 7.5 mm

Bolzen / bolt
max. Einschraubtiefe 5,5 mm
thread depth max. 5.5 mm



M 1:1




Anschlussbereich verzinkt
terminal area tin plating

Koplanarität der Anschlüsse ≤ 0,1 mm
coplanarity area of termination ≤ 0.1 mm

Anforderungsstufe: 2
class: 2

194345	194340	X			
194346	194341			#4-40	
194347	194342			M3	
194348	194343		#4-40		
194349	194344		M3		
Ident-Nr. part-no. tape & reel	Ident-Nr. part-no. tray	ohne without	Mutter thread	Bolzen bolt	Bemerkung remark

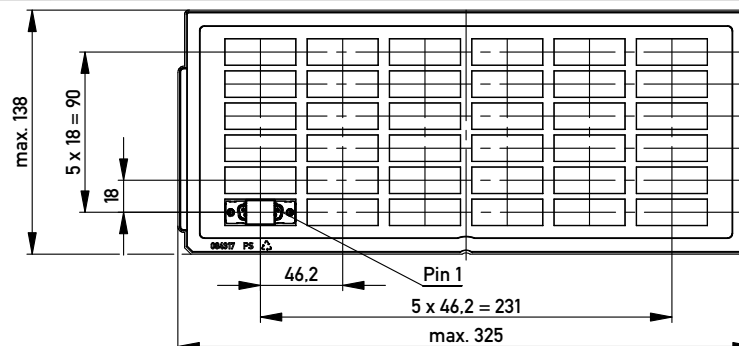


Verpackt in Tray
Verpackungseinheit 36 St.
tray packaging
packaging unit 36 pcs

Sonstige Angaben siehe Zeichnung 204628 / Additional indications according to drawing 204628


Verpackt in Gurtverpackung - Tape on Reel Packaging
Verpackungseinheit: 75 Stück - Packaging unit: 75 pcs

Abspulrichtung - Reel off Direction

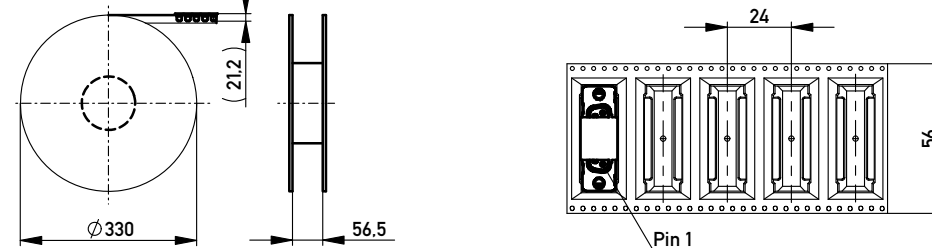

Sonstige Angaben siehe Zeichnung 204654 / Additional indications according to drawing 204654

Layoutvorschlag:
recommended layout:

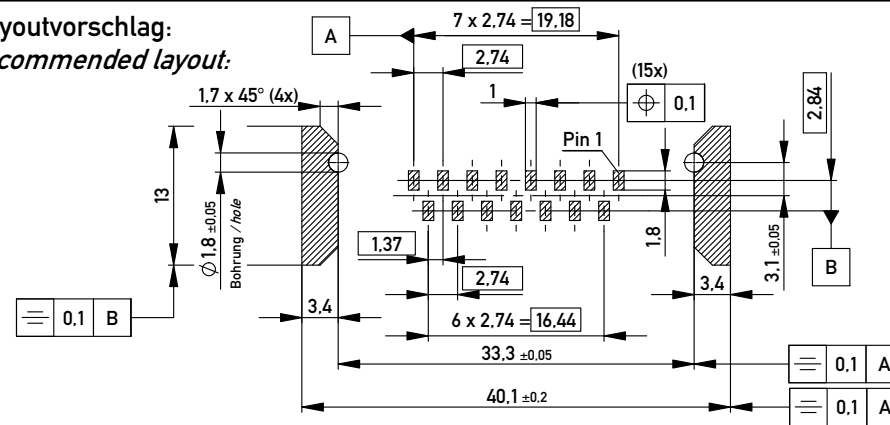

Fehlende Masse und Angaben siehe DIN 41652 / Missing information and dimensions according to DIN 41652

Sonstige Angaben siehe Fertigungsunterlagen / Additional indications according to the production documentation

Information: All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Tolerances	 All Dimensions in mm	Scale	2:1
	Subject to modification without prior notice. Drawing will not be updated.		Designation	TMC-S 15-SMD-9,0-BA8 <i>TMC-S 15-SMD-9,0-type 8</i>
 www.ERNI.com	144912			I
e Index	26.09.2011 Date	Class	TMCS	A3

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.