

OCO-M50BS

Ultra Low Noise OCXO
Sine wave

QuartzCom
the communications company





Features

- Applications: Base station, LTE, 3G & 4G
- High frequency stability vs. temperature (up to $\pm 2 \times 10^{-10}$)
- Wide operating temperature range: -40 up to +85 °C

Parameter	Specification	
	OCO-M50BS5-XX	OCO-M50BS12-XX
Frequency range	8.192 ~ 32.7680 MHz	
Standard frequencies	8.192, 10.0, 12.80, 13.00, 15.36, 16.384, 20.00, 26.00, 32.768 MHz	
Frequency stability vs. operating temperature range	$\leq \pm 2.0 \times 10^{-10}$	over -40 ~ +85 °C
	$\leq \pm 5.0 \times 10^{-10}$	over -40 ~ +85 °C
	$\leq \pm 1.0 \times 10^{-9}$	over -40 ~ +85 °C
vs. supply voltage change ($\pm 5\%$)	$\leq \pm 5 \times 10^{-10}$	optional $\leq \pm 2 \times 10^{-10}$
vs. load change ($\pm 5\%$)	$\leq \pm 5 \times 10^{-10}$	optional $\leq \pm 2 \times 10^{-10}$
vs. aging after 30 days of operation	$\leq \pm 2 \times 10^{-8}$	1 st year
Short term stability	$< 6 \times 10^{-13}$	Allan deviation per 1 s
Output waveform	sine wave	
Output level	> 300 mV (rms)	9 dBm ± 0.5 dBm
Output load	50 Ω	$\pm 5\%$
Supply voltage	+5.0 V $\pm 5\%$	+12 V $\pm 5\%$
Steady-state current consumption @ +25 °C	< 500 mA	< 250 mA
Warm-up time	< 3 min	$< \pm 2 \times 10^{-8}$ @ +25 °C
Frequency pulling range (V _{in})	$> \pm 4 \times 10^{-7}$	positive slope
V _{control} (V _c) via external voltage	0 ~ +4.5 V	0 ~ +5.0 V
Reference voltage output (V _{ref})	+4.5 V	+5.0 V
Phase noise @ 10 MHz carrier frequency	< -108 dBc/Hz	@ 1 Hz
	< -137 dBc/Hz	@ 10 Hz
	< -157 dBc/Hz	@ 100 Hz
	< -161 dBc/Hz	@ 1 kHz
	< -162 dBc/Hz	@ 10 kHz
Harmonics	> 30 dBc	optional > 50 dBc
Operating temperature range	-10 ~ +60 °C, -20 ~ +70 °C, -40 ~ +70 °C or -40 ~ +85 °C	
Storage temperature range	-55 ~ +85 °C	
Case height (H)	10 ~ 16.0 mm	

Environmental test

vibration	acceleration: 5 g; 10 Hz up to 200 Hz and down to 10 Hz; all 3 axes
shock	75 g, half-sine, 3 ms




Pin function

1 #	V _c	Supply voltage
2 #	V _{ref}	Reference output
3 #	RF	Output signal
4 #	GND	Case Ground
5 #	V _{dc}	+5 V supply

Case height H = 10 ~ 16 mm

Connection Circuit

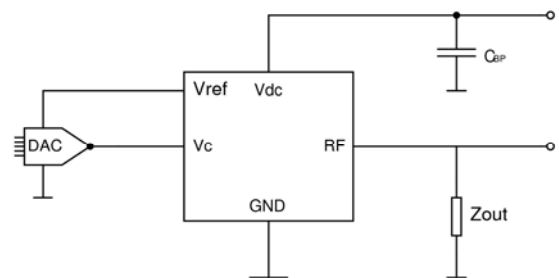

Z_{out} = 50 Ω

2002/95/EC RoHS compliant

QuartzCom AG
sales@quartzcom.com

www.quartzcom.com

QuartzCom Asia
sales-asia@quartzcom.com

QuartzCom USA
sales-usa@quartzcom.com

ISO 9001
BUREAU VERITAS
Certification



19 Aug. 11