



1. Mechanical Dimensions:

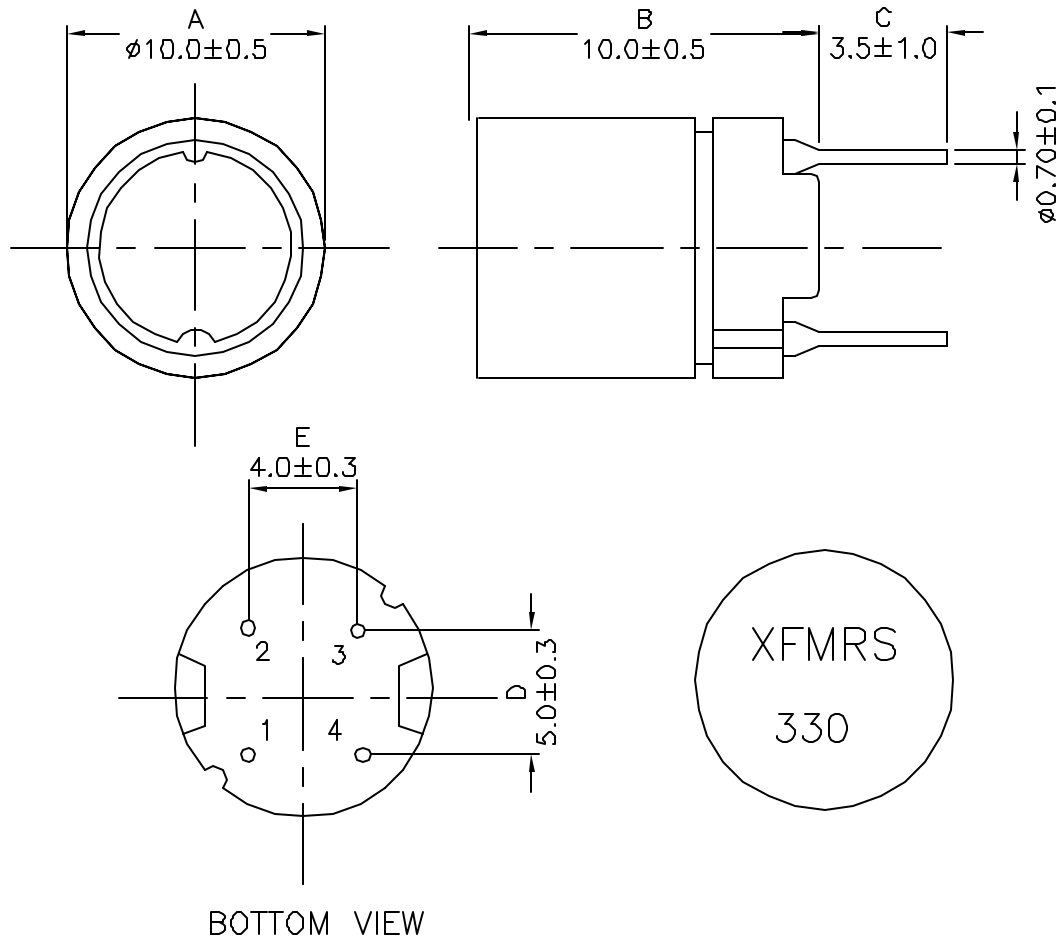

2. Schematic:



3. Electrical Specifications:

INDUCTANCE: $33.0\mu\text{H} \pm 20\%$ @2.52MHz, 0.1V
 DC RESISTANCE: 0.057 Ohms Max
 Isat: 2.1Adc (Based on 10% decrease in OCL)
 Irms: 2.1Adc (Based on 40°C Temp Rise)
 SRF: 10MHz Typ

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C, UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

Doc. Rev. A/5

PROPRIETARY Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.

XFMRS Inc. www.XFMRS.com	Title: POWER INDUCTOR		
	UNLESS OTHERWISE SPECIFIED	P/N: XFMCR110D-330L	REV. A
TOLERANCES: .xx±0.25	DWN.	李小锋	Aug-07-08
Dimensions in MM	CHK.	廖玉坤	Aug-07-08
SHEET 1 OF 1	APP.	BW	Aug-07-08