
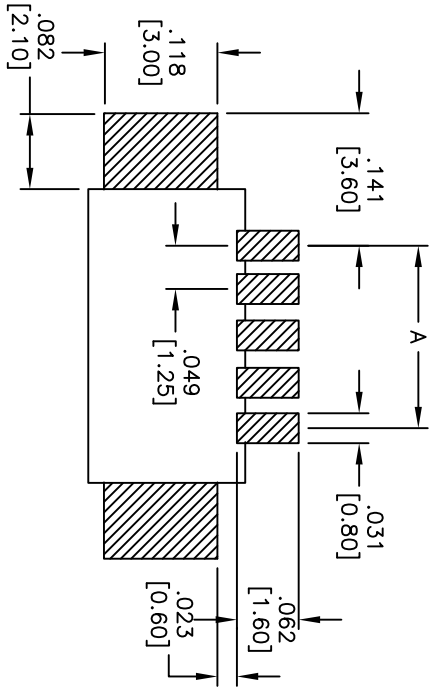
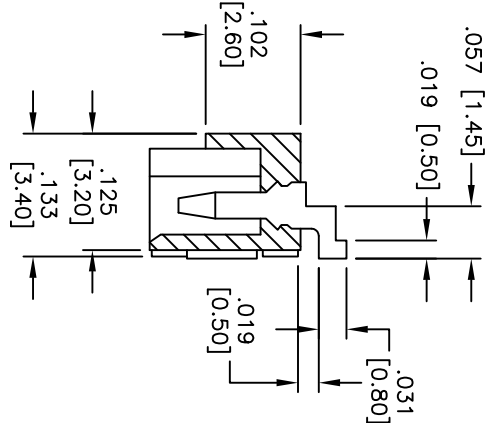
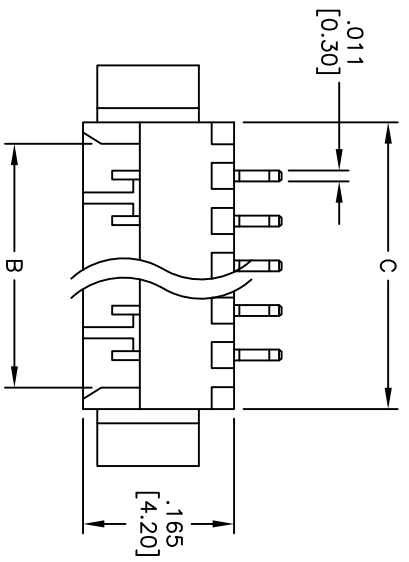


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/19/07	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

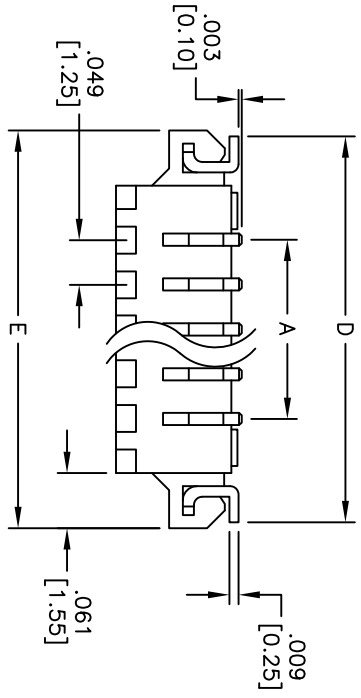

PACKAGED ON TAPE & REEL

- A=.049 [1.25] X NO. OF SPACES
- B=.049 [1.25] X NO. OF SPACES X+.070 [1.80]
- C=.049 [1.25] X NO. OF SPACES X+.118 [3.00]
- D=.049 [1.25] X NO. OF SPACES X+.236 [6.00]
- E=.049 [1.25] X NO. OF SPACES X+.251 [6.40]

**SPECIFICATIONS:**

Material: Nylon 46, rated UL 94V-0  
 Insulator color: Ivory  
 Contacts: Brass  
 Plating: Tin over Nickel underplate overall

**Electrical:**

Operating voltage: 250 VAC max  
 Current rating: 1 Amps max  
 Contact resistance: 20 mohms max  
 Insulation resistance: 100 Mohms min  
 Dielectric withstanding voltage: 250 VAC for 1 minute  
 Temperature Rating: Operating temperature: -40°C to +85°C

Environmental: Lead free, RoHS compliant.  
 Recommended soldering temp: 260°C. for 5 sec.



UNLESS OTHERWISE SPECIFIED	
ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	
DRAWN	BW
CHECKED	
APPROVED	

**ADAM TECH**  
 909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

SIZE	PART NO.	REV.
X	12SSH-B-XX-TR-SMT-T/R	
SCALE: NTS	SHEET 1 OF 1	