

Shoulder 好达

SHOULDER ELECTRONICS LIMITED

CERAMIC FILTER Data Sheet

PRODUCT 产品: CERAMIC FILTER

MODEL NO 型号: LTU(W)C 455

PREPARED 编制: Fengyu

CHECKED 审核: York


APPROVED 批准: Lijiating

DATE 日期: 2008-01-25

1. LTUC 455 SERIES

| Part Number | Center Frequency | Insertion Loss min | Ripple max | 6dB Bandwidth min | 40dB Bandwidth max | Stop Band Att. fo ± 10 KHz min | I/O Impedance |
|-------------|------------------|--------------------|-------------------|-------------------|--------------------|--------------------------------|---------------|
| | (KHz) | (dB) | (dB) | (KHz) | (KHz) | (dB) | (Ohm) |
| LTUC455D | 455 ± 1.5 | 4 | 2.0(fn ± 7.0 KHz) | ± 10.0 | ± 20.0 | 27 | 1500 |
| LTUC455E | 455 ± 1.5 | 6 | 2.0(fn ± 5.5 KHz) | ± 7.5 | ± 15.5 | 27 | 1500 |
| LTUC455F | 455 ± 1.5 | 6 | 2.0(fn ± 4.5 KHz) | ± 6.0 | ± 12.5 | 27 | 1500 |
| LTUC455G | 455 ± 1.5 | 6 | 2.0(fn ± 3.5 KHz) | ± 4.5 | ± 10.0 | 25 | 1500 |

DIMENSION:

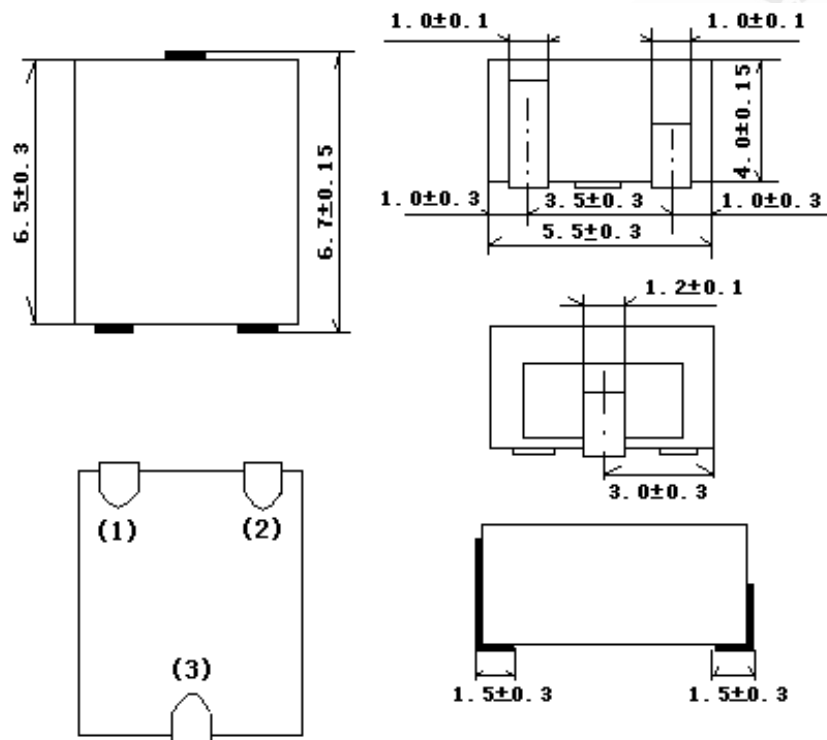





Connection
 (1): Input
 (2): Output
 (3): Ground

(in mm)

2. LTWC 455 SERIES

| Part Number | Center Frequency | Insertion Loss min | Ripple max | 6dB Bandwidth min | 40dB Bandwidth max | Stop Band Att. fo ± 10 KHz min | I/O Impedance |
|-------------|------------------|--------------------|-------------------|-------------------|--------------------|--------------------------------|---------------|
| | (KHz) | (dB) | (dB) | (KHz) | (KHz) | (dB) | (Ohm) |
| LTWC455D | 455 ± 1.5 | 4 | 2.0(fn ± 7.0 KHz) | ± 10.0 | ± 20.0 | 50 | 1500 |
| LTWC455E | 455 ± 1.5 | 4 | 2.0(fn ± 5.5 KHz) | ± 7.5 | ± 15.5 | 50 | 1500 |
| LTWC455F | 455 ± 1.5 | 6 | 2.0(fn ± 4.5 KHz) | ± 6.0 | ± 12.5 | 47 | 1500 |
| LTWC455G | 455 ± 1.5 | 6 | 2.0(fn ± 3.5 KHz) | ± 4.5 | ± 10.0 | 47 | 1500 |

DIMENSION:

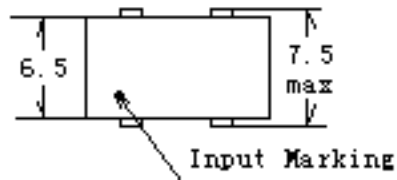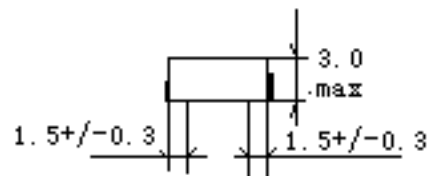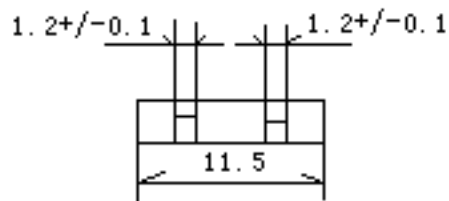

1: INPUT
2: OUTPUT
3 4: GROUND

3. PART NUMBERING : LTUC455D

4. ELECTRONICAL SPECIFICATIONS

- A. CENTRE FREQUENCY (f_0) : 455KHz \pm 1.5KHz. MAX.
- B. BAND WIDTH AT 6 dB : \pm 10.0 KHz MIN.(TO 455KHz)
- C. BAND WIDTH AT 40 dB : \pm 20.0 KHz MAX.(TO 455KHz)
- D. STOP BAND ATTENUATION : 27 dB MIN.(AT $f_0 \pm 100$ KHz)
- E. RIPPLE : 2.0 dB MAX.
- F. INSERTION LOSS : 6.0 dB MAX (AT THE SMALLEST LOSS)
- G. TEMPERATURE COEFFICIENT OF CENTER FREQUENCY : ± 50 PPM/ $^{\circ}$ C Max.(-20 TO +80 $^{\circ}$ C)
- H. INPUT/OUTPUT IMPEDANCE : 1.5K Ω

NOTE : A) CENTER FREQUENCY SHALL BE DEFINED AS THE CENTRAL VALUE OF THE BAND WITH AT 6 dB


- B) TEMPERATURE COEFFICIENT OF CENTER FREQUENCY SHALL BE DEFINED AS THE AVERAGE OF THE CENTRAL FREQUENCY.

5. MEASUREMENT

A. ENVIRONMENTAL CONDITION

MEASUREMENT SHALL BE CARRIED OUT AT THE REFERENCE TEMPERATURE OF 25 $^{\circ}$ C \pm 2 $^{\circ}$ C. IT SHALL BE POSSIBLY DONE AT 5 $^{\circ}$ C TO 35 $^{\circ}$ C UNLESS IT IS QUESTIONABLE.

B. MEASURING CIRCUIT

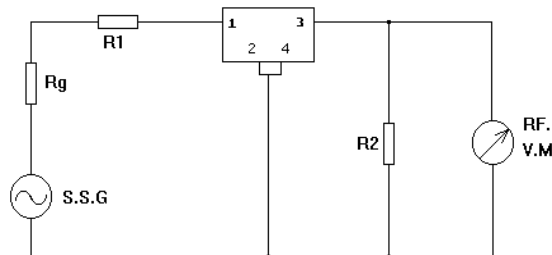

$$R_g + R_1 = R_2 = \text{Input/Output Impedance}$$

#S.S.G. (STANDARD SIGNAL GENERATION)

R.F.V.M. (RADIO FREQUENCY VOLTAGE METER)

$$R_g + R_1 = R_2 = 1.5 \text{ K } \Omega$$

$$C \leq 50 \text{ PF}$$

6. ENVIRONMENTAL CHARACTERISTICS

6-1 HIGH TEMPERATURE EXPOSURE

SUBJECT THE FILTER TO +80 $^{\circ}$ C FOR 96 HOURS. THEN RELEASE THE

FILTER TO THE ROOM CONDITIONS FOR 1 TO 2 HOURS

PRIOR TO THE MEASUREMENT. IT SHALL FULFILL THE SPECIFICATIONS IN TABLE 1.

6-2 MOISTURE

KEEP THE FILTER AT 40°C AND 95% RH FOR 96 HOURS. THEN RELEASE THE FILTER INTO THE ROOM CONDITIONS FOR 1 TO 2 HOURS PRIOR TO THE MEASUREMENT. IT SHALL FULFILL THE SPECIFICATIONS IN TABLE 1.

6-3 LOW TEMPERATURE EXPOSURE

SUBJECT THE FILTER TO -20°C FOR 96 HOURS. THEN RELEASE THE FILTER INTO THE ROOM CONDITIONS FOR 1 TO 2 HOURS PRIOR TO THE MEASUREMENT. IT SHALL FULFILL THE SPECIFICATIONS IN TABLE 1.

6-4 TEMPERATURE CYCLING

SUBJECT THE FILTER TO A LOW TEMPERATURE OF -55°C FOR 30 MINUTES. FOLLOWING BY A HIGH TEMPERATURE OF +85°C FOR 30 MINUTES. THEN RELEASE THE FILTER INTO THE ROOM CONDITIONS FOR 1 TO 2 HOURS PRIOR TO THE MEASUREMENT. IT SHALL MEET THE SPECIFICATIONS IN TABLE 1.

6-5 RESISTANCE TO SOLDER HEAT

DIP THE FILTER TERMINALS NO CLOSER THAN 1.5mm INTO THE SOLDER BATH AT 270°C \pm 10°C FOR 10 \pm 1 SEC. THEN RELEASE THE FILTER INTO THE ROOM CONDITIONS FOR 1 TO 2 HOURS. THE FILTER SHALL MEET THE SPECIFICATIONS IN TABLE 1.

6-6 MECHANICAL SHOCK

DROP THE FILTER RANDOMLY ONTO THE CONCRETE FLOOR FROM THE HEIGHT OF 30cm 3 TIMES. THE FILTER SHALL FULFILL THE SPECIFICATIONS IN TABLE 1.

6-7 VIBRATION

SUBJECT THE FILTER TO THE VIBRATION FOR 1 HOUR EACH IN X, Y AND Z AXES WITH THE AMPLITUDE OF 1.5 mm AT 10 TO 55 Hz. THE FILTER SHALL FULFILL THE SPECIFICATIONS IN TABLE 1.

6-8 LEAD FATIGUE

6-8-1 PULLING TEST

WEIGHT ALONG WITH THE DIRECTION OF LEAD WITHOUT AN SHOCK 3 KG. THE FILTER SHALL SATISFY ALL THE INITIAL CHARACTERISTICS.

6-8-2 BENDING TEST

LEAD SHALL BE SUBJECT TO WITHSTAND AGAINST 90°C BENDING IN THE DIRECTION OF THICKNESS. THIS OPERATION SHALL BE DONE TOWARD BOTH DIRECTION. THE FILTER SHALL SHOW NO EVIDENCE OF DAMAGE AND SHALL SATISFY

ALL THE INITIAL ELECTRICAL CHARACTERISTICS.


TABLE 1

| ITEM | SPECIFICATION |
|---------------------------|-----------------|
| CENTRE FREQUENCY(f_0) | 455±1.5 KHz Max |
| BAND WIDTH(6 dB) | ±10.0 KHz Min |
| SELECTIVITY(40dB) | ±20.0 KHz Max |
| STOP BAND ATTENUATION | 27 dB Min |
| RIPPLE | 2.0 dB Max |
| INSERTION LOSS | 6.0 dB Max |

7. STANDARD REFLOW SOLDERING CONDITIONS

7-1. REFLOW


FILTER IS SOLDERED TWICE WITHIN THE FOLLOWING TEMPERATURE CONDITIONS.

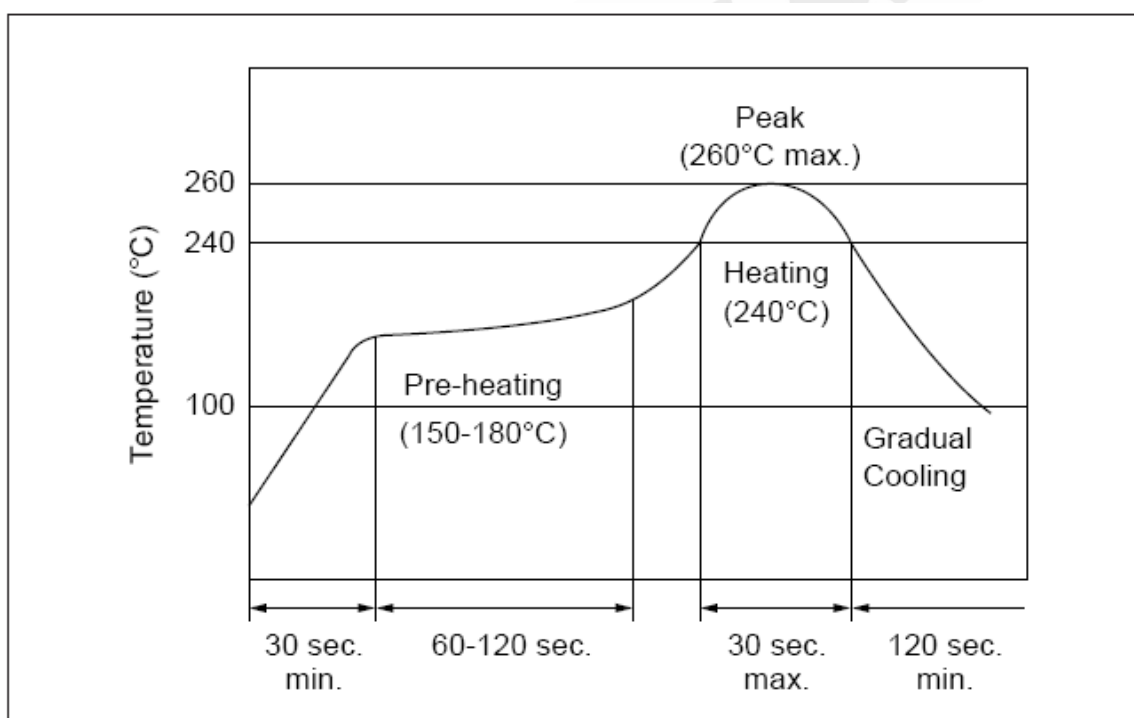

7-2. SOLDERING IRON

ELECTRODE IS DIRECTLY SOLDERED WITH THE TIP OF SOLDERING IRON AT $+350 \pm 5$ °C FOR 3.0 ± 0.5 SECONDS.

8. DIMENSIONS OF CARRIER TAPE

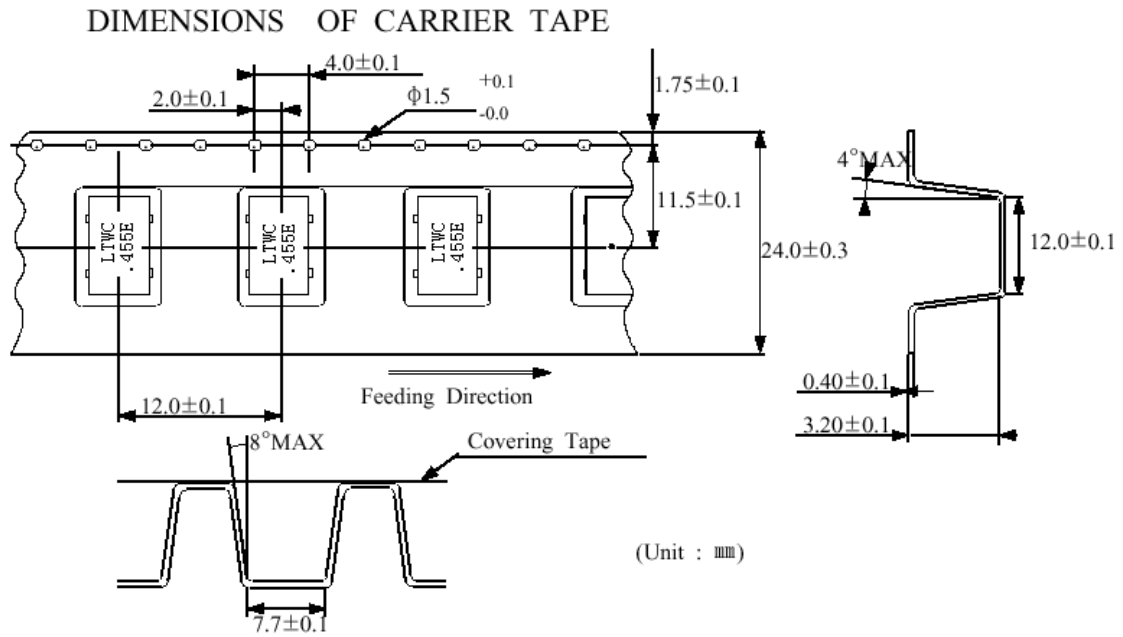

9. DIMENSIONS OF REEL

