


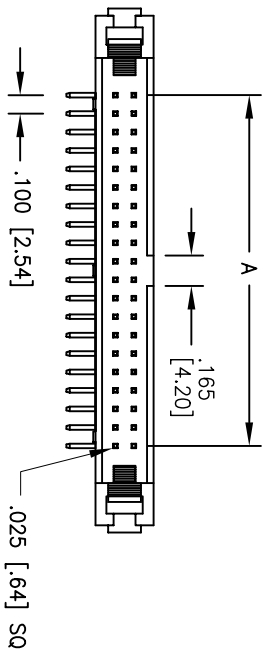


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/29/04	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

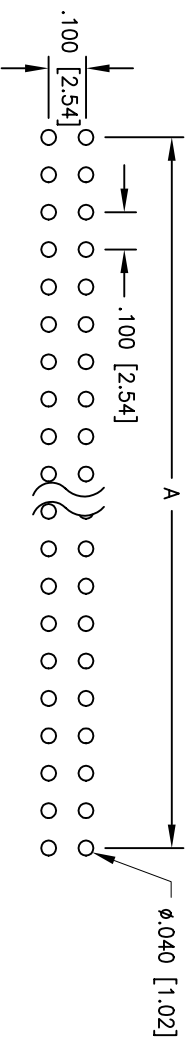

Header with Long Ejector/Latch for  
Sockets with Strain Reliefs

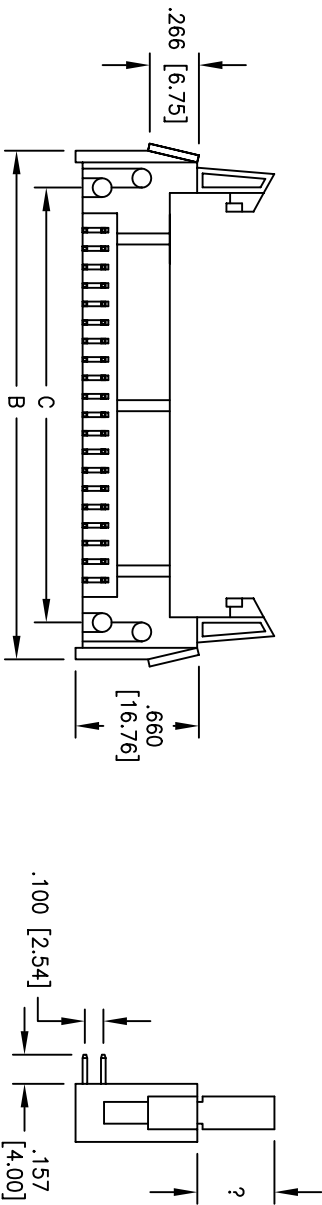

**SPECIFICATIONS:**

- Material: Insulator: PBT, rated UL 94V-0
- Insulator color: Black
- Contacts: Brass
- Plating: Gold Flash over Nickel underplate overall
- Electrical:
  - Operating voltage: 250 VAC max
  - Current rating: 3 Amps max
  - Contact resistance: 20 mohms max
  - Insulation resistance: 5000 Mohms min @ 500 VDC
  - Dielectric withstanding voltage: 1000 VAC for 1 minute
- Temperature Rating: Operating temperature: -65°C to +125°C

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		INCHES		HOLDERS	
X	± .10	ØX	± .10		
.XX	± .020	ØXX	± .015		
.XXX	± .015	ØXXX	± .010		
APPROVALS		DATE		TITLE	
DRAWN	SS	9/29/04		LATCHED BOX HEADER, RIGHT ANGLE, PCB MOUNT, LONG EJECTOR LATCHES	
CHECKED				SIZE PART NO. MHR-X-HUAL	
APPROVED				SCALE: NTS SHEET 1 OF 2	

**ADAM TECH**

909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710