

4832, solder terminal, screened, 3-pole, Audio Plug/sockets, 3.5 mm



**Description**

- Solder terminal :  
for cable mounting
- Audio entrances and exits
- Data and Signal transfer
- Audio Plug: 3-pole , shielded , straight

**References**


Alternative: Housing insulated [4832.1310](#); [4832.1320](#)

**Technical Data**

Diameter	3.5 mm
Number of Poles	3-pole
Ratings DC	0.5 A / 30 VDC
Ratings AC	0.5 A / 30 VAC
Dielectric Strength	500VDC
Insulation Resistance	> 100 MΩ @ 500VDC

Allowable Operation Temp.	-20 °C to 70 °C
Terminal	solder terminal nickel-plated
Housings	screened
Style	straight
Lifetime	5000 Insertions

**Dimensions**

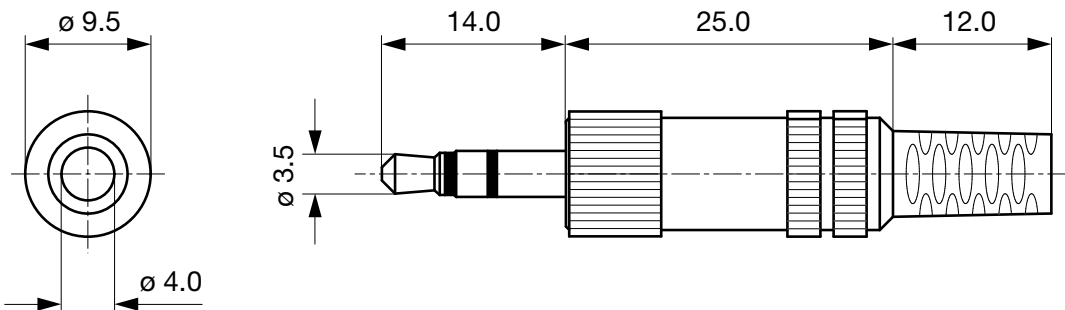

Cable diameter max. 4.0 mm

**All Variants**

Product group	Diameter [mm]	Number of Poles	Terminal	Order Number
Audio Plug/sockets	3.5	3-pole	solder terminal	<a href="#">4832.1300</a>

Most Popular.

Availability for all products can be searched real-time: <http://www.schurter.com/Stock-Check/Stock-Check-SCHURTER>

**Packaging unit** 100 Pcs

## Mating Outlets/Connectors

### Category / Description

[Audio Plug/Sockets Overview complete](#)



4832, solder terminal, screened, 3-pole, Audio Plug/Sockets, 3.5 mm	4832.2300
4832, PCB terminals, screened, 3-pole, Audio Plug/Sockets, 3.5 mm	4832.2320
4832, PCB terminals, insulated, 3-pole, Audio Plug/Sockets, 3.5 mm	4832.2330
4832, solder terminal, insulated, 3-pole, Audio Plug/Sockets, 3.5 mm	4832.3300

[Audio Plug/Sockets further types to 4832.1300](#)