


*Products for tomorrow...*

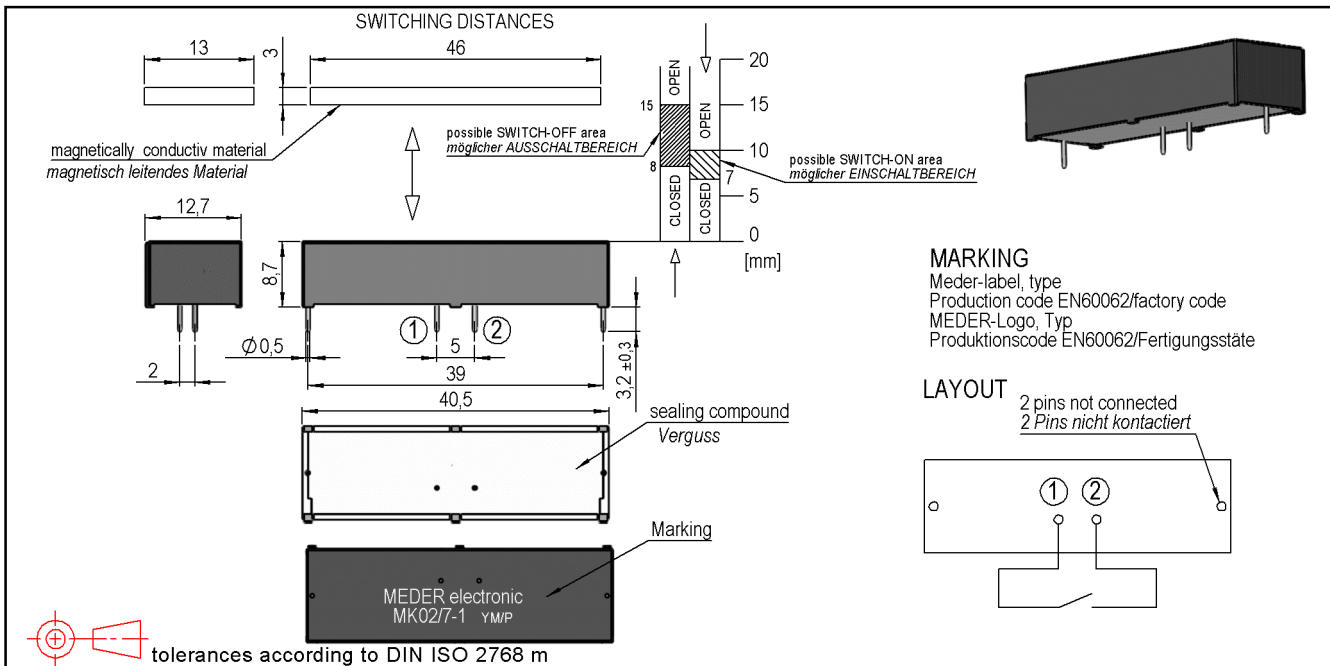

Magnetic properties	Conditions	Min	Typ	Max	Unit
Pull in	at 20 °C	7		10	mm
Drop out	at 20 °C	8		15	mm
Test equipment		SV 026			

Special Product Data	Conditions	Min	Typ	Max	Unit
Contact - form		A - NO			
Contact rating	Any DC combination of V & A not to exceed their individual max.'s			10	W
operating voltage	DC or Peak AC			200	V
operating ampere	DC or Peak AC			0,5	A
Switching current	DC or Peak AC			0,4	A
Sensor-resistance	measured with 40% overdrive			150	mOhm
Housing material		PBT glass fibre reinforced			
Case color		black			
Sealing compound		Polyurethan			

Environmental data	Conditions	Min	Typ	Max	Unit
Operating temperature		-30		80	°C
Storage temperature		-30		80	°C

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Standex Electronics:](#)

[MK02/7-1](#)