

## DESCRIPTION

This series of compact, open PCB constructed, AC-DC switching power supplies are capable of delivering 37.5-64 watts of continuous output power at convection cooling. They operate at 90-264 VAC input voltage without the need of voltage ion, and are suited for medical, information technology and industrial applications. Approval to both EN60601-1 and EN60950-1 safety standards improves design-in time and reduces end equipment compliance costs.



## FEATURES

- Medical and ITE approvals
- Compact size 2" x 4" x 1.18"
- Single, dual and triple outputs
- Wide-range input 90-264 VAC
- Low earth leakage current
- Level B emissions
- RoHS compliant

## WATTAGE

**Wattage:** 64W

## DIMENSION

**Dimension:** 101.6mm(L) x 50.8mm(W) x 30.0mm(H)

## INPUT SPECIFICATION

**Input Range:** 90-264 Vdc  
**Input Frequency:** 47-63 Hz  
**Input Current:** 1.3A(rms) for 100VAC,  
 0.7A(rms) for 240VAC  
**Leakage Current:** 150 µA max. @ 264 VAC, 63 Hz

## SAFETY STANDARD APPROVAL



## OUTPUT SPECIFICATION

### Ripple & Noise:

Maximum excursion of 4% or better on all models, recovering to 1% of final value within 500 us after a 25% step load change  
 All outputs protected to short circuit conditions.

### Over Current Protection:

## GENERAL SPECIFICATION

**Efficiency:** 80~88% typical except PM42-31-3A and PM42-31-5A at 75% typical

## ENVIRONMENTAL SPECIFICATION

**TEMP.Range:** Operating Temperature: -10°C to +70°C  
 Storage Temperature: -40°C to +85°C  
**MTBF:** 400,000 hours at full load at 25°C ambient, calculated per MIL-HDBK-217F


### \*Output Voltage and Current Rating

	<b>+24V</b>
<b>Ripple-Noise(R-P) mV</b>	240mV
<b>Regulation Load %</b>	±2%
<b>Output Max.(A)</b>	2.7A
<b>Output Min.(A)</b>	0A

## NOTES

1. Safety approvals are for PCB form only. To order unit with cover fitted, change suffix "A" to "C".
2. Maximum current of output #1 of multi-output models can be 8 A at 5 CFM forced air provided by user.
3. It is rated at 37.5 W maximum at convection cooling or 47.5 W maximum at 5 CFM forced air cooling by user.
4. The output voltages of a multiple output model may go outside of the stated tolerance when an output load current is out of stated limits. All models may be operated at no-load without damage.
5. Ripple and noise is maximum peak to peak voltage value measured at output within 20 MHz bandwidth, at rated line voltage and output load ranges, and with a 10 µF tantalum capacitor in parallel with a 0.1 µF ceramic capacitor across the output.

## MECHANICAL SPECIFICATION

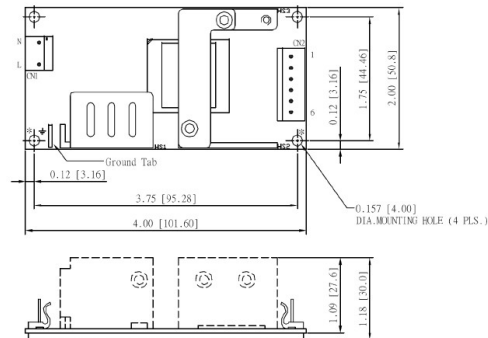

This content is subject to change, please refer to specification for more detail.  
 FSP reserve the right to change the content without prior notice