



# NEC's 1310 nm InGaAsP MQW FP PULSED LASER DIODE IN DIP PACKAGE FOR OTDR APPLICATION (150 mW MIN)

**NX7361JB-BC**

## FEATURES

- **HIGH OUTPUT POWER:**  
Pf = 150 mW at IFP = 1000 mA  
PW = 10 ms, Duty = 1%
- **LONG WAVELENGTH:**  
 $\lambda_c = 1310$  nm
- **INTERNAL THERMOELECTRIC COOLER, THERMISTOR**
- **HERMETICALLY SEALED 14 PIN DUAL-IN-LINE PACKAGE**
- **SINGLE MODE FIBER PIGTAIL**

## DESCRIPTION

NEC's NX7361JB-BC is a 1310 nm developed strained Multiple Quantum Well (st-MQW) structured pulsed laser diode DIP module with single mode fiber and internal thermoelectric cooler. It is designed for light sources of optical measurement equipment (OTDR).

## ELECTRO-OPTICAL CHARACTERISTICS (T<sub>LD</sub> = 25°C, T<sub>c</sub> = -20 to +65°C, unless otherwise specified)

PART NUMBER			NX7361JB-BC		
SYMBOLS	PARAMETERS AND CONDITIONS	UNITS	MIN	TYP	MAX
V <sub>FP</sub>	Forward Voltage, I <sub>F</sub> = 30 mA	V		2.5	4.0
I <sub>TH</sub>	Threshold Current	mA		35	65
P <sub>f</sub>	Optical Output Power from Fiber, I <sub>FP</sub> = 1000 mA <sup>1</sup> I <sub>FP</sub> = 600 mA <sup>1</sup> I <sub>FP</sub> = 400 mA <sup>1</sup>	mW	150 90 40		
$\lambda_c$	Center Wavelength, RMS, I <sub>FP</sub> = 400, 600, 1000 mA <sup>1</sup>	nm	1290	1310	1330
$\sigma$	Spectral Width, RMS, I <sub>FP</sub> = 400, 600, 1000 mA <sup>1</sup>	nm		3.0	7.0
t <sub>r</sub>	Rise Time, 10-90%	ns		1.0	2.0
t <sub>f</sub>	Fall Time, 90-10%	ns		1.4	2.0

Note:

1. PW = 10  $\mu$ s, Duty = 1%.

## ELECTRO-OPTICAL CHARACTERISTICS APPLICABLE TO THERMISTOR AND TEC: (T<sub>LD</sub> = 25°C, T<sub>c</sub> = -20 to +65°C, unless otherwise specified)

PART NUMBER			NX7361JB-BC		
SYMBOLS	PARAMETERS AND CONDITIONS	UNITS	MIN	TYP	MAX
R	Thermistor Resistance, T <sub>LD</sub> = 25°C	R	9.5	10.0	10.5
B	B Constant	K	3350	3450	3550
I <sub>c</sub>	Cooler Current, $\Delta T = 40$ K	A		0.6	1.0
V <sub>c</sub>	Cooler Voltage, $\Delta T = 40$ K	V		1.1	1.5
$\Delta T^1$	Cooling Capacity, I <sub>c</sub> = 0.8 A	K	40		

Notes:

1.  $\Delta T = |T_c - T_{LD}|$ .

**ABSOLUTE MAXIMUM RATINGS<sup>1</sup>**

(T<sub>c</sub> = 25°C, unless otherwise specified)

SYMBOLS	PARAMETERS	UNITS	RATINGS
I <sub>FP</sub>	Pulsed Forward Current <sup>2</sup>	A	1.2
V <sub>R</sub>	Reverse Voltage	V	2.0
I <sub>c</sub>	Cooler Current	A	1.0
V <sub>c</sub>	Cooler Voltage	V	2.0
I <sub>t</sub>	Thermistor Current	mA	0.5
V <sub>t</sub>	Thermistor Voltage	V	12.0
T <sub>c</sub>	Operating Case Temperature	°C	-20 to +65
T <sub>STG</sub>	Storage Temperature	°C	-40 to +70
T <sub>SLD</sub>	Lead Soldering Temperature (10 sec)	°C	260

Notes:


1. Operation in excess of any one of these parameters may result in permanent damage.
2. Pulse Condition: Pulse Width (PW) = 10 μs, Duty = 1 %.

**ORDERING INFORMATION**


PART NUMBER	AVAILABLE CONNECTOR
NX7361JB-BC	With FC-UPC Connector

**TYPICAL PERFORMANCE CURVES (T<sub>A</sub> = 25°C)**


**OPTICAL OUTPUT POWER FROM FIBER vs. PULSED FORWARD CURRENT**

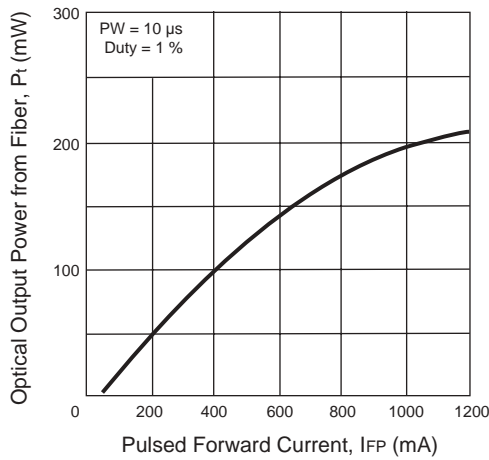

**SPECTRUM**

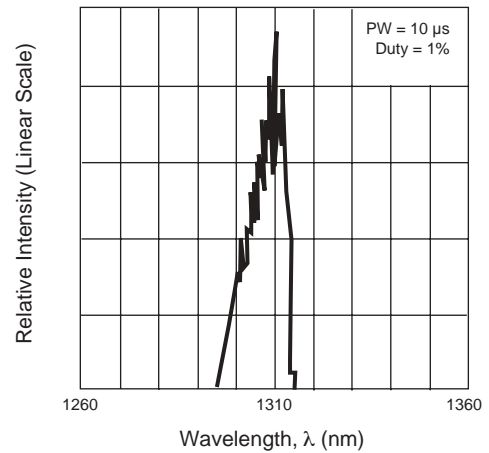


**THERMISTOR RESISTANCE vs. CASE TEMPERATURE**

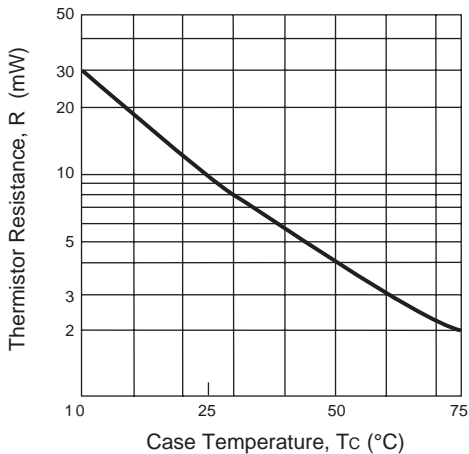


Remark: The graphs indicate nominal characteristics.

**OUTLINE DIMENSIONS** (Units in mm)

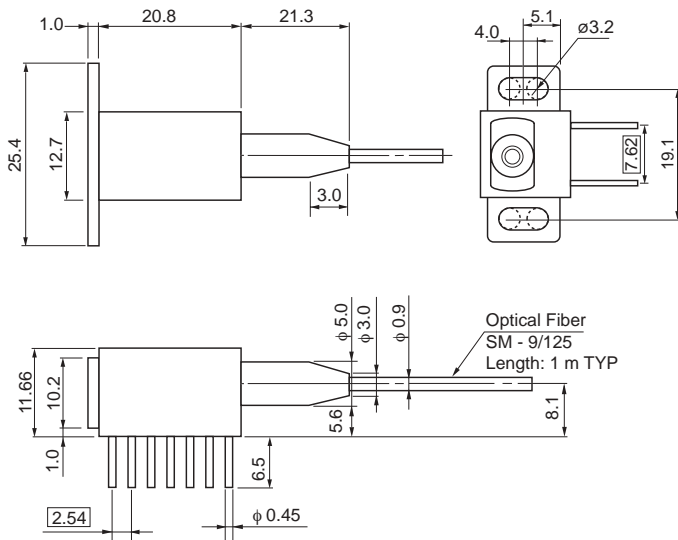

**BOTTOM VIEW**

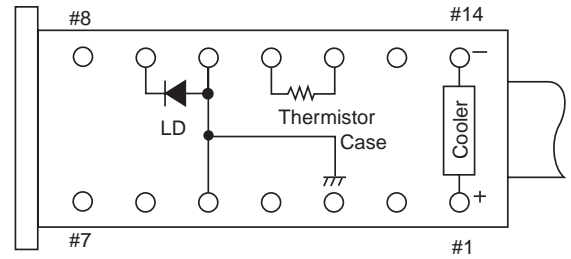

**PIN CONNECTIONS**

PIN No.	FUNCTION	PIN No.	FUNCTION
1	COOLER ANODE	8	NC
2	NC	9	LASER CATHODE
3	NC	10	LASER ANODE, CASE GROUND
4	NC	11	THERMISTOR
5	LASER ANODE, CASE GROUND	12	THERMISTOR
6	NC	13	NC
7	NC	14	COOLER CATHODE

**Life Support Applications**

These NEC products are not intended for use in life support devices, appliances, or systems where the malfunction of these products can reasonably be expected to result in personal injury. The customers of CEL using or selling these products for use in such applications do so at their own risk and agree to fully indemnify CEL for all damages resulting from such improper use or sale.

**CEL California Eastern Laboratories**, Your source for NEC RF, Microwave, Optoelectronic, and Fiber Optic Semiconductor Devices.  
4590 Patrick Henry Drive • Santa Clara, CA 95054-1817 • (408) 988-3500 • FAX (408) 988-0279 • [www.cel.com](http://www.cel.com)

DATA SUBJECT TO CHANGE WITHOUT NOTICE

02/20/2003