

## Specification Sheet


### T520 Series – KO-CAP – KEMET Organic Capacitor Low ESR Tantalum Chip Capacitor with Polymer Electrode

KEMET introduces new ratings to its popular T520 Series KEMET Organic - KO - Capacitor. The KO-CAP is a Tantalum capacitor, with Ta anode and Ta<sub>2</sub>O<sub>5</sub> dielectric. However, a conductive, organic, polymer replaces the MnO<sub>2</sub> as the cathode plate of the capacitor. This results in very low ESR and improved cap retention at high frequency. The KO-CAP also exhibits a benign failure mode, which eliminates the ignition failures that can occur in standard Tantalum types. Note also that KO-CAPs may be operated at voltages up to 80% of rated voltage with equivalent or better reliability than standard tantalums operated at 50% of rated voltage.

The new T520 series captures the best features of multilayer ceramic caps (low ESR and high frequency cap retention), aluminum electrolytics (benign failure mode), and proven solid tantalum technology (volumetric efficiency, surface mount capability, and no wearout mechanism). The KO-CAP can reduce component counts, eliminate through-hole assembly by replacing cumbersome leaded aluminum capacitors, and offer a more cost effective solution to high-cost high-cap ceramic capacitors. These benefits allow the designer to save both board space and money.

The T520 operating temperature range is -55°C to +105°C. Above 85°C, the capacitor voltage rating drops to 0.8 times rated voltage at 105°C.

### Outline Drawing

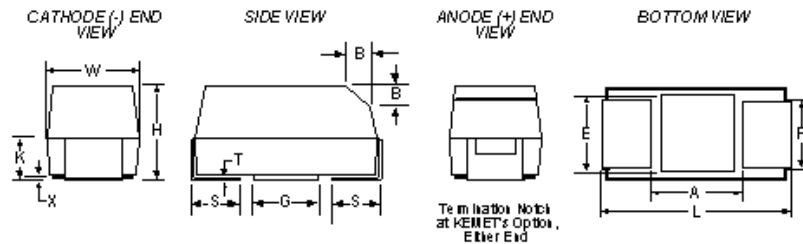

### Dimensions - Millimeters


Case Size		L	W	H	K ±0.20	F ±0.1	S ±0.3	X(Ref)	T(Ref)	A(Min)	G(ref)	E(ref)
KEMET	EIA											
B	3528-21	3.5 ± 0.2	2.8 ± 0.2	1.9 ± 0.2	1.1	2.2	0.8	0.10 ± 0.10	0.13	1.1	1.8	2.2
V	7343-20	7.3 ± 0.3	4.3 ± 0.3	1.9 ± 0.1	1.1	2.4	1.3	0.05	0.13	3.8	3.5	3.5
D	7343-31	7.3 ± 0.3	4.3 ± 0.3	2.8 ± 0.3	1.5	2.4	1.3	0.10 ± 0.10	0.13	3.8	3.5	3.5
X	7343-43	7.3 ± 0.3	4.3 ± 0.3	4.0 ± 0.3	2.3	2.4	1.3	0.10 ± 0.10	0.13	3.8	3.5	3.5

### T520 Ratings & Part Number Reference


Cap µF (±20%)	Case Size	KEMET Part Number	DC Leakage µA +25°C Max	DF % 120 Hz + 25°C Max	ESR mW 100kHz 25° Max	Ripple Current A rms 100 kHz Max		
						25°C	85°C	105°C
100	B/3528-21	T520B107M003AS	30	8%	70	1.10	0.99	0.44
330	V/7343-20	T520V337M003AS	99	10%	25	2.20	2.00	0.90
68	B/3528-21	T520B686M004AS	27	8%	70	1.10	0.99	0.44
220	V/7343-20	T520V227M004AS	88	10%	45	1.70	1.50	0.70
220	V/7343-20	T520V227M004AS4350	88	10%	25	2.20	2.00	0.90
470	D/7343-31	T520D477M004AS	188	10%	40	1.90	1.70	0.80
680	X/7343-43	T520X687M004AS	272	10%	35	2.20	2.00	0.90
47	B/3528-21	T520B476M006AS	30	8%	70	1.10	0.99	0.44
150	V/7343-20	T520V157M006AS	95	10%	45	1.70	1.50	0.70
150	V/7343-20	T520V157M006AS4350	95	10%	25	2.20	2.00	0.90
150	D/7343-31	T520D157M006AS	95	10%	55	1.70	1.50	0.70
220	D/7343-31	T520D227M006AS	139	10%	50	1.70	1.60	0.70
220	D/7343-31	T520D227M006AS4350	139	10%	40	1.90	1.70	0.80
330	D/7343-31	T520D337M006AS	208	10%	45	1.80	1.60	0.70
330	D/7343-31	T520D337M006AS4350	208	10%	40	1.90	1.70	0.80
330	D/7343-31	T520D337M006AS4351	208	10%	25	2.40	2.20	1.00
470	X/7343-43	T520X477M006AS	296	10%	40	2.00	1.80	0.80
68	V/7343-20	T520V686M010AS	68	10%	60	1.40	1.20	0.50
100	V/7343-20	T520V107M010AS	100	10%	50	1.60	1.40	0.60
100	D/7343-31	T520D107M010AS	100	10%	80	1.40	1.20	0.50
100	D/7343-31	T520D107M010AS4350	100	10%	55	1.70	1.50	0.70
150	D/7343-31	T520D157M010AS	150	10%	55	1.70	1.50	0.70
150	D/7343-31	T520D157M010AS4350	150	10%	40	1.90	1.70	0.80
220	D/7343-31	T520D227M010AS	220	10%	40	1.90	1.70	0.80
330	X/7343-43	T520X337M010AS	330	10%	40	2.00	1.80	0.80
47	D/7343-31	T520D476M016AS	75	10%	70	1.50	1.35	0.60

Note: New values are listed in italics and blue.


## T520 Ordering Information

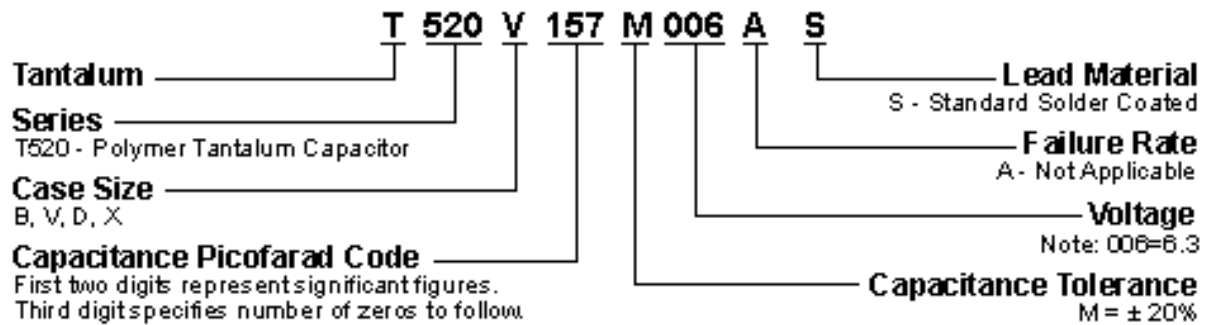

## Component Marking

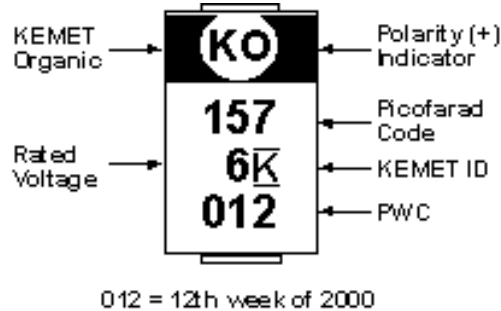


## Recommended Mounting Pad Geometries - Millimeters

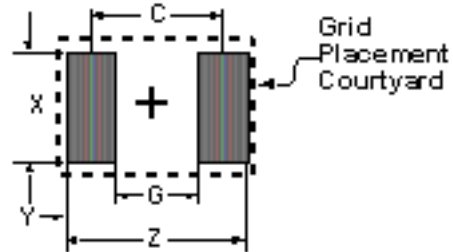

## Land Pattern Dimensions for Reflow Solder

KEMET/EIA Size Code	Pad Dimensions				
	Z	G	X	Y (ref)	C (ref)
B/3528-21	5.00	1.10	2.50	1.95	2.75
V/7343-20, D/7343-31, X/7343-43	8.90	3.80	2.70	2.55	6.35


## Capacitance

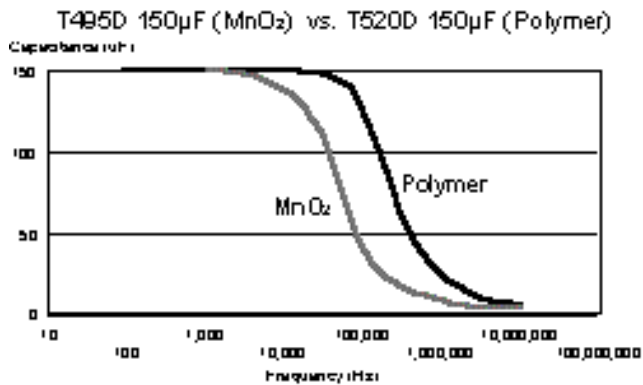

## Tape & Reel Packaging

Case Codes		Tape & Reel Dimensions				
KEMET	EIA	Tape Width mm	Pitch mm ± 0.1		Reel Quantity	
			Part	Sprocket	180mm (7" dia)	330mm (13" dia)
B	3528-21	8 ± 0.3	4	4	2000	8000
V	7343-20	12 ± 0.3	8	4	1000	3000
D	7343-31	12 ± 0.3	8	4	500	2500
X	7343-43	12 ± 0.3	8	4	500	2000

## ESR and Impedance

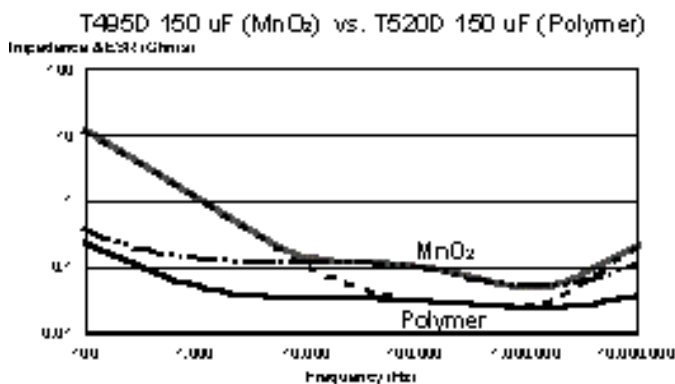

## T520 Series Construction

