C0603C0G1H4R7C030BA



sions in mm

TDK item description C0603C0G1H4R7CT****

Applications	Commercial Grade	
	Please refer to Part No. CGA1A2C0G1H4R7C030BA for Automotive use.	
Feature	General General (Up to 50V)	
Series	C0603 [EIA 0201]	6
Status	Production (Not Recommended for New Design)	Dime

Size		
Length(L)	0.60mm ±0.03mm	
Width(W)	0.30mm ±0.03mm	
Thickness(T)	0.30mm ±0.03mm	
Terminal Width(B)	0.10mm Min.	
Terminal Spacing(G)	0.20mm Min.	
Recommended Land Pattern (PA)	0.25mm to 0.35mm	
Recommended Land Pattern (PB)	0.20mm to 0.30mm	
Recommended Land Pattern (PC)	0.25mm to 0.35mm	

Electrical Characteristics		
Capacitance	4.7pF ±0.25pF	
Rated Voltage	50VDC	
Temperature Characteristic	COG(0±30ppm/°C)	
Q (Min.)	494	
Insulation Resistance (Min.)	10000ΜΩ	


Other	
Soldering Method	Reflow
AEC-Q200	No
Packing	Punched (Paper)Taping [180mm Reel]
Package Quantity	15000pcs


! Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.

C0603C0G1H4R7C030BA




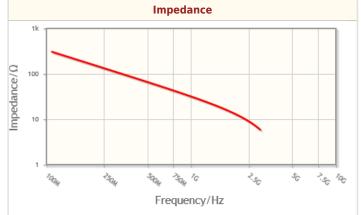


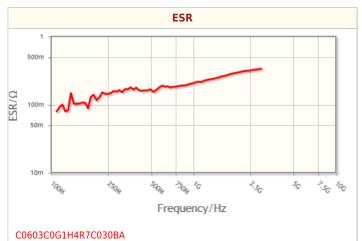


Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

C0603C0G1H4R7C030BA

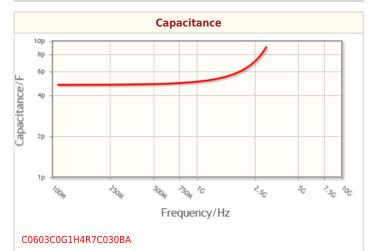

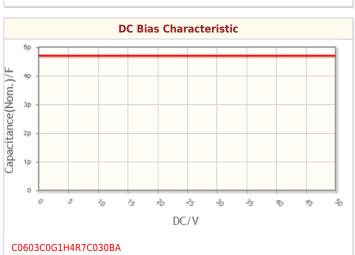

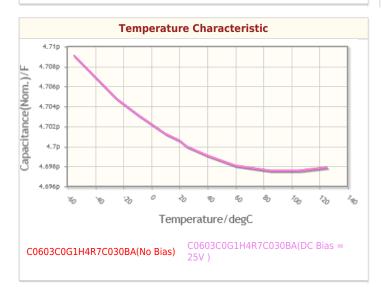

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.


! All specifications are subject to change without notice.

Copyright(c) TDK Corporation. All rights reserved.

C0603C0G1H4R7C030BA



Associated Images

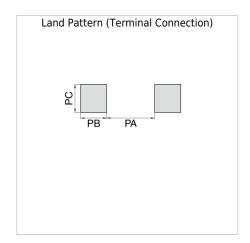

! Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.