

All dimensions are in mm; tolerances according to ISO 2768 m-H

**Interface**

According to 15Z202-1H1L5, Micro Clamp

**Documents**

Tape & reel packaging VG 173.20000  
 Panel piercing MB\_393

**Material and plating**

**Connector parts**

Housing

**Material**

CuBe

**Plating**

0.15 µm Au over 2-3 µm chem. Ni

**Electrical data**

N/A

**Mechanical data**

Mating cycles min. 50  
 Engagement force >2.5 N  
 Disengagement force >3.5 N


**Environmental data**

Temperature range -40°C to +90°C  
 Storage temperature -40°C to +90°C  
 2002/95/EC (RoHS) compliant

**Soldering process**

- Lead free solder process  
 Recommended solder paste SENJU M705-GRN360-K1 V

The component has to withstand 2 times the solder process

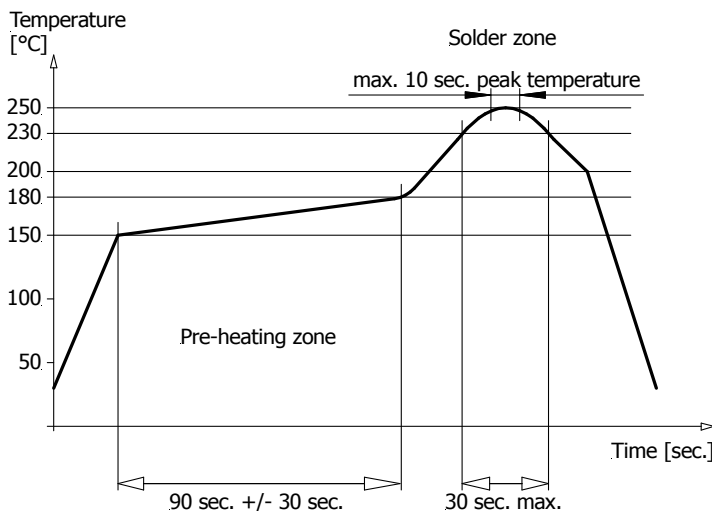

**Packing**

Standard 2000 pcs in tape&reel  
 Weight 0,05 g/pce

RF\_35/06.07/5.0

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
F. Michelmann	28/09/09	F.Michelmann	13.06.12	400	12-0522	A. Streibl	13.06.12
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany <a href="http://www.rosenberger.de">www.rosenberger.de</a>					Tel.: +49 8684 18-0 Fax: +49 8684 18-499 email: <a href="mailto:info@rosenberger.de">info@rosenberger.de</a>		Page 2 / 2