



36 Watt USB Power Delivery 3.0 Adapter with USB-C



Features

- USB-C
- Class B EMI
- Limited Power Source (LPS)
- OVP, OCP, OTP and Short Circuit Protection
- DOE Level VI, CoC V5 Tier 2

Applications

- Mobile Phone
- Tablet
- Notebook
- Networking Devices
- Monitor

Safety Approvals (Preliminary)

- UL/cUL
- CB
- CE

Mechanical Characteristics

- Length: 67mm (2.64in)
- Width: 48mm (1.89in)
- Height: 29mm (1.41in)
- Weight: 130g (.29lbs)

Output Specifications

Model	Prong Style	DC Output Voltage	Current Rating	Ripple ⁽¹⁾ P-P (max.)	Efficiency Level
AQ36A-59FA	US	5V/9V/15V	3A/3A/2.4A	200mV	VI
AQ36E-59FA	EU	5V/9V/15V	3A/3A/2.4A	200mV	VI

Notes: (1) Measured by using a 12 inch twisted pair terminated with a 10uF & 0.1uF ceramic in parallel. Oscilloscope is set to 20MHz.

Phihong is not responsible for any error, and reserves the right to make changes without notice. Please visit our website at www.phihong.com for the most up-to-date specifications and contact information.

Input:

AC Input Voltage Rating
100 to 240V AC

AC Input Voltage Range
90 to 264V AC

AC Input Frequency
50 to 60Hz

Input Current
<0.9A (RMS) maximum at 90Vac @max load

Leakage Current
0.25mA Max.

Inrush Current
90Amax @240Vac/50Hz (Cold start)

Input Power Saving
.075W max @230VAC /50Hz

Output:
Efficiency
US DOE Level VI
CoC V5 Tier 2

Environmental:
Temperature
Operation 0°C to +45°C
Non-operation -40°C to +85°C
Humidity 90% RH max

DC Output Connector
USB Type C

Emissions
FCC Class B
EN55022 Class B

Immunity
IEC61000-4-2:
Level 2, Contact ±4KV, Criteria B
Level 3, Air ±8KV, Criteria B
Level 4, Contact ±8KV, Criteria C
Level 4, Air ±15KV, Criteria C
IEC61000-4-3, Level 2, Criteria A
IEC61000-4-4, Level 2, Criteria B
IEC61000-4-5, Level 3, Criteria B
IEC61000-4-6, Level 2, Criteria A
IEC61000-4-8, Level 1, Criteria A

Hold-up Time
10.3mS minimum at 110V/60Hz, Output 20V/2.25A


Over-Voltage Protection
<20V, shutdown mode

Over-Temperature Protection
Shutdown mode


Over-Current Protection
Output current shall not exceed 4.5A@5V and 9V;
4A@15V

Short-Circuit Protection
Auto Recover

Dielectric Withstand (Hi-pot) Test
Primary to Secondary: 3000V AC for 1 min., 10mA

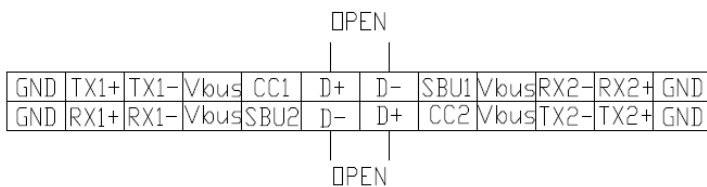

AQ36A-59FA Dimension Diagram Unit: mm (inch)

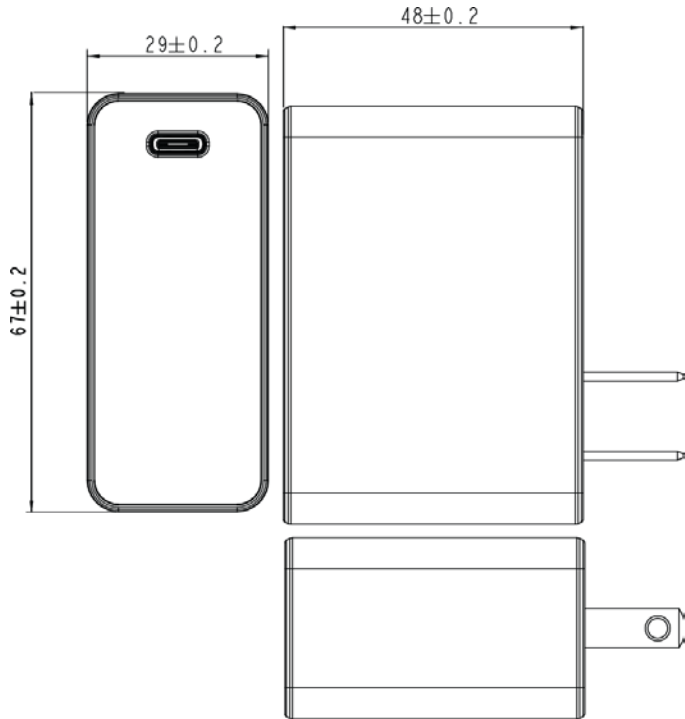

AQ36E-59FA Dimension Diagram Unit: mm (inch)

