

## Surface Mount Fast Recovery Rectifiers

Reverse Voltage - 50 to 1000 V

Forward Current - 1 A

### FEATURES


- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- Ideal for automated placement
- Fast reverse recovery time
- Lead free in comply with EU RoHS 2011/65/EU directives

### MECHANICAL DATA

- Case: SOD-123FL
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 15mg 0.00053oz

### PINNING

| PIN | DESCRIPTION |
|-----|-------------|
| 1   | Cathode     |
| 2   | Anode       |

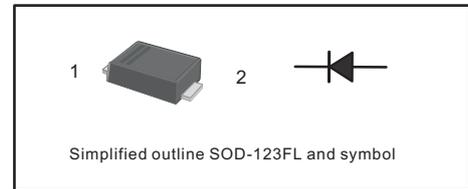

### Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.


Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

| Parameter  | Symbols         | FR101W     | FR102W | FR103W | FR104W | FR105W | FR106W | FR107W | Units              |
|--|-----------------|------------|--------|--------|--------|--------|--------|--------|--------------------|
| Maximum Repetitive Peak Reverse Voltage  | $V_{RRM}$       | 50         | 100    | 200    | 400    | 600    | 800    | 1000   | V                  |
| Maximum RMS voltage  | $V_{RMS}$       | 35         | 70     | 140    | 280    | 420    | 560    | 700    | V                  |
| Maximum DC Blocking Voltage  | $V_{DC}$        | 50         | 100    | 200    | 400    | 600    | 800    | 1000   | V                  |
| Maximum Average Forward Rectified Current at $T_a = 65\text{ }^\circ\text{C}$  | $I_{F(AV)}$     | 1          |        |        |        |        |        |        | A                  |
| Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)                                | $I_{FSM}$       | 30         |        |        |        |        |        |        | A                  |
| Maximum Instantaneous Forward Voltage at 1 A   | $V_F$           | 1.3        |        |        |        |        |        |        | V                  |
| Maximum DC Reverse Current at Rated DC Blocking Voltage<br>$T_a = 25\text{ }^\circ\text{C}$<br>$T_a = 125\text{ }^\circ\text{C}$ | $I_R$           | 5<br>100   |        |        |        |        |        |        | $\mu\text{A}$      |
| Maximum Reverse Recovery Time <sup>1)</sup>  | $t_{rr}$        | 150        |        |        |        | 250    | 500    |        | ns                 |
| Typical Junction Capacitance at $V_R=4\text{V}$ , $f=1\text{MHz}$  | $C_j$           | 15         |        |        |        |        |        |        | pF                 |
| Typical Thermal Resistance <sup>2)</sup>   | $R_{\theta JA}$ | 120        |        |        |        |        |        |        | $^\circ\text{C/W}$ |
| Operating and Storage Temperature Range  | $T_j, T_{stg}$  | -55 ~ +150 |        |        |        |        |        |        | $^\circ\text{C}$   |


1) Measured with  $I_F = 0.5\text{ A}$ ,  $I_R = 1\text{ A}$ ,  $I_{rr} = 0.25\text{ A}$ .

2) P.C.B. mounted with 0.2 X 0.2" (5 X 5 mm) copper pad areas.


**Fig.1 Forward Current Derating Curve**

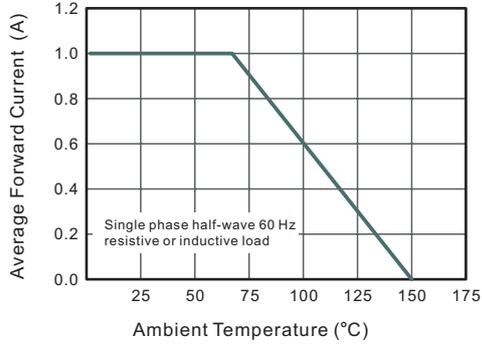


**Fig.2 Typical Reverse Characteristics**

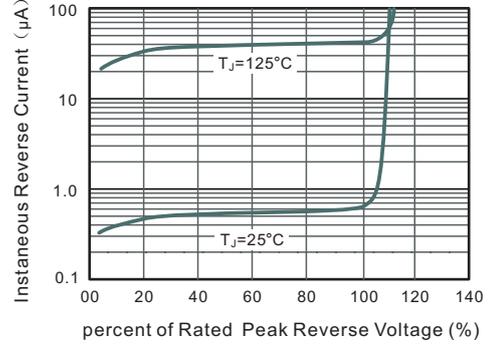


**Fig.3 Typical Instantaneous Forward Characteristics**

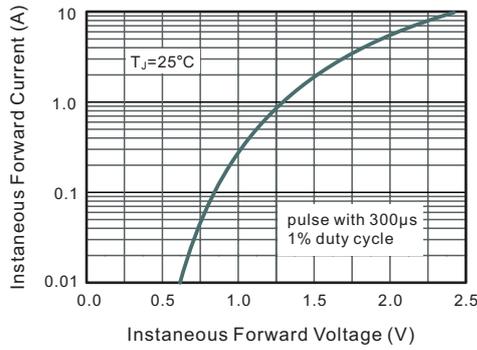

**Fig.4 Typical Junction Capacitance**

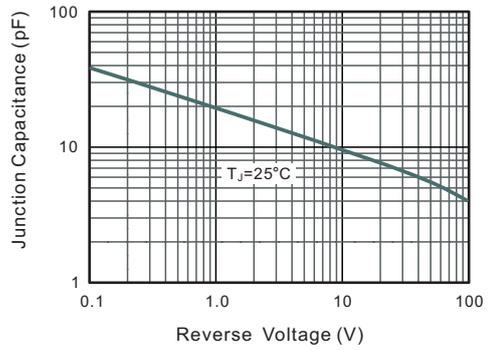


**Fig.5 Maximum Non-Repetitive Peak Forward Surge Current**

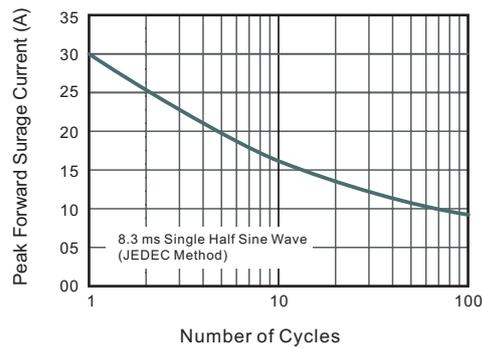


**PACKAGE OUTLINE**

Plastic surface mounted package; 2 leads

SOD-123FL

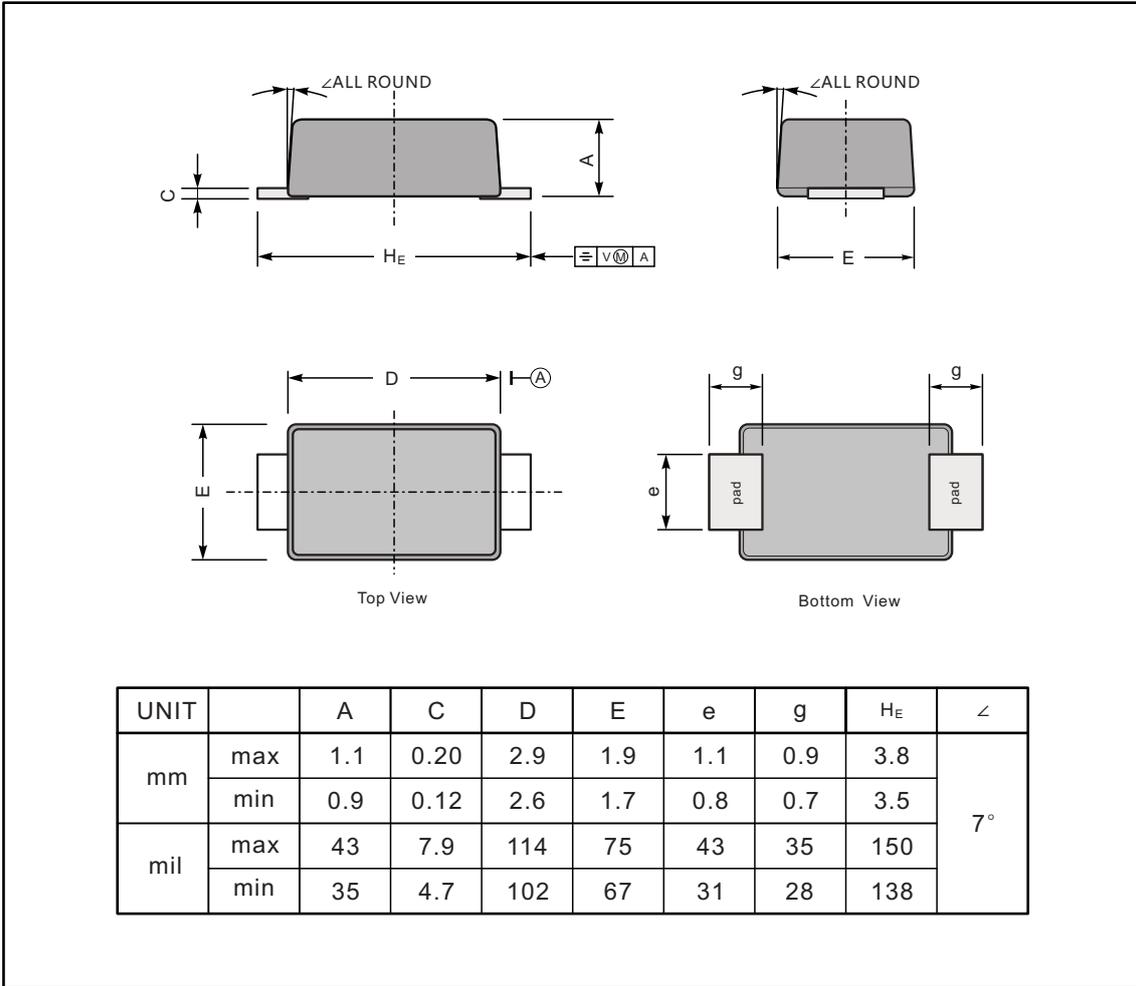

**The recommended mounting pad size**

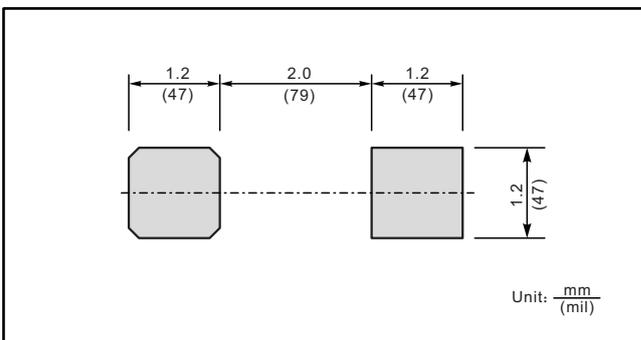

**Marking**

| Type number | Marking code |
|-------------|--------------|
| FR101W      | F1A/F1       |
| FR102W      | F1B/F2       |
| FR103W      | F1D/F3       |
| FR104W      | F1G/F4       |
| FR105W      | F1J/F5       |
| FR106W      | F1K/F6       |
| FR107W      | F1M/F7       |