



# H11L1, H11L2, H11L3

## Schmitt Trigger Output 6-Pin Optocoupler

### Features

- High isolation 5000 VRMS
- DC input with Schmitt Trigger output
- 1MHz(NRZ) data rate
- Temperature range - 55 °C to 100 °C


### Applications

- Line Receiver
- Logic to Logic Isolator
- Microprocessor system interface
- AC to TTL conversion

### Description


The H11L1, H11L2 and H11L3 series consist of a Schmitt Trigger optically coupled to a gallium arsenide Infrared-emitting diode in a 6-lead DIP package with different lead forming options.

### Package Outline

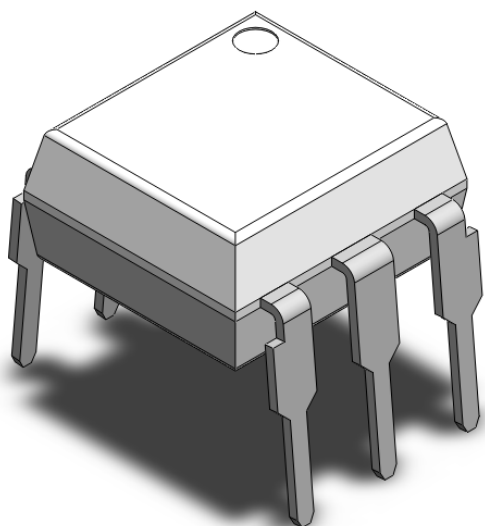

Note: Different lead forming options available. See package dimension.

### Schematic

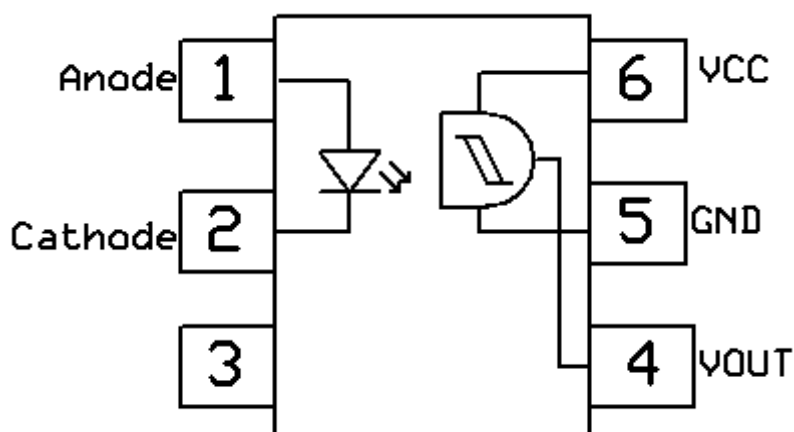



# H11L1, H11L2, H11L3

## Schmitt Trigger Output 6-Pin Optocoupler

### Absolute Maximum Rating at 25°C

<b>Symbol</b>	<b>Parameters</b>	<b>Ratings</b>	<b>Units</b>	<b>Notes</b>
V <sub>ISO</sub>	Isolation voltage	5000	V <sub>RMS</sub>	
T <sub>OPR</sub>	Operating temperature	-55 ~ +100	°C	
T <sub>STG</sub>	Storage temperature	-55 ~ +150	°C	
T <sub>SOL</sub>	Soldering temperature	260	°C	
<b>Emitter</b>				
I <sub>F</sub>	Forward current	60	mA	
I <sub>F(TRANS)</sub>	Peak transient current (≤1μs P.W,300pps)	1	A	
V <sub>R</sub>	Reverse voltage	6	V	
P <sub>D</sub>	Power dissipation	100	mW	
<b>Detector</b>				
P <sub>D</sub>	Power dissipation	150	mW	
V <sub>o</sub>	Output Voltage	0 to 16	V	
V <sub>CC</sub>	Supply Voltage	3 to 16	V	
I <sub>o</sub>	Output Current	50	mA	



# H11L1, H11L2, H11L3

## Schmitt Trigger Output 6-Pin Optocoupler

### Electrical Characteristics $T_A = 25^\circ\text{C}$ (unless otherwise specified)

#### Emitter Characteristics

Symbol	Parameters	Test Conditions	Min	Typ	Max	Units	Notes
$V_F$	Forward voltage	$I_F = 10\text{mA}$		1.24	1.4	V	
$I_R$	Reverse Current	$V_R = 6\text{V}$	-	-	5	$\mu\text{A}$	
$C_{IN}$	Input Capacitance	$f = 1\text{MHz}$	-	45	-	pF	

#### Detector Characteristics

Symbol	Parameters	Test Conditions	Min	Typ	Max	Units	Notes
$V_{CC}$	Supply Voltage		3	-	15	V	
$I_{CCH}$	Logic High Supply Current	$I_F = 0\text{mA}$ , $V_{CC} = 5\text{V}$		1.5	5	mA	
$I_{OH}$	Logic High Output Current	$I_F = 0\text{mA}$ , $V_{CC} = V_O = 15\text{V}$			100	$\mu\text{A}$	

#### Transfer Characteristics

Symbol	Parameters	Test Conditions	Min	Typ	Max	Units	Notes
$I_{CCL}$	Logic Low Supply Current	$I_F = 10\text{mA}$ , $V_{CC} = 5\text{V}$		1.5	5	mA	
$I_{F(ON)}$	Input Threshold Current	H11L1	$V_{CC} = 5\text{V}$ , $R_L = 270\ \Omega$			1.6	mA
		H11L2				10	mA
		H11L3				5	mA
$I_{F(OFF)}$	Off Threshold Current	$V_{CC} = 5\text{V}$ , $R_L = 270\ \Omega$	0.3	1		mA	
$I_{F(ON)}/I_{F(OFF)}$	Hysteresis Ratio		0.5		0.9		
$V_{OL}$	Logic Low Output Voltage	$I_F = I_{F(ON)} \text{ Max}$ , $V_{CC} = 5\text{V}$ , $R_L = 270\ \Omega$			0.4	V	
$R_{IO}$	Isolation Resistance	$V_{IO} = 500\text{V}_{DC}$	$1 \times 10^{11}$			$\Omega$	
$C_{IO}$	Isolation Capacitance	$f = 1\text{MHz}$		0.25		pF	

#### Switching Characteristics







Symbol	Parameters	Test Conditions	Min	Typ	Max	Units	Notes
$t_{ON}$	Turn On Time	$I_F = I_{F(ON)}$ , $V_{CC} = 5\text{V}$ , $R_L = 270\ \Omega$	-	-	3.8	$\mu\text{s}$	
$t_r$	Rise Time		-	0.1	-		
$t_{OFF}$	Turn Off Time		-	-	3.8		
$t_f$	Fall Time		-	0.1	-		
	Data Rate		-	1	-	MHz	



# H11L1, H11L2, H11L3

## Schmitt Trigger Output 6-Pin Optocoupler

### Typical Characteristic Curves

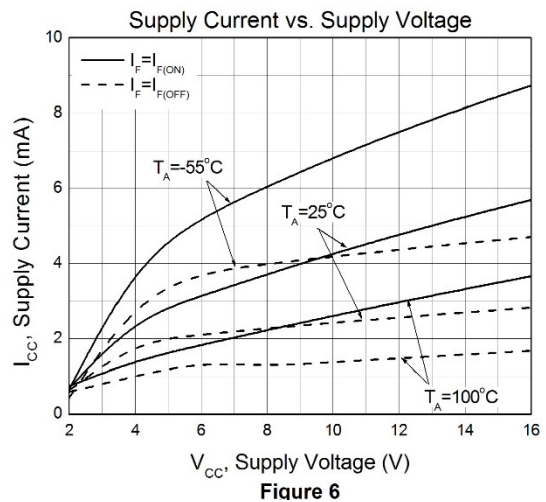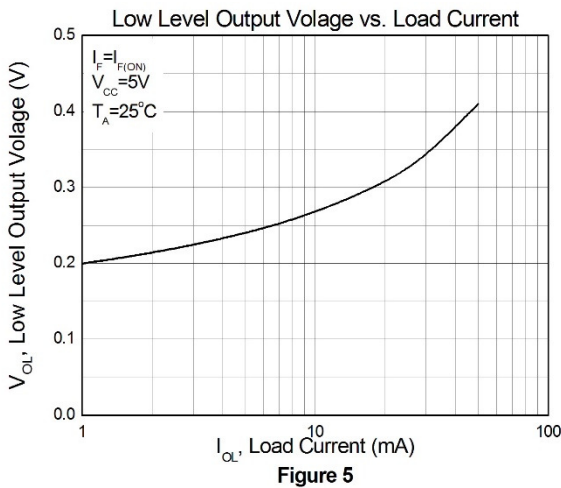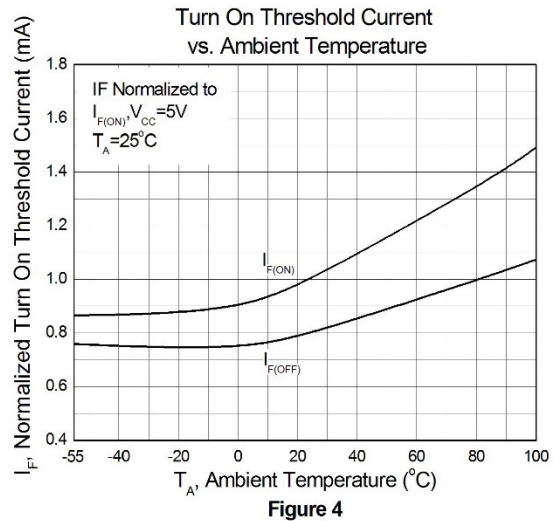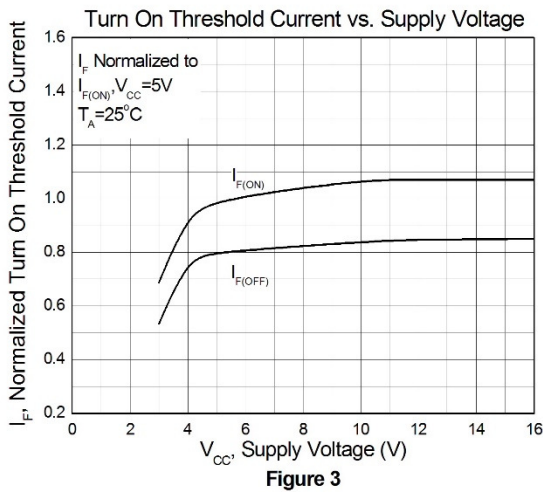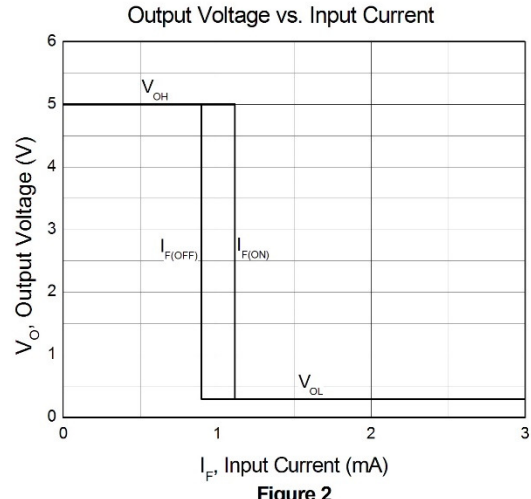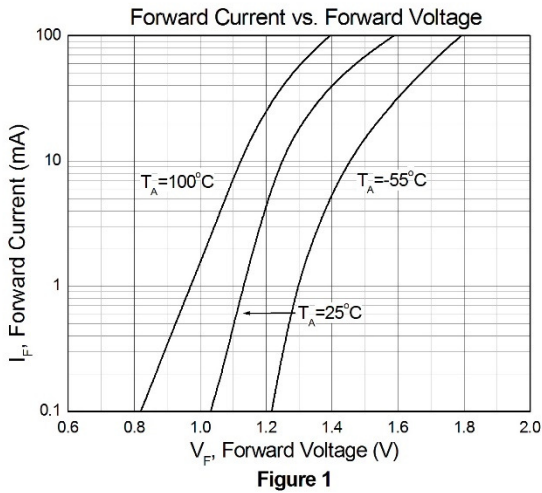




# H11L1, H11L2, H11L3


## Schmitt Trigger Output 6-Pin Optocoupler

### Package Dimension *Dimensions in mm unless otherwise stated*

#### Standard DIP – Through Hole

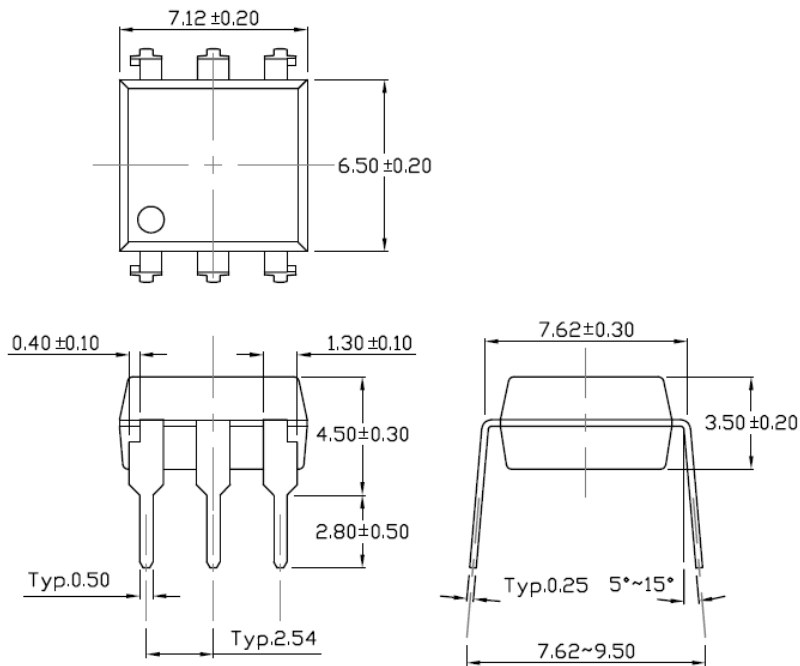

#### Wide Lead Forming – Through Hole (M Type)

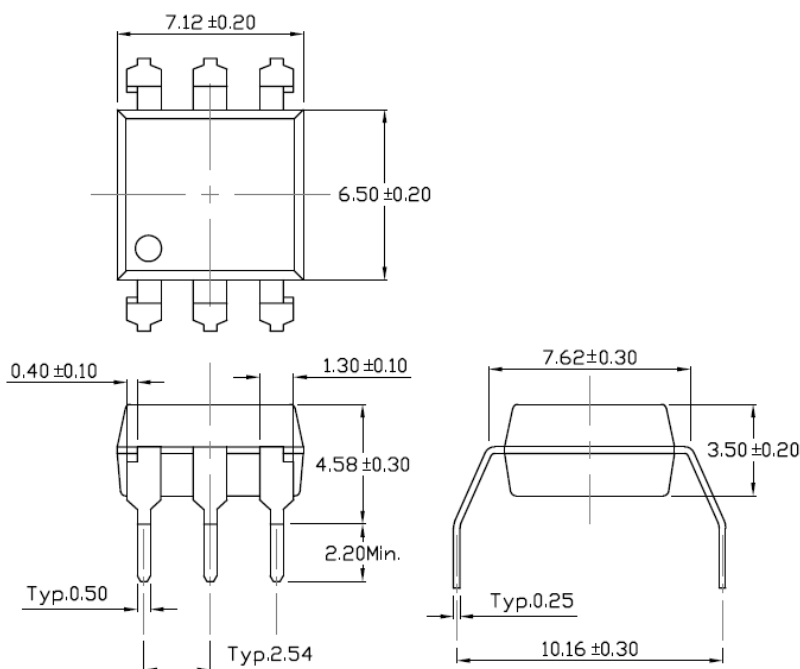





# H11L1, H11L2, H11L3

## Schmitt Trigger Output 6-Pin Optocoupler

### Surface Mount Forming (S Type)

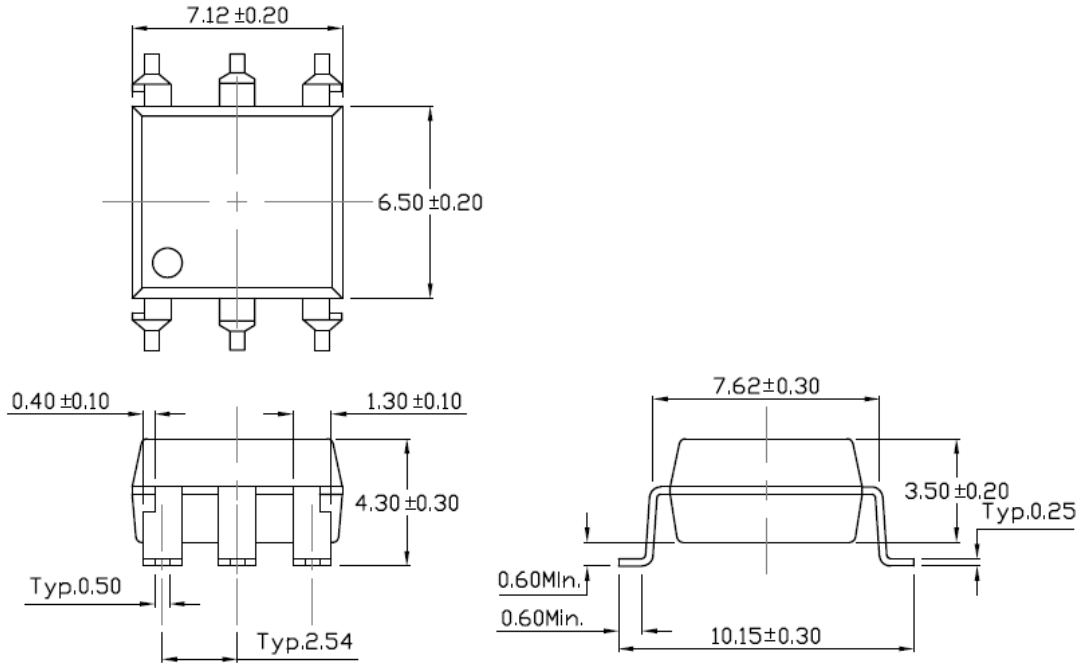

### Surface Mount Forming (Low Profile) (SL Type)

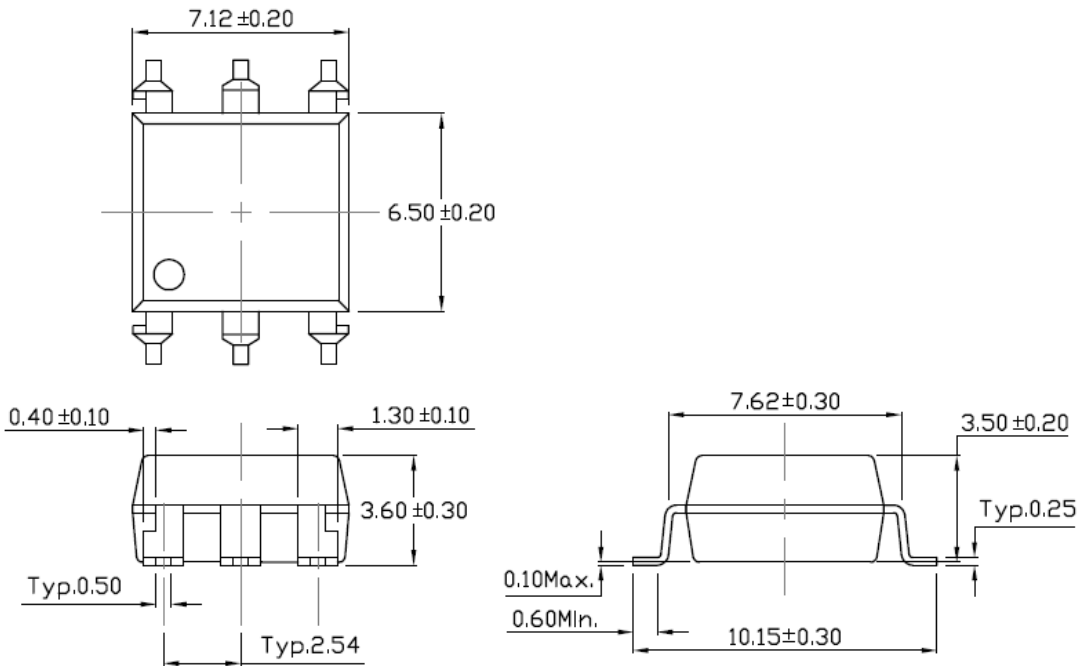





# H11L1, H11L2, H11L3

## Schmitt Trigger Output 6-Pin Optocoupler

### Recommended Solder Mask *Dimensions in mm unless otherwise stated*

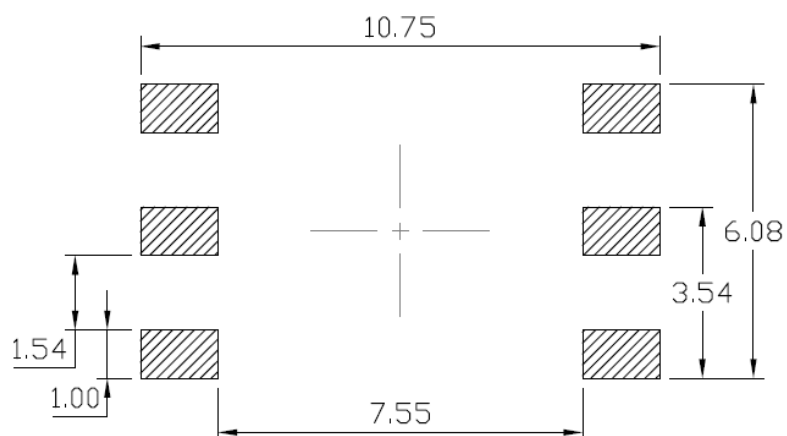

### Marking Information

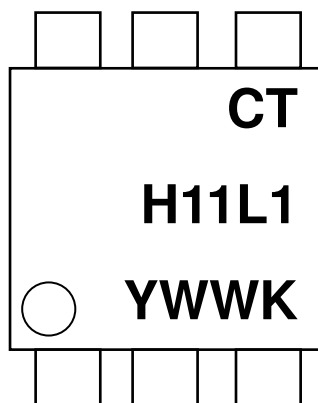

#### Note:

- CT : Denotes "CT Micro"
- H11L1 : Part Number
- Y : Fiscal Year
- WW : Work Week
- K : Manufacturing Code



# H11L1, H11L2, H11L3

## Schmitt Trigger Output 6-Pin Optocoupler

---

### Ordering Information

#### H11LX(Y)(Z)-G

X = Part No. (X=1,2,3)

Y = Lead form option (S, SL, M or none)

Z = Tape and reel option (T1, T2 or none)

G= Material option (G: Green, None: Non-green)

<b>Option</b>	<b>Description</b>	<b>Quantity</b>
None	Standard 6 Pin Dip	65Units/Tube
M	Gullwing (400mil) Lead Forming	65Units/Tube
S(T1)	Surface Mount Lead Forming – With Option 1 Taping	1000 Units/Reel
S(T2)	Surface Mount Lead Forming – With Option 2 Taping	1000 Units/Reel
SL(T1)	Surface Mount (Low Profile) Lead Forming– With Option 1 Taping	1000 Units/Reel
SL(T2)	Surface Mount (Low Profile) Lead Forming – With Option 2 Taping	1000 Units/Reel






# H11L1, H11L2, H11L3


## Schmitt Trigger Output 6-Pin Optocoupler

### Carrier Tape Specifications *Dimensions in mm unless otherwise stated*

#### Option S(T1) & SL(T1)

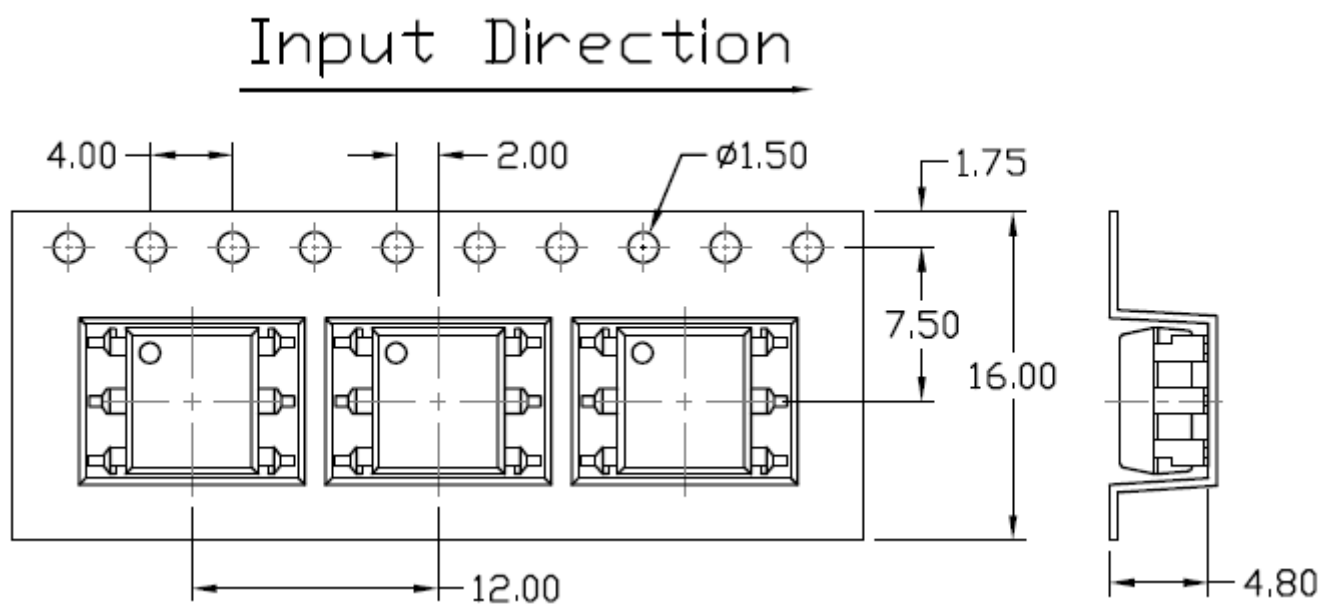

#### Option S(T2) & SL(T2)

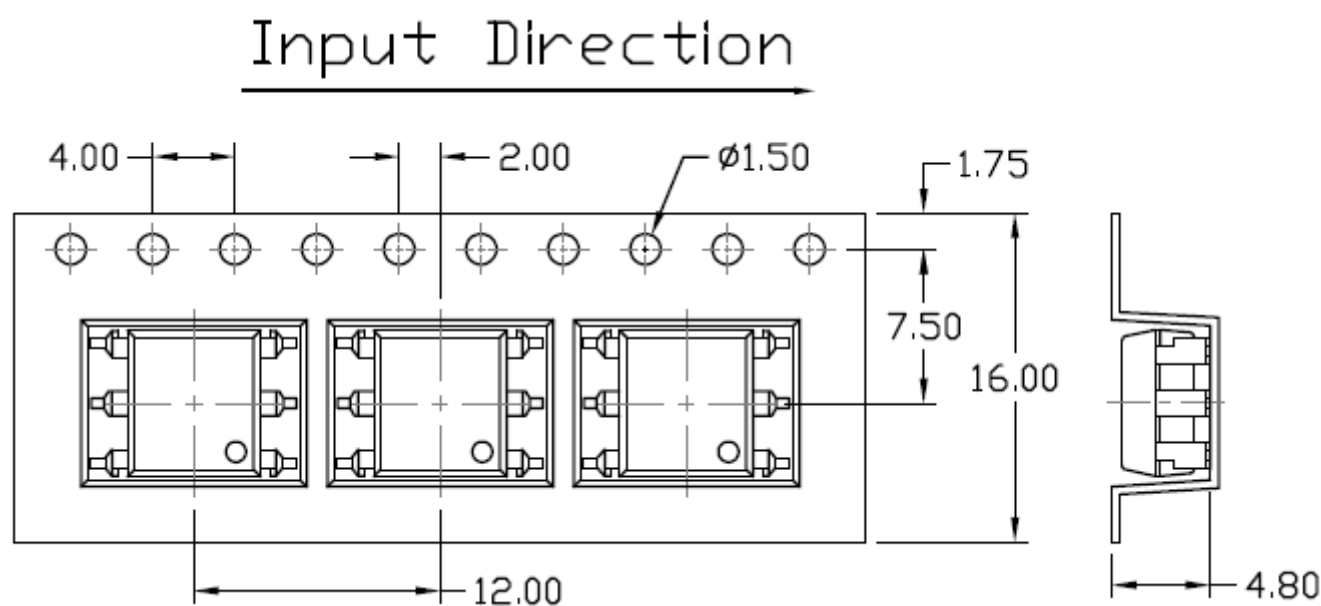




# H11L1, H11L2, H11L3

## Schmitt Trigger Output 6-Pin Optocoupler

### Reflow Profile

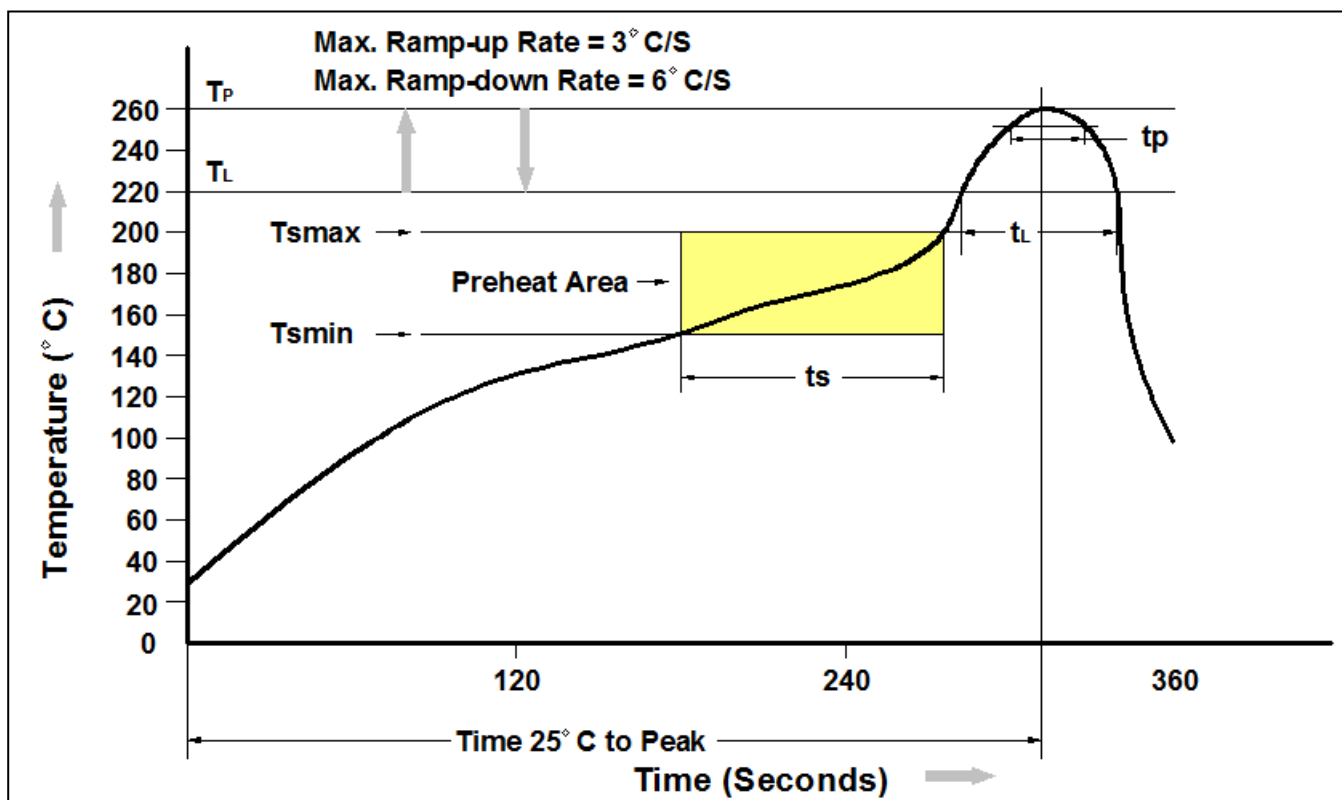

Profile Feature	Pb-Free Assembly Profile
Temperature Min. (Tsmin)	150 °C
Temperature Max. (Tsmax)	200 °C
Time (ts) from (Tsmin to Tsmax)	60-120 seconds
Ramp-up Rate (t <sub>L</sub> to t <sub>P</sub> )	3°C/second max.
Liquidous Temperature (T <sub>L</sub> )	217 °C
Time (t <sub>L</sub> ) Maintained Above (T <sub>L</sub> )	60 – 150 seconds
Peak Body Package Temperature	260 °C +0 °C / -5 °C
Time (t <sub>P</sub> ) within 5 °C of 260 °C	30 seconds
Ramp-down Rate (T <sub>P</sub> to T <sub>L</sub> )	6°C/second max
Time 25 °C to Peak Temperature	8 minutes max.



# H11L1, H11L2, H11L3

## Schmitt Trigger Output 6-Pin Optocoupler

---

### DISCLAIMER

CT MICRO RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. CT MICRO DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

---

DISCOLORATION MIGHT OCCUR ON THE PACKAGE SURFACE AFTER SOLDERING, REFLOW OR LONG TERM USE. THIS DOES NOT IMPACT THE PRODUCT PERFORMANCE NOR THE PRODUCT RELIABILITY.

---

CT MICRO ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT EXPRESS WRITTEN APPROVAL OF CT MICRO INTERNATIONAL CORPORATION.

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instruction for use provided in the labelling, can be reasonably expected to result in significant injury to the user.*
- 2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.*