

# LDW25-24

## 25W DIN Rail Switching Power Supply

LDW25-24 is a single or two phase AC or DC input DIN Rail Switching Power Supply.

Its compact size, high efficiency, excellent reliability together with easy installation due to pluggable connectors makes it market leader for various industrial telecom and renewable energy applications.

LDW25-24 is Class II isolation devices suitable for SELV and PELV circuitry and are designed to be mounted on DIN rail and installed inside a protective enclosure.



### Key Features & Benefits

- Single or two phase AC (90 - 550 VAC) or DC (150 - 725 VDC) input
- High efficiency and extremely compact size
- Plastic enclosure
- Class II (simplified wiring)
- Overload 130%
- Up to 70°C operating temperature with derating curve
- Ideal for applications with harsh mains conditions
- Compliant to renewable energy systems and high DC Bus
- RoHS Compliant

### Applications

- Industrial Control
- Communication
- Instrumentation Equipment
- Renewable

## 1. MODEL SELECTION

MODEL	INPUT VOLTAGE	# of PHASES	OUTPUT VOLTAGE	OUTPUT CURRENT	REDUNDANCY
LDW25-24	120 - 500 VAC (150 - 725 VDC)	1 / 2	24 VDC	1.0 A	No ORing diode

## 2. INPUT SPECIFICATIONS

Specifications are measured at 25°C, and 240 VAC / 50 Hz, typical unless otherwise stated.

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Input AC Voltage Range	Rated, single or two phase Operating	120 – 500 VAC 90 - 550 VAC
Input Frequency		47 - 63 Hz
Input DC Voltage Range	Rated	150 – 725 VDC
Input AC Current	Vin = 120 VAC / single phase Vin = 500 VAC / two phase	0.50 A 0.15 A
Input DC Current	Vin = 150 VAC / single phase Vin = 725 VAC / two phase	0.3 A < 0.1 A
Inrush Peak Current		< 20 A
Internal Protection Fuse	None, external fuse must be provided	
External Protection on AC Line	It is strongly recommended to provide external surge arresters (SPD) according to local regulations.	MCB 2A C curve

## 3. OUTPUT SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Output Power		25 W
Rated Voltage (Voltage Adjustment Range)		24 VDC (23 – 28 VDC)
Continuous Current		1.0 A
Overload Limit	Vin = 120 VAC / single phase Vin = 240 VAC / single phase Vin = 400 VAC / two phase Vin = 500 VAC / 2 two phase	1.35 A 1.50 A 1.35 A 1.30 A
Short Circuit Peak Current		4.5 A
Load Regulation		≤ 0.5%
Ripple & Noise		≤ 50 mVpp
Hold up Time	Vin = 240 VAC / single phase Vin = 500 VAC / two phase	> 35 ms > 180 ms
Efficiency		> 83%
Dissipated Power		< 4.9 W
Output Over Voltage Protection		> 33 VDC
Parallel Connection		Possible with external ORing diode
Protections	Hiccup at the overload limit with auto reset Over temperature Overvoltage	
Status Signals	Green LED = DC OK	

Note: Power rating, losses, efficiency, ripple, thermal behaviour may change outside of the nominal rated input range.

#### 4. ENVIRONMENTAL, EMC & SAFETY SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION	
Operating Temperature	Overtemperature protection (Start-up type tested: - 40°C <sup>1</sup> )	- 40 to + 70°C	
Derating	See Figure 1.		
Storage temperature		- 40 °C to + 80°C	
Humidity	Non-condensing	5 - 95% RH	
Life Time Expectancy	At 25 °C ambient full Load	179477 h (20.4 years)	
Overvoltage Category		III	
Pollution Degree		2 (IEC 664-1)	
Isolation Voltage	Input to Output	4.2 kVDC	
Safety Standards & Approvals	UL508 (reference) EN60950 (reference)		
EMC Standards	Emission	EN55022:2010 (CISPR22)	Class A
		EN55011:2009/A1:2010	Class A
	Immunity	EN61000-4-2:2008	Level 3
		EN61000-4-3:2006 /A2:2010	Level 3
		EN61000-4-4:2012	Level 3
	EN61000-4-5:2014	Level 4	
	EN61000-4-11:2004 /A1:2010	Level 2	
Protection Degree	EN60529:1989 / A:2013	IP20	
Vibration sinusoidal	IEC 60068-2-6:2007	5-17.8 Hz: ±1.6 mm; 17.8-500 Hz: 2g 2Hours / axis (X,Y,Z)	
Shock	IEC 60068-2-27:2008	30 g 6 ms, 20 g 11 ms; 3 bumps / direction, 18 bumps total	

<sup>1</sup> Possible at nominal voltage with load deration.


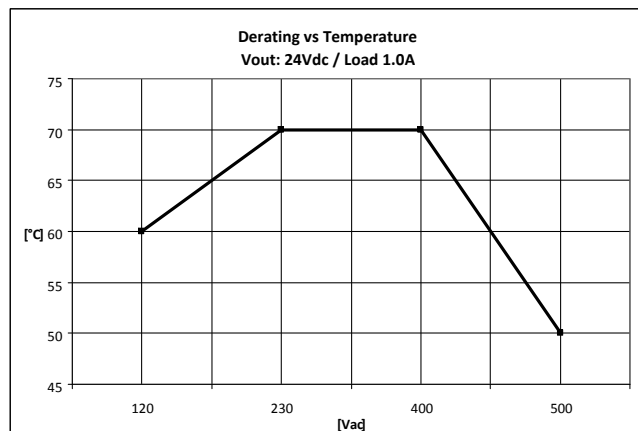


Figure 1. Output Derating

#### 5. MECHANICAL SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Weight		170 g
Dimensions (W x H x D)		40.0 x 115.0 x 110.0 mm
Mounting Rail		IEC 60715/H15/TH35-7.5(-15)
Connection Terminals	Screw type Header (24 - 12 AWG)	2.5 mm <sup>2</sup>
Case Material	Aluminum	

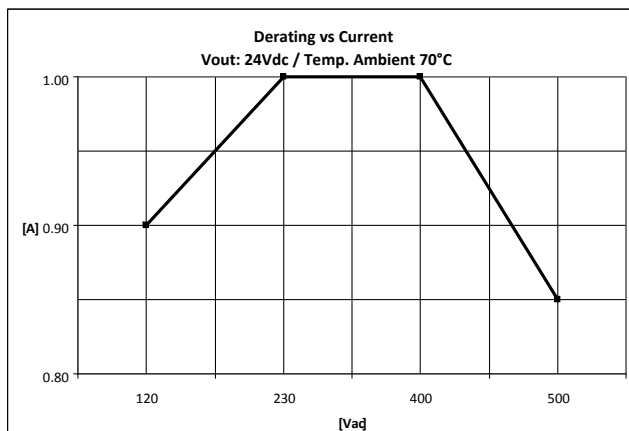

Asia-Pacific  
+86 755 298 85888

Europe, Middle East  
+353 61 225 977

North America  
+1 408 785 5200

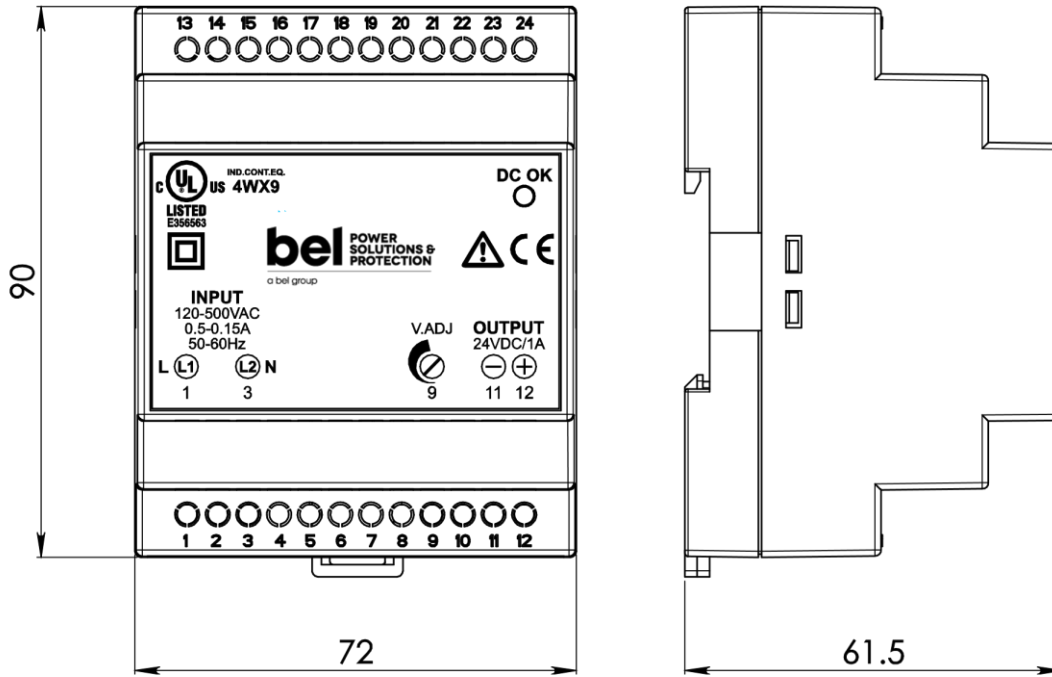


Figure 2. Mechanical Drawing

## 6. PIN LAYOUT & DESCRIPTION



INPUT CONNECTION	OUTPUT CONNECTION
Single phase: L = Line (1) N = Neutral (3)	+ = Positive DC (12) - = Negative DC (11)
2 phase: L1 = Phase 1 (1) L2 = Phase 2 (3)	
DC: L1(L) = + Positive DC (1) L2(N) = - Negative DC (3)	

For more information on these products consult: [tech.support@psbel.com](mailto:tech.support@psbel.com)

**NUCLEAR AND MEDICAL APPLICATIONS** - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

**TECHNICAL REVISIONS** - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.