

# GPTS3570

## PHASE CONTROLLED SCR

High reliability operation  
DC power supply

Controlled rectifiers  
DC drives - Motor starters

BLOCKING VOLTAGE UP TO	2800 V
AVERAGE CURRENT	5700 A
SURGE CURRENT	76 kA

### BLOCKING CHARACTERISTICS

Characteristic	Conditions	Value
VRMM	Repetitive peak reverse voltage	2800 V
VRSM	Non-repetitive peak reverse voltage	2900 V
VDRM	Repetitive peak off-state voltage	2800 V
IDRM	Repetitive peak off-state current, max.	VDRM, single phase, half wave, T <sub>j</sub> = T <sub>jmax</sub>
IRRM	Repetitive peak reverse current, max.	VRMM, single phase, half wave, T <sub>j</sub> = T <sub>jmax</sub>

### ON-STATE CHARACTERISTICS

I <sub>T(AV)</sub>	Average on-state current	Sine wave, 180° conduction, Th = 55 °C	5700 A
I <sub>T(RMS)</sub>	R.M.S. on-state current	Sine wave, 180° conduction, Th = 55 °C	8953 A
I <sub>TSM</sub>	Surge on-state current	Non rep. half sine wave, 50 Hz, VR = 0 V, T <sub>j</sub> = T <sub>jmax</sub>	76 kA
I <sup>2</sup> t	I <sup>2</sup> t for fusing coordination		28880 kA <sup>2</sup> s
V <sub>T(TO)</sub>	Threshold voltage	T <sub>j</sub> = T <sub>jmax</sub>	0.85 V
r <sub>T</sub>	On-state slope resistance	T <sub>j</sub> = T <sub>jmax</sub>	0.07 mΩ
V <sub>TM</sub>	Peak on-state voltage, max	On-state current I <sub>T</sub> = 8000 A, T <sub>j</sub> = T <sub>jmax</sub>	1.41 V
I <sub>H</sub>	Holding current, max	T <sub>j</sub> = 25 °C	400 mA
I <sub>L</sub>	Latching current, typ	T <sub>j</sub> = 25 °C	1500 mA

### TRIGGERING CHARACTERISTICS

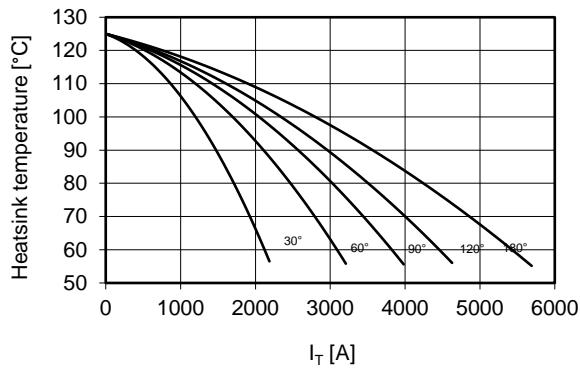
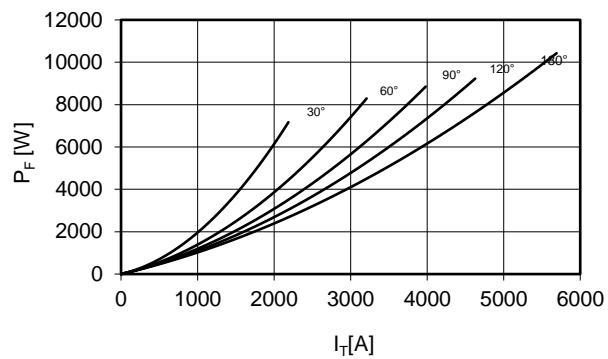
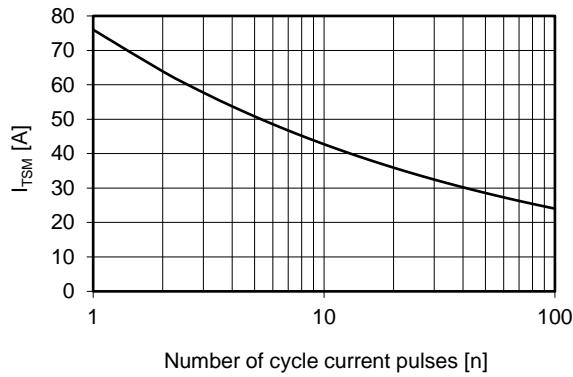
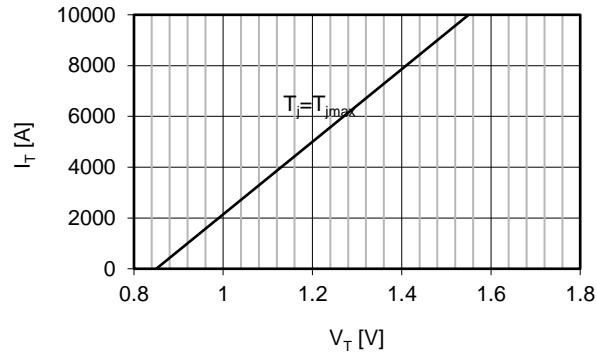
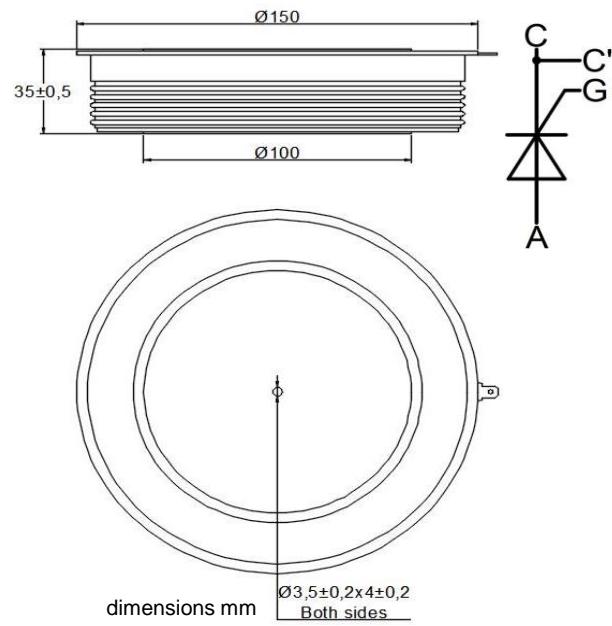
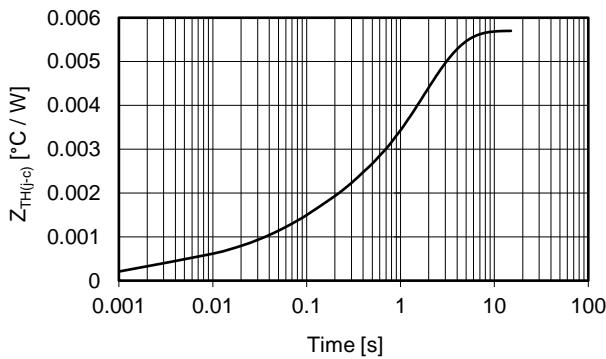
V <sub>GT</sub>	Gate trigger voltage	T <sub>j</sub> = 25 °C, V <sub>D</sub> = 12 V	3 V
I <sub>GT</sub>	Gate trigger current	T <sub>j</sub> = 25 °C, V <sub>D</sub> = 12 V	300 mA
V <sub>GD</sub>	Non-trigger voltage	V <sub>D</sub> = 67% VRMM, T <sub>j</sub> = T <sub>jmax</sub>	0.35 V
P <sub>GM</sub>	Peak gate power dissipation	Pulse width 0.5 ms	150 W
P <sub>GA(V)</sub>	Average gate power dissipation		5 W
I <sub>FGM</sub>	Peak gate current		12 A
V <sub>FGM</sub>	Peak gate voltage (forward)		30 V
V <sub>RGM</sub>	Peak gate voltage (reverse)		5 V

### SWITCHING CHARACTERISTICS

d <i>i</i> /dt	Critical rate of rise of on-state current	T <sub>j</sub> = T <sub>jmax</sub>	250 A/μs
dV/dt	Critical rate of rise of off-state voltage	T <sub>j</sub> = T <sub>jmax</sub>	1000 V/μs
t <sub>q</sub>	Turn-off time, typ	T <sub>j</sub> = T <sub>jmax</sub> , I <sub>T</sub> = 2000 A, d <i>i</i> /dt = -10 A/μs VR = 100 V, V <sub>D</sub> = 67% VDRM, dV/dt = 20 V/μs	500 μs

### THERMAL AND MECHANICAL CHARACTERISTICS

R <sub>th(j-c)</sub>	Thermal resistance (junction to case)	Double side cooled	0.0057 °C/W
R <sub>th(c-h)</sub>	Thermal resistance (case to heatsink)	Double side cooled	0.0010 °C/W
T <sub>jmax</sub>	Max operating junction temperature		125 °C
T <sub>stg</sub>	Storage temperature		-40 / 125 °C
F	Clamping force ± 10%		80 kN
	Mass		2700 g

**Current rating - sine wave**

**Power loss - sine wave**

**Maximum surge current  
d.s. cooled**

**On-state voltage drop**

**Thermal impedance (j-c)**


### Ordering information GPTS3570-VVGL

**VV:** blocking voltage / 100 (e.g. 28 for 2800 V)

**G:** trigger lead type (**S** = straight **T** = twisted **blank** = no leads)

**L:** trigger lead length x 100mm (**3 - 4 - 5 - 7** **blank** = no leads)

In the interest of product improvement Green Power Solutions reserves the right to change any specification given in this data sheet without notice.