



0 to 90 dB Dial Continuously Variable Attenuator, SMA Female To SMA Female Rated To 5 Watts Up To 4 GHz

TECHNICAL DATA SHEET

PE7422

**Configuration**

Design	Continuously Variable, Bidirectional Attenuator
Connector 1	SMA Female
Connector 2	SMA Female

**Electrical Specifications** Values at 25°C, sea level

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		4	GHz
Impedance		50		Ohms
Attenuation Value		0 to 90		dB
Step Type		Dial		
Input Power			5	Watts
Peak Power			500	Watts
Insertion Loss			5	dB

**Specifications by Frequency**

Description	F1	F2	F3	F4	F5	Units
Range	DC to 1,000	1 to 2	2 to 3	3 to 4		MHz
VSWR	1.5:1	1.6:1	1.7:1	1.8:1		

**Mechanical Specifications**

**Temperature**

Operating Range -55 to +125 deg C

**Size**

Length 2.38 in [60.45 mm]  
Width 4.52 in [114.81 mm]  
Height 4.52 in [114.81 mm]

**Connectors**

Description	Connector 1	Connector 2
Type	SMA Female	SMA Female
Connector Specification	MIL-STD-348	MIL-STD-348

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant





0 to 90 dB Dial Continuously Variable Attenuator, SMA  
Female To SMA Female Rated To 5 Watts Up To 4 GHz

TECHNICAL DATA SHEET


PE7422

**Plotted and Other Data**

Notes:

- Values at 25 °C, sea level
- Insertion loss is 3dB in the 30 dB range, 5 dB in other ranges.

**Outline Drawing**

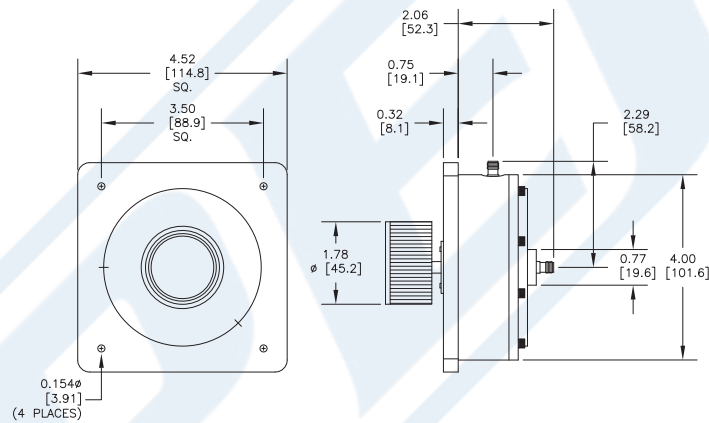

0 to 90 dB Dial Continuously Variable Attenuator, SMA Female To SMA Female Rated To 5 Watts Up To 4 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [0 to 90 dB Dial Continuously Variable Attenuator, SMA Female To SMA Female Rated To 5 Watts Up To 4 GHz PE7422](http://www.pasternack.com/90db-continuously-variable-sma-female-sma-female-5-watts-attenuator-pe7422-p.aspx)

URL: <http://www.pasternack.com/90db-continuously-variable-sma-female-sma-female-5-watts-attenuator-pe7422-p.aspx>

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [0 to 90 dB Dial Continuously Variable Attenuator, SMA Female To SMA Female Rated To 5 Watts Up To 4 GHz PE7422](http://www.pasternack.com/90db-continuously-variable-sma-female-sma-female-5-watts-attenuator-pe7422-p.aspx)