
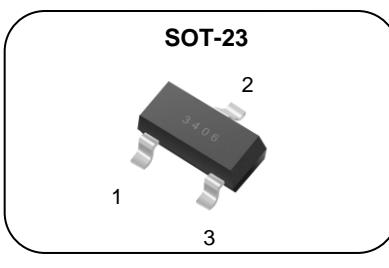


N-channel Enhanced mode SOT-23 MOSFET**Features**

- High ruggedness
- Low $R_{DS(ON)}$ (Typ 46mΩ)@ $V_{GS}=4.5V$
(Typ 34mΩ)@ $V_{GS}=10V$
- Low Gate Charge (Typ 8nC)
- Improved dv/dt Capability
- 100% Avalanche Tested
- Application:DC-DC Converter, Inverter, Synchronous Rectification



$BV_{DSS} : 30V$
 $I_D : 4A$
 $R_{DS(ON)} : 46m\Omega @ V_{GS}=4.5V$
 $34m\Omega @ V_{GS}=10V$

**General Description**

This power MOSFET is produced with advanced technology of SAMWIN.

This technology enable the power MOSFET to have better characteristics, including fast switching time, low on resistance, low gate charge and especially excellent avalanche characteristics.

**Order Codes**

Item	Sales Type	Marking	Package	Packaging
1	SW R 3406	3406	SOT-23	REEL

Absolute maximum ratings

Symbol	Parameter	Value	Unit
V_{DSS}	Drain to source voltage	30	V
I_D	Continuous drain current (@ $T_C=25^\circ C$)	4*	A
	Continuous drain current (@ $T_C=100^\circ C$)	2.5*	A
I_{DM}	Drain current pulsed (note 1)	16	A
V_{GS}	Gate to source voltage	± 20	V
E_{AS}	Single pulsed avalanche energy (note 2)	26	mJ
dv/dt	Peak diode recovery dv/dt (note 3)	5	V/ns
P_D	Total power dissipation (@ $T_C=25^\circ C$)	0.83	W
	Derating factor above 25°C	0.007	W/°C
T_{STG}, T_J	Operating junction temperature & storage temperature	-55 ~ + 150	°C

*. Drain current is limited by junction temperature.

Thermal characteristics

Symbol	Parameter	Value	Unit
R_{thja}	Thermal resistance, Junction to ambient (note)	151	°C/W

Note: R_{thja} is the sum of the junction-to-case and case-to-ambient thermal resistance where the case thermal reference is defined as the solder mounting surface of the drain pins. R_{thjc} is guaranteed by design while R_{thca} is determined by the user's board design. 151 °C/W on a 1 in² pad of 2oz copper.

Electrical characteristic ($T_C = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
Off characteristics						
BV_{DSS}	Drain to source breakdown voltage	$V_{\text{GS}}=0\text{V}, I_D=250\mu\text{A}$	30			V
$\Delta \text{BV}_{\text{DSS}} / \Delta T_J$	Breakdown voltage temperature coefficient	$I_D=250\mu\text{A}$, referenced to 25°C		0.02		$^\circ\text{C}$
I_{DSS}	Drain to source leakage current	$V_{\text{DS}}=30\text{V}, V_{\text{GS}}=0\text{V}$			1	μA
		$V_{\text{DS}}=24\text{V}, T_C=125^\circ\text{C}$			50	μA
I_{GSS}	Gate to source leakage current, forward	$V_{\text{GS}}=20\text{V}, V_{\text{DS}}=0\text{V}$			100	nA
	Gate to source leakage current, reverse	$V_{\text{GS}}=-20\text{V}, V_{\text{DS}}=0\text{V}$			-100	nA
On characteristics						
$V_{\text{GS}(\text{TH})}$	Gate threshold voltage	$V_{\text{DS}}=V_{\text{GS}}, I_D=250\mu\text{A}$	1		3	V
$R_{\text{DS}(\text{ON})}$	Drain to source on state resistance	$V_{\text{GS}}=4.5\text{V}, I_D=3.5\text{A}$		46	57	$\text{m}\Omega$
		$V_{\text{GS}}=10\text{V}, I_D=4\text{A}$		34	42	$\text{m}\Omega$
G_{fs}	Forward transconductance	$V_{\text{DS}}=5\text{V}, I_D=3\text{A}$		8.6		S
Dynamic characteristics						
C_{iss}	Input capacitance	$V_{\text{GS}}=0\text{V}, V_{\text{DS}}=10\text{V}, f=1\text{MHz}$		344		pF
C_{oss}	Output capacitance			62		
C_{rss}	Reverse transfer capacitance			44		
$t_{\text{d}(\text{on})}$	Turn on delay time	$V_{\text{DS}}=15\text{V}, I_D=4\text{A}, R_G=25\Omega, V_{\text{GS}}=10\text{V}$ (note 4,5)		4		ns
t_r	Rising time			29		
$t_{\text{d}(\text{off})}$	Turn off delay time			27		
t_f	Fall time			15		
Q_g	Total gate charge	$V_{\text{DS}}=24\text{V}, V_{\text{GS}}=10\text{V}, I_D=4\text{A}$ (note 4,5)		8		nC
Q_{gs}	Gate-source charge			1		
Q_{gd}	Gate-drain charge			2		
R_g	Gate resistance	$V_{\text{DS}}=0\text{V}$, Scan F mode		1.3		Ω

Source to drain diode ratings characteristics

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
I_s	Continuous source current	Integral reverse p-n Junction diode in the MOSFET			4	A
I_{SM}	Pulsed source current				16	A
V_{SD}	Diode forward voltage drop.	$I_s=4\text{A}, V_{\text{GS}}=0\text{V}$			1.4	V

*. Notes

- Repetitive rating : pulse width limited by junction temperature.
- $L=13\text{mH}, I_{\text{AS}}=2\text{A}, V_{\text{DD}}=15\text{V}, R_G=25\Omega$, Starting $T_J=25^\circ\text{C}$
- Pulse Test : Pulse Width $\leq 300\text{us}$, duty cycle $\leq 2\%$.
- Essentially independent of operating temperature.

Fig. 1. On-state characteristics

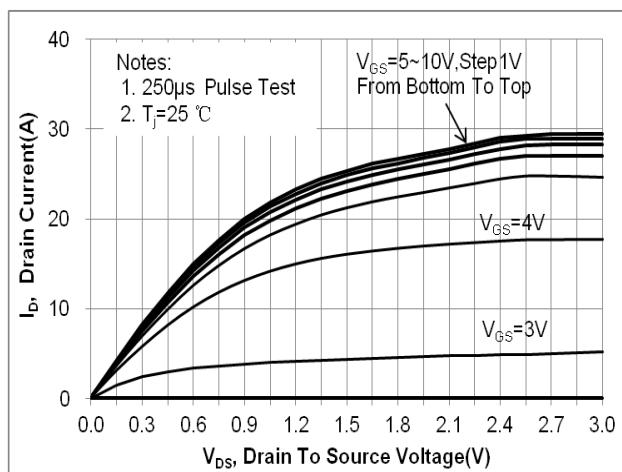


Fig. 2. On-resistance variation vs. drain current and gate voltage

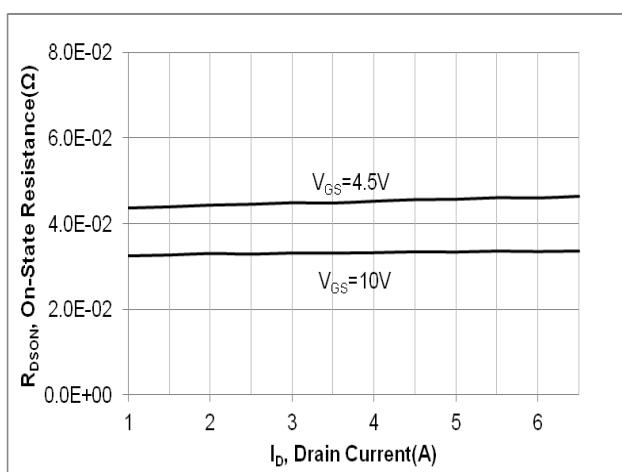


Fig. 3. Gate charge characteristics

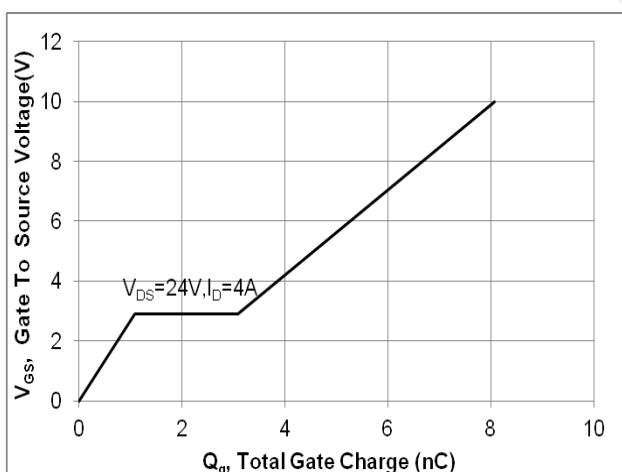


Fig. 4. On-state current vs. diode forward voltage

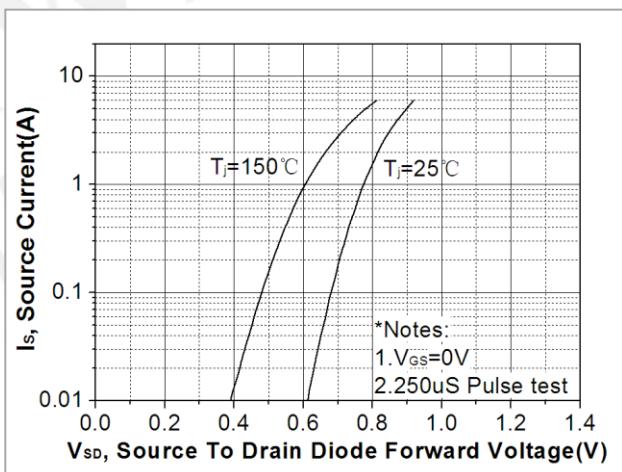


Fig. 5. Breakdown voltage variation vs. junction temperature

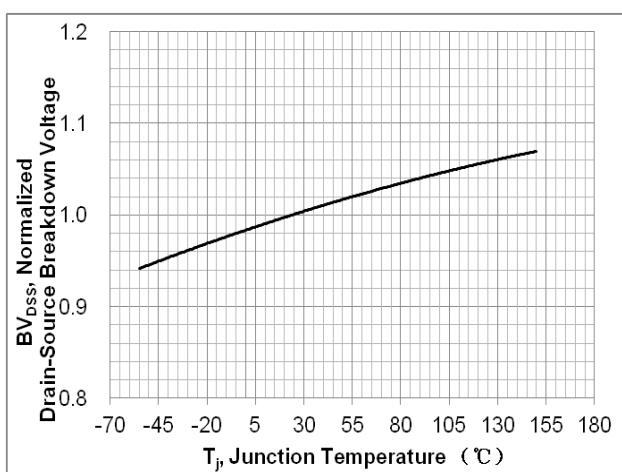


Fig. 6. On-resistance variation vs. junction temperature

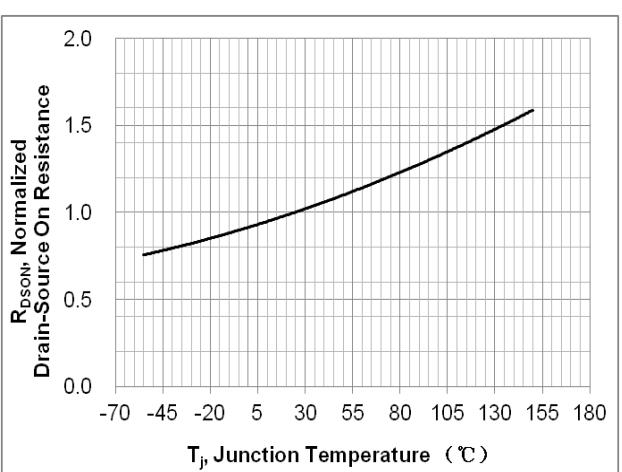


Fig. 7. Maximum safe operating area

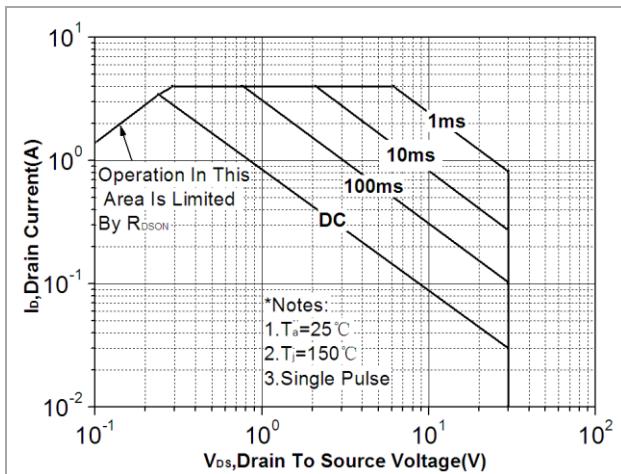


Fig. 8. Capacitance Characteristics

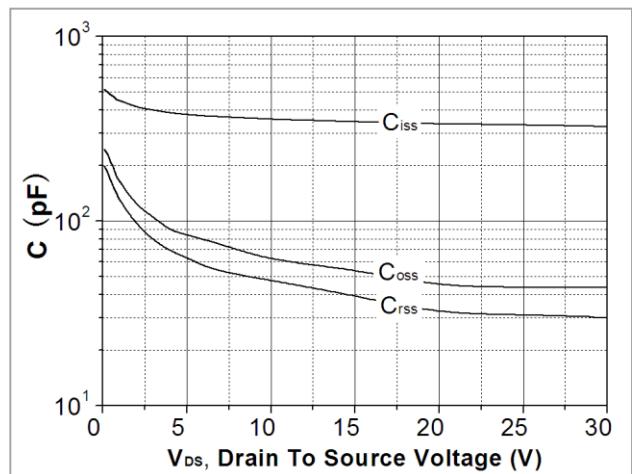


Fig. 9. Transient thermal response curve

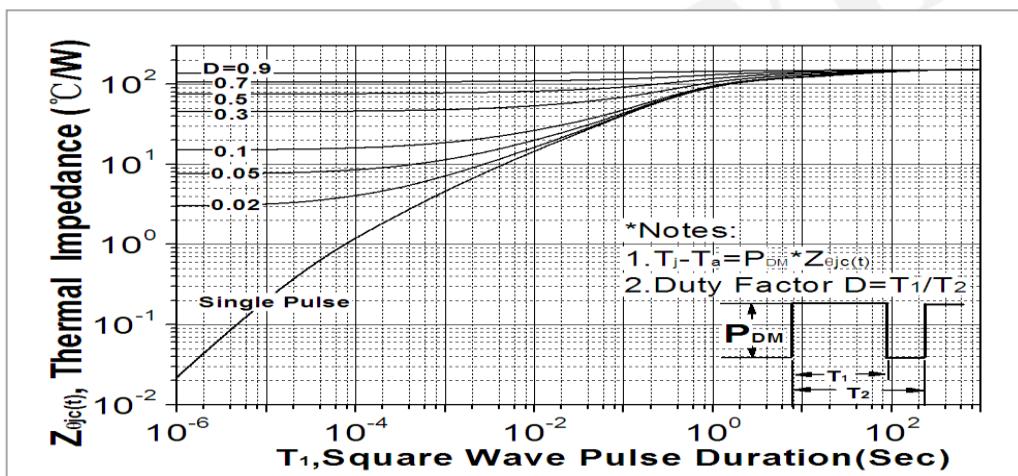


Fig. 10. Gate charge test circuit & waveform

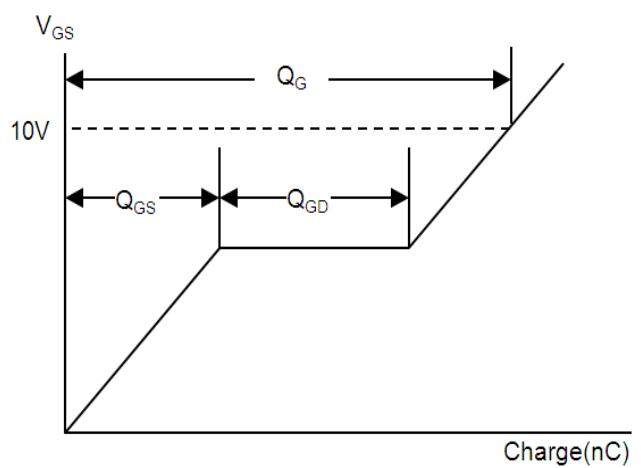
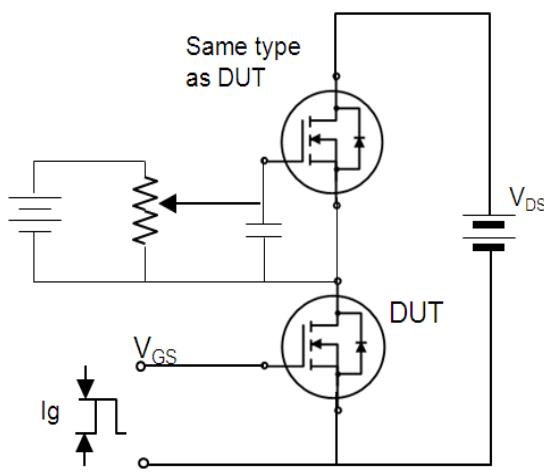


Fig. 11. Switching time test circuit & waveform

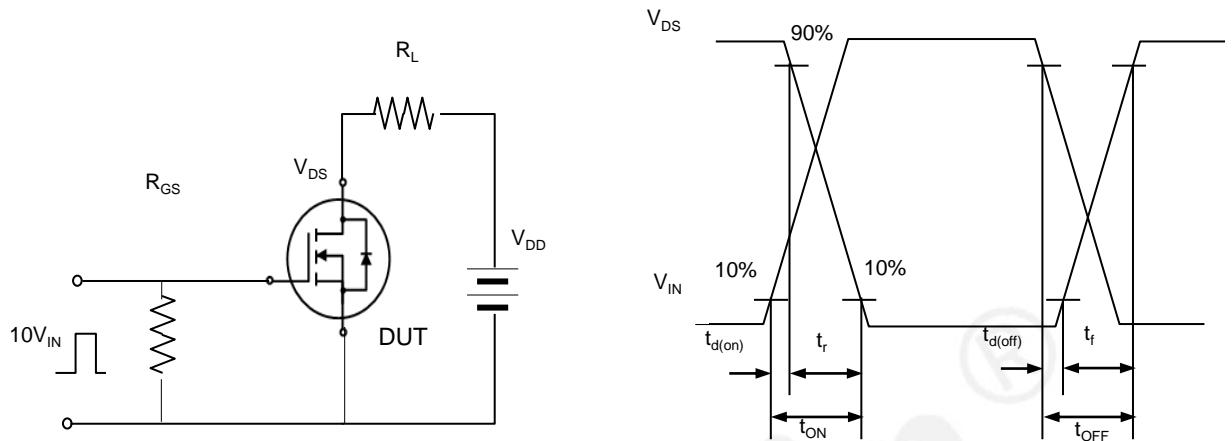


Fig. 12. Unclamped Inductive switching test circuit & waveform


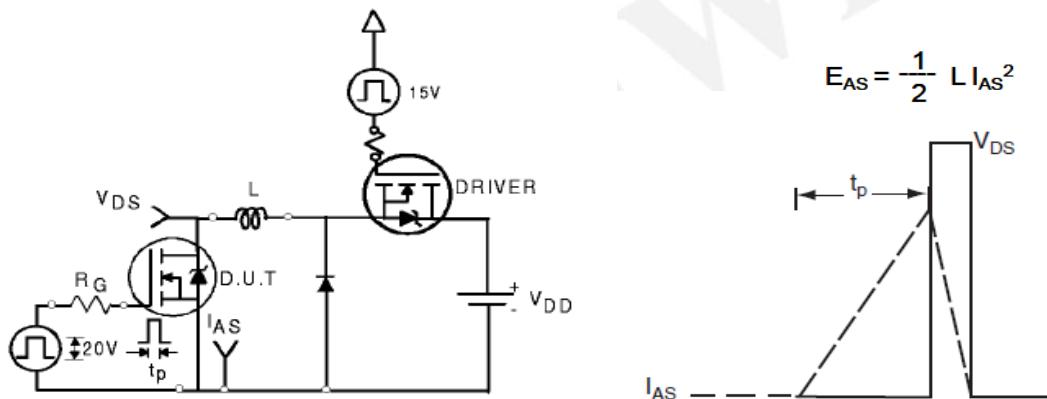


Fig. 13. Peak diode recovery dv/dt test circuit & waveform

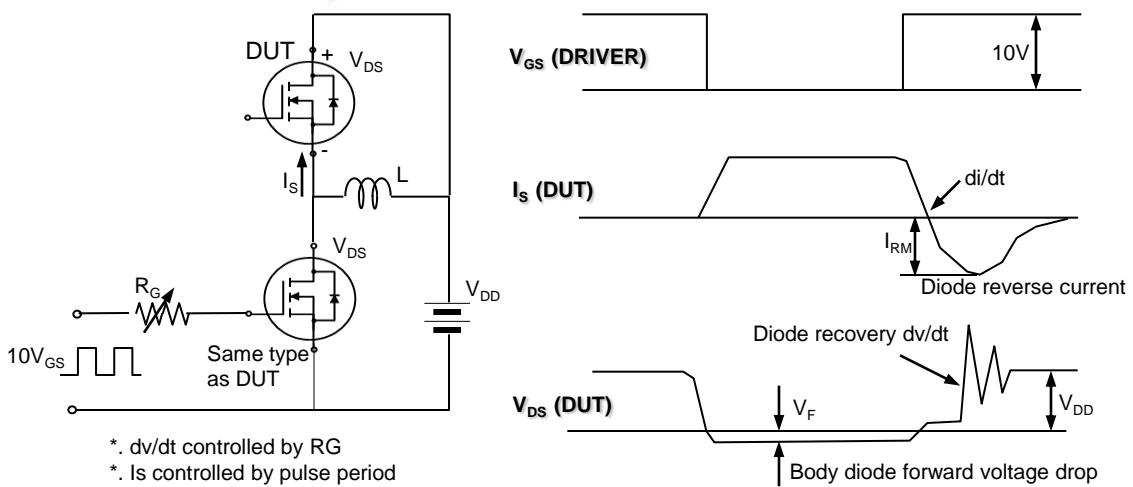

Samwin®
内部保密

DISCLAIMER

- * All the data & curve in this document was tested in XI'AN SEMIPOWER TESTING & APPLICATION CENTER.
- * This product has passed the PCT,TC,HTRB,HTGB,HAST,PC and Solderdunk reliability testing.
- * Qualification standards can also be found on the Web site (<http://www.semipower.com.cn>) 
- * Suggestions for improvement are appreciated, Please send your suggestions to samwin@samwinsemi.com