

June 2015

# Multilayer Low Pass Filter

For 470-770MHz

# DEA160710LT-5023B1

1.6x0.8mm [EIA 0603]\*

\* Dimensions Code JIS[EIA]




### **Multilayer Low Pass Filter**

For 470-770MHz


### Conformity to RoHS Directive

## **DEA160710LT-5023B1**

### SHAPES AND DIMENSIONS








1	IN	
2	GND	
3	OUT	
4	GND	

### ■ RECOMMENDED LAND PATTERN



OROHS Directive Compliant Product: See the following for more details related to RoHS Directive compliant products. http://product.tdk.com/en/environment/rohs/

<sup>•</sup> All specifications are subject to change without notice.

<sup>•</sup> Before using these products, be sure to request the delivery specifications.



### DEA160710LT-5023B1

### **ELECTRICAL CHARACTERISTICS**

Item	Frequency Range (MHz)	Min.	Тур.	Max.
	470 to 600	_	0.76	1.0
Insertion Loss (dB)	600 to 710	_	1.49	2.0
	710 to 770	_	3.09	4.0
Return Loss (dB)	470 to 710	11.73	13.6	_
Heluiii Loss (ub)	710 to 770	7.36	11.0	_
	880 to 915	25	33.4	_
	940 to 960	25	29.9	_
Attenuation (dB)	1429 to 1453	27	33.6	_
	1920 to 1980	26	30.7	_
	2400 to 2500	26	33.0	_
Characteristic Impedance ( $\Omega$ ) 50 (Nominal)				

<sup>·</sup> Ta: +25±5°C

### **TEMPERATURE RANGE**

Operating temperature	Storage temperature		
(°C)	(°C)		
-40 to +85	-40 to +85		


All specifications are subject to change without notice.Before using these products, be sure to request the delivery specifications.




### DEA160710LT-5023B1

### **■ FREQUENCY CHARACTERISTICS**


### □INSERTION LOSS



### **ATTENUATION**



#### **RETURN LOSS**




<sup>•</sup> All specifications are subject to change without notice.

<sup>•</sup> Before using these products, be sure to request the delivery specifications.



### DEA160710LT-5023B1

### ■ RECOMMENDED REFLOW PROFILE

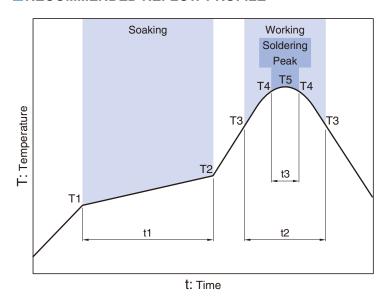

Soaking			Working		Soldering Peak	Soldering Peak		
Temp.		Time	Temp.	Time	Temp.	Time	Temp.	
T1	T2	t1	Т3	t2	T4	t3	T5	
150°C	180°C	60 to 120s	230°C	more than 30s	247 to 253°C	within 10s	260°C max.	

All specifications are subject to change without notice.Before using these products, be sure to request the delivery specifications.



### REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

### SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

### **⚠** REMINDERS

The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.

Please understand that we are not responsible for any damage or liability caused by use of the products in any of the applications below or for any other use exceeding the range or conditions set forth in this catalog.

- (1) Aerospace/Aviation equipment
- (2) Transportation equipment (cars, electric trains, ships, etc.)
- (3) Medical equipment
- (4) Power-generation control equipment
- (5) Atomic energy-related equipment
- (6) Seabed equipment
- (7) Transportation control equipment

- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When using this product in general-purpose applications, you are kindly requested to take into consideration securing protection circuit/ equipment or providing backup circuits, etc., to ensure higher safety.

<sup>•</sup> All specifications are subject to change without notice.

<sup>•</sup> Before using these products, be sure to request the delivery specifications.