


F2139BA Series



9x14 mm FR-4, 3.3 Volt, PECL, Clock Oscillator



- Former **Champion** TECHNOLOGIES, INC. Product
- Clock Recovery, Optic Transmission Equipment, Digital Cross Connect Equipment

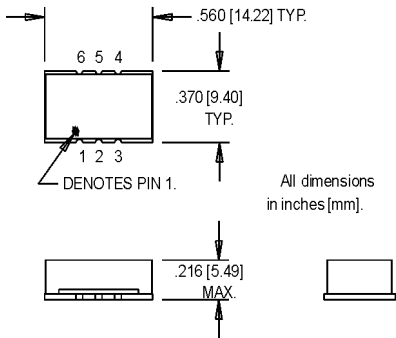

SUGGESTED SOLDER PAD LAYOUT



Pin Connections

PIN	FUNCTION
1	N/C or E/D
2	N/C
3	Vss/Ground
4	Output Q
5	Output \bar{Q}
6	+Vcc

Ordering Information

	F2139BA	X	X	X	-R	00.0000
Package						MHz
Stability						
Blank:	±20 ppm (0°C to +70°C only)					
B:	±50 ppm					
Temperature Range						
Blank:	0°C to +70°C					
M:	-40°C to +85°C					
Enable/Disable Function						
Blank:	N/C on Pin 1					
E:	Enable/Disable on Pin 1					
RoHS Compliance						
Blank:	non-RoHS compliant part					
-R:	RoHS compliant part					
Frequency (customer specified)						

PARAMETER	Symbol	Min.	Typ.	Max.	Units	Condition/Notes	
Frequency Range	F	70		200	MHz		
Operating Temperature	T _A	(See Ordering Information)					
Storage Temperature	T _s	-40		+85	°C		
Frequency Stability	ΔF/F	(See Ordering Information)					See Note 1
Aging							
1st Year			±2		ppm		
Thereafter (per year)			±1		ppm		
Input Voltage	V _{cc}	3.135	3.3	3.465	V		
Input Current	I _{cc}			70	mA		
Output Type						PECL	
Load		50 Ω to (V _{cc} - 2V) or Thevenin equivalent					
Symmetry (Duty Cycle)		45		55	%	(V _{cc} - 1.3) ref. level	
Output Skew				100	ps	50%	
Logic "1" Level	V _{oh}	V _{cc} -1.02		V _{cc} -0.72	V	50Ω into (V _{cc} -2) load	
Logic "0" Level	V _{ol}	V _{cc} -1.95		V _{cc} -1.60	V	50Ω into (V _{cc} -2) load	
Rise Time	T _r			450	ps	20% to 80%	
Fall Time	T _f			450	ps	80% to 20%	
Enable Function		PECL low: output active PECL high: output disables					
Start up Time				10	ms		
Random Jitter	R _j		5	12	ps RMS	1-Sigma	

1. Inclusive of calibration, temperature, voltage, load and 10 years aging.

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.

Please see www.mtronpti.com for our complete offering and detailed datasheets. Contact us for your application specific requirements: MtronPTI 1-800-762-8800.