

# rakon

## Low Noise Oscillator series

### LNO 3200 B3      OCSO @ 3200 MHz

Specific request can be addressed to RAKON [hirel@rakon.fr](mailto:hirel@rakon.fr)

#### Product Description

LNO 3200 B3 is a low noise oscillator generating an output signal at 3200 MHz.

It is composed by an OCSO (Oven Controlled SAW Oscillator) at 320 MHz fundamental frequency, followed by a frequency multiplier x10. It can optionally include a PLL to be phase locked on an external 10MHz reference.

LNO 3200 B3 is designed for routine environment (test equipment, shelter, ground based military equipment ...). It is available in a 120.7mm x 76.2mm x 23.3mm package.



#### Features

Excellent phase noise performance (typical values) :

- -130 dBc/Hz @ 1 kHz offset
- -154 dBc/Hz @ 10 kHz offset
- -157 dBc/Hz noise floor



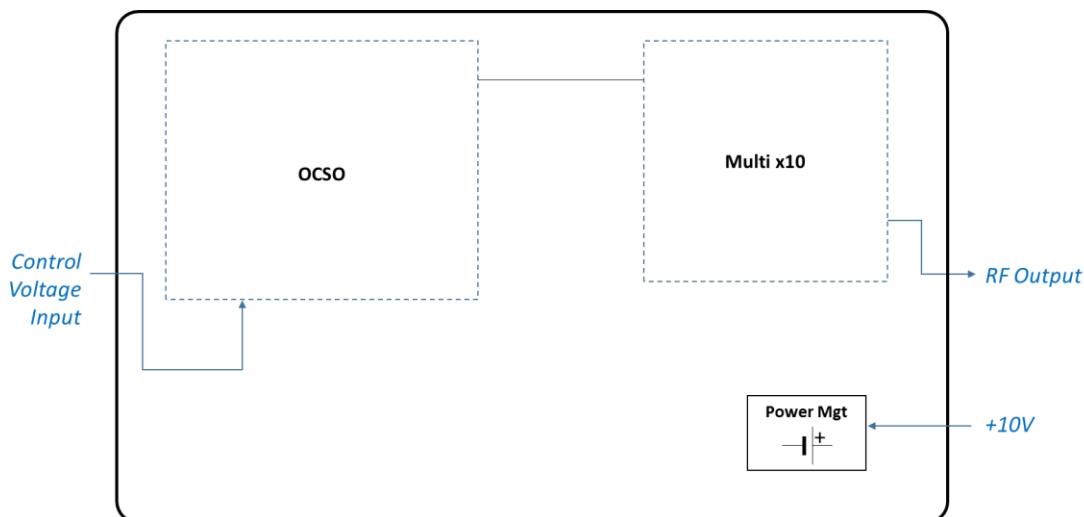
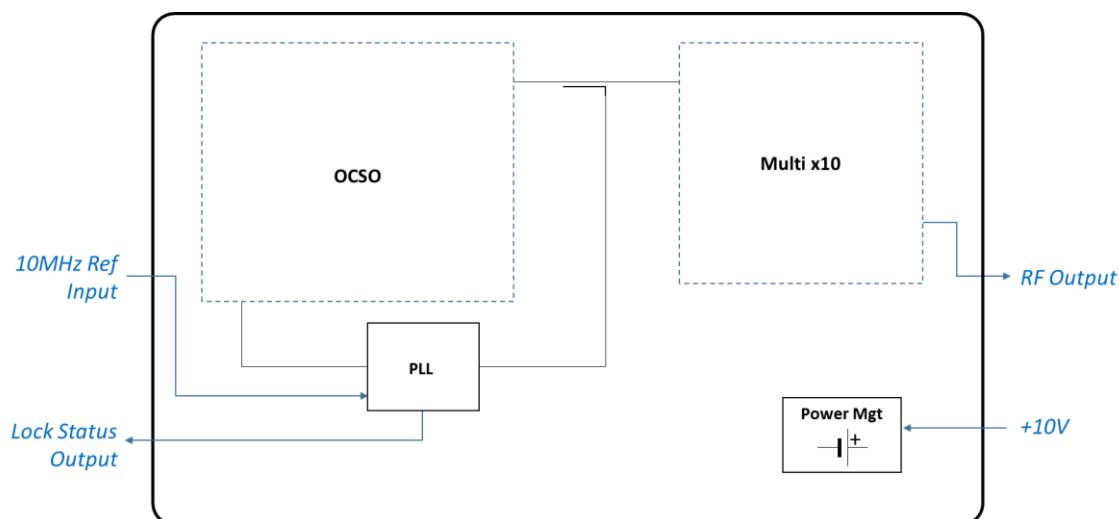
#### Applications

- Instrumentation (test equipment, simulator)
- Ground based military equipment as per MIL-PRF-28800F, Class 3
- Clock for high speed ADC

**Technical Description**

LNO 3200 B3 is available in two different versions :

- Standard version : in this case, it is a VC-OCSO (Voltage Controlled, Oven Controlled SAW Oscillator) that can be used either in free run mode, or controlled by an external DC voltage.
- PLL version : in this case, the unit needs an external 10 MHz reference to operate, and the output signal is phase-locked to this reference.

**Standard version block diagram****PLL version block diagram**

## Specifications

### 1.0 Environmental conditions

Line	Parameter	Test Condition	Min	Max	Unit
<b>1.1</b>	Operating temperature range		0	+50	°C
<b>1.2</b>	Storage temperature range		-40	+85	°C
<b>1.3</b>	Shock	As per MIL-PRF-28800F, Class 3, test equipment			
<b>1.4</b>	Random vibration	As per MIL-PRF-28800F, Class 3, test equipment			

### 2.0 Electrical interface

Line	Parameter	Test Condition	Operating Range	Absolute Maximum	Unit
<b>2.1</b>	Supply voltage	Pin 2	+10 ± 0.2	0 to +15	VDC
<b>2.2</b>	Load impedance	Pin 3, 50Ω all phases	< 1.3:1	-	VSWR
<i>Standard version</i>					
<b>2.3</b>	Control input voltage	Pin 1	+2 to +8	-0.3 to +10	VDC
<b>2.4</b>	Control input impedance	Pin 1	> 10	-	kΩ
<i>PLL version</i>					
<b>2.5</b>	Reference input frequency	Pin 1	10 ± 0.00001	-	MHz
<b>2.6</b>	Reference input level	Pin 1, sine wave, 50 Ω source and load	+5 to +10	< +12	dBm
<b>2.7</b>	Lock status	Pin 4	Open drain		

### 3.0 Performances

Line	Parameter	Test Condition	Typ. Value	Guaranteed	Unit
<b>3.1</b>	Nominal output frequency	Definition	3200		MHz
<b>3.2</b>	Output power	Sine wave into 50 Ω load	-	+5 ± 2	dBm
<b>3.3</b>	Output impedance	At 3200 MHz	-	< 2.0:1	VSWR
<i>Standard version</i>					
<b>3.4</b>	Output frequency calibration	Factory calibration @25°C, no control input (free run)	±0.2	< ±0.5	ppm
<b>3.5</b>	Output frequency stability	All causes (temperature and load)	-	< ±2	ppm
<b>3.6</b>	Long term stability	After 30 days of continuous operation 1 <sup>st</sup> year 10 years	- -	< ±1 < ±6	ppm ppm
<b>3.7</b>	Frequency tuning	For full control input operating range	±6	> ±4	ppm
<b>3.8</b>	Tuning slope	Positive	2	1.5 to 3	ppm/V

<b>3.9</b>	Steady state power consumption	@25 °C (calm air)	4.5	< 6	W
<b>3.10</b>	Warm-up power consumption		9	< 9.5	W
<b>3.11</b>	Warm-up time	±1 ppm with reference to frequency reached after 1 hour of continuous operation	-	< 5	minutes

**PLL version**

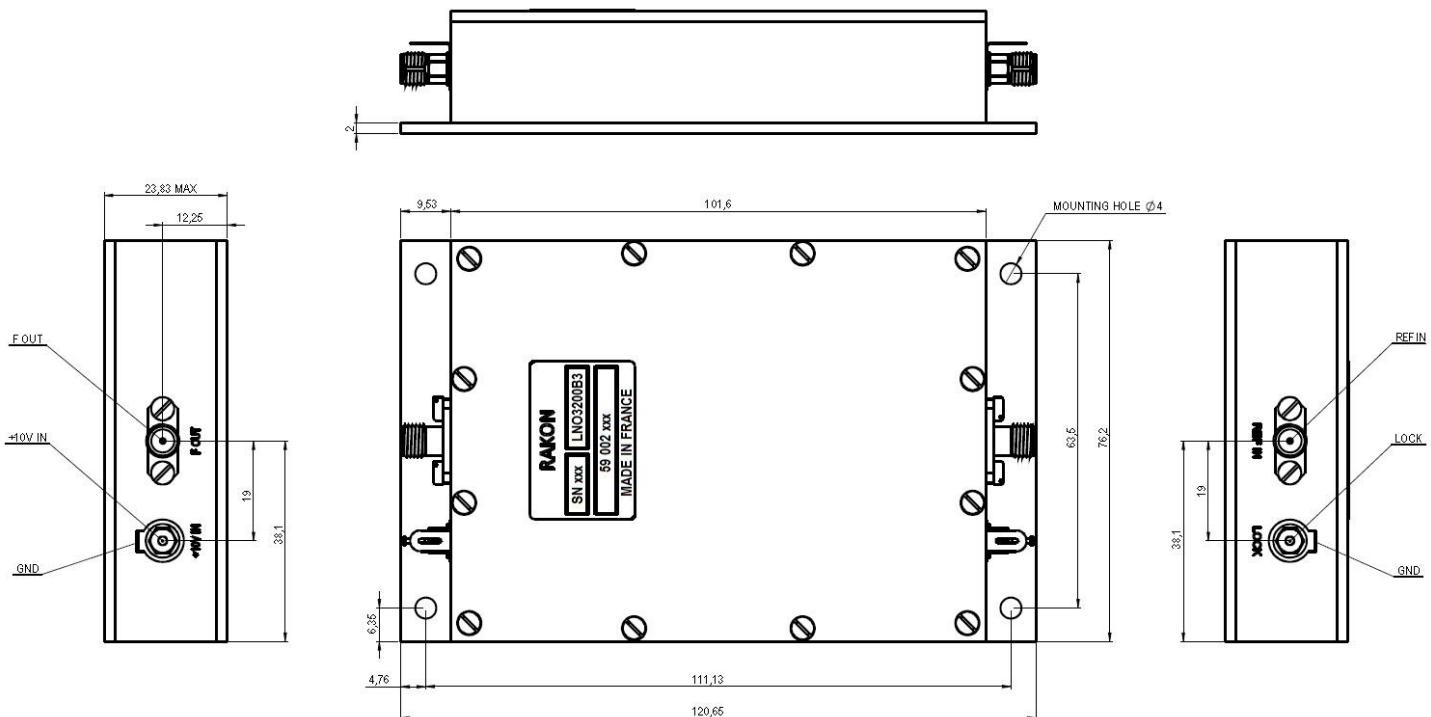
<b>3.12</b>	Loop bandwidth	Internal	40	< 50	Hz
<b>3.13</b>	Steady state power consumption	@25 °C (calm air)	5	< 6.5	W
<b>3.14</b>	Warm-up power consumption		9.5	< 10	W
<b>3.15</b>	Warm-up time	Lock status ON	-	< 2	minutes

#### 4.0 Single side band phase noise (PN) and time jitter

Line	Parameter	Test Condition	Typ. Value	Guaranteed	Unit
<b>4.1</b>	PN power density @ 1 kHz offset	Static conditions, at 25°C (guaranteed values on full temperature range)	-130	< -127	dBc/Hz
<b>4.2</b>	PN power density @ 10 kHz offset		-154	< -151	dBc/Hz
<b>4.3</b>	PN power density @ 1 MHz offset		-157	< -154	dBc/Hz
<b>4.4</b>	Harmonic distortion	Sub-harmonics, 2 <sup>nd</sup> and 3 <sup>rd</sup> harmonics	-50	< -40	dBc
<b>4.5</b>	Spurious	Other than harmonic distortion	-90	< -80	dBc
<b>4.6</b>	Full offset range jitter	From 10 Hz to 100 MHz	150	< 200	fs
<b>4.7</b>	Broadband jitter	From 10 kHz to 40 MHz	5	< 10	fs

## 5.0 Mechanical features

Outline in mm, nominal values (general tolerances :  $\pm 0.15\text{mm}$ ).



## 6.0 Pin description

Line	Name	Type	Description
6.1	REF IN	SMA jack	<u>Standard version</u> : DC control voltage input <u>PLL version</u> : 10 MHz reference input
6.2	F OUT	SMA jack	3200 MHz output signal
6.3	+10V IN	Feed-thru	Power supply (+)
6.4	GND	Lug	Mechanical and electrical ground (-)
6.5	LOCK	Feed-thru	<u>Standard version</u> : not used <u>PLL version</u> : Lock status Lock OFF -> '0' Lock ON -> 'HiZ', pull-up limited to 3.6V
6.6	GND	Lug	Mechanical and electrical ground (-)