

6

5

4

3

2

1

MATERIAL AND FINISH:

Insulator: Impact resistance Polypropylene, UL 94V-HB rated, color black






Contacts & terminals:

PDSN-24-4C (solder lugs): Brass, Nickel plated
Contacts: Spring steel, Nickel plated imbedded in Polypropylene

MECHANICAL SPECIFICATIONS:

Operating temperature: -5°C to +83°C

RoHS
COMPLIANT

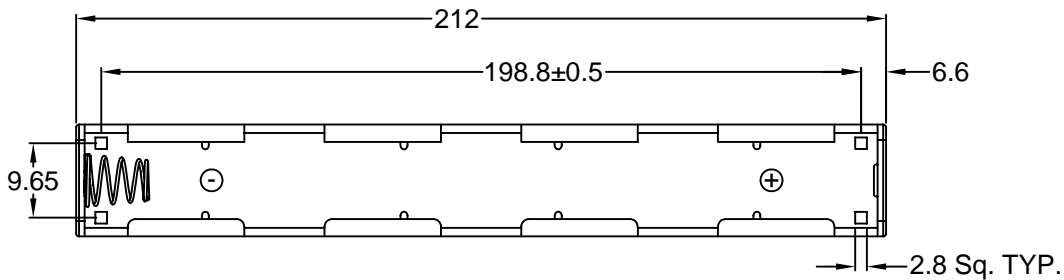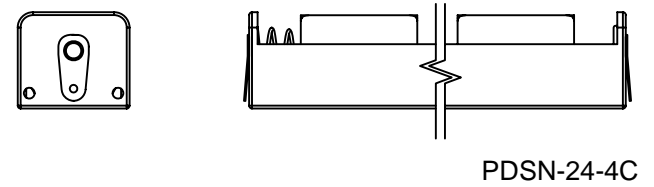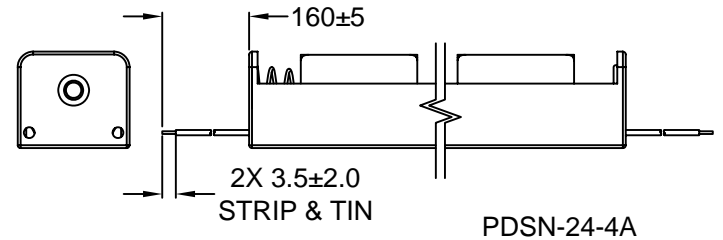

REV	DATE	CHANGE	CHKG	CHKD	APPR

TOLERANCE UNLESS OTHERWISE SPECIFIED	
X	± 1
X.X	± 0.4
X.XX	± 0.20

Power Dynamics, Inc.
Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 4X C SIZE BATTERY HOLDER

DRAWN BY	TD	DATE:	11/20/01
CHECK BY	PB	DATE:	11/20/01
APPR BY		DATE:	

PART #: PDSN-24-4X		SHEET 1 of 1
SIZE: A	ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS	REV:
SCALE: NTS		

6

5

4

3

2

1