



60 Volts, 10 Amp Dual Schottky Common Cathode Center Tap Rectifier

Qualified per MIL-PRF-19500/680

*Qualified Levels:
JAN, JANTX, and
JANTXV*

DESCRIPTION

This low-profile 1N6842U3 Schottky rectifier device is military qualified up to a JANTXV level for high-reliability applications.

Important: For the latest information, visit our website <http://www.microsemi.com>.

FEATURES

- Surface mount equivalent of JEDEC registered 1N6842
- Low profile ceramic SMD
- Hermetically sealed package
- Ultrasonic aluminum wire bonds
- Low capacitance
- JAN, JANTX, JANTXV qualifications available per MIL-PRF-19500/680
- RoHS compliant by design


APPLICATIONS / BENEFITS

- High surge rating
- Low reverse leakage current
- Low forward voltage
- Seam welded package

MAXIMUM RATINGS @ T_C = +25 °C unless otherwise noted

| Parameters/Test Conditions | Symbol | Value | Unit |
|--|-------------------------------------|-------------|------|
| Junction and Storage Temperature | T _J and T _{STG} | -65 to +150 | °C |
| Thermal Resistance Junction-to-Case (on each leg) | R _{θJC} | 2.8 | °C/W |
| Working Peak Reverse Voltage | V _{RWM} | 60 | V |
| Average Rectified Output Current @ T _C = +100 °C per leg ⁽¹⁾ | I _O | 10 | A |
| Surge Peak Forward Current @ tp = 8.3 ms half-sine wave | I _{FSM} | 200 | A |

Note: 1. Derate linearly at 200 mA/°C from T_C = +100 °C to +150 °C.

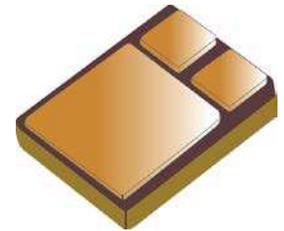

**U3 (SMD-0.5)
Package**

MSC – Lawrence

6 Lake Street,
Lawrence, MA 01841
Tel: 1-800-446-1158 or
(978) 620-2600
Fax: (978) 689-0803

MSC – Ireland


Gort Road Business Park,
Ennis, Co. Clare, Ireland
Tel: +353 (0) 65 6840044
Fax: +353 (0) 65 6822298

Website:

www.microsemi.com

MECHANICAL and PACKAGING

- CASE: Ceramic and gold over nickel plated steel.
- TERMINALS: Gold over nickel plated tungsten/copper.
- MARKING: Part number, date code, A = anode
- POLARITY: See [schematic](#) on last page
- WEIGHT: Approximately 0.9 grams
- See [Package Dimensions](#) on last page.

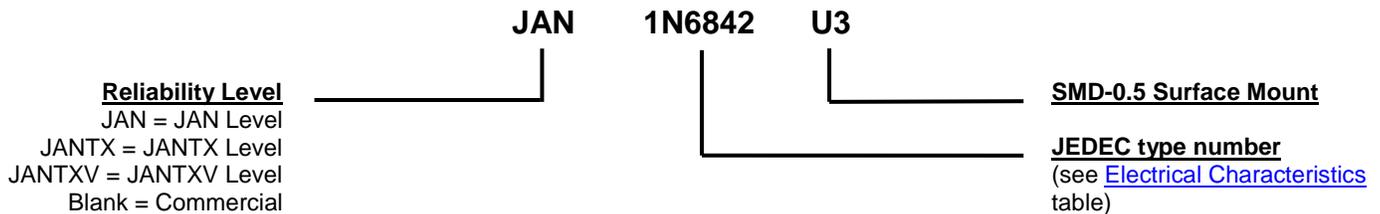PART NOMENCLATURE

SYMBOLS & DEFINITIONS

| Symbol | Definition |
|-----------|--|
| C | Capacitance: The capacitance in pF at a frequency of 1 MHz and specified voltage. |
| f | frequency |
| I_F | Forward Current: The dc current flowing from the external circuit into the anode terminal. |
| I_{FSM} | Surge Peak Forward Current: The forward current including all nonrepetitive transient currents but excluding all repetitive transients (ref JESD282-B) |
| I_R | Reverse Current: The dc current flowing from the external circuit into the cathode terminal at the specified voltage V_R . |
| V_F | Forward Voltage: A positive dc anode-cathode voltage the device will exhibit at a specified forward current. |
| V_R | Reverse Voltage: A positive dc cathode-anode voltage below the breakdown region. |
| V_{RWM} | Working Peak Reverse Voltage: The peak voltage excluding all transient voltages (ref JESD282-B). Also sometimes known historically as PIV. |

ELECTRICAL CHARACTERISTICS @ $T_A = +25^\circ\text{C}$ unless otherwise noted

| Parameters / Test Conditions | Symbol | Min. | Max. | Unit |
|--|--------|------|----------|---------------------|
| CHARACTERISTICS per Leg | | | | |
| Forward Voltage* | V_F | | | V |
| $I_F = 3\text{ A}, 300\ \mu\text{s Pulse}$ | | | 0.62 | |
| $I_F = 10\text{ A}, 300\ \mu\text{s Pulse}$ | | | 0.78 | |
| $I_F = 15\text{ A}, 300\ \mu\text{s Pulse}$ | | | 0.90 | |
| $I_F = 10\text{ A}, T_A = +100^\circ\text{C}, 300\ \mu\text{s Pulse}$ | | | 0.70 | |
| $I_F = 15\text{ A}, T_A = +100^\circ\text{C}, 300\ \mu\text{s Pulse}$ | | | 0.80 | |
| Reverse Current | I_R | | | |
| $V_R = 60\text{ V}$ $V_R = 60\text{ V}, T_A = +100^\circ\text{C}$ | | | 50 10 | μA mA |
| Junction Capacitance | C | | | |
| $V_R = 5\text{ V}$ $f = 1\text{ MHz}, V_{SIG} = 50\text{ mV (p-p) (max)}$ | | | 400 | pF |

* Pulse test: Pulse width 300 μsec , duty cycle 2%

GRAPHS

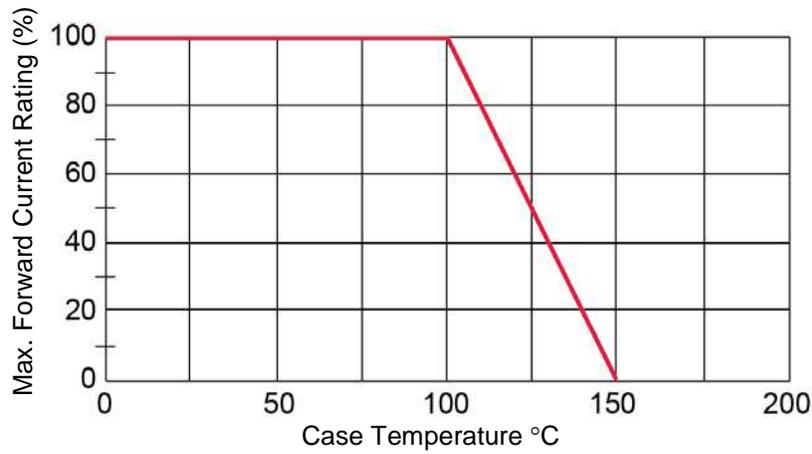


FIGURE 1
Derating Curve



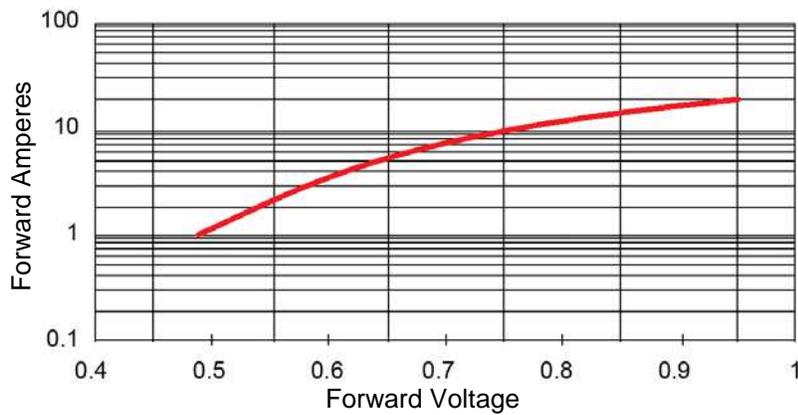


FIGURE 2
Typical Forward Voltage versus Forward Current

PACKAGE DIMENSIONS

NOTES:

1. Dimensions are in inches.
2. Millimeters are given for information only.
3. In accordance with ASME Y14.5M, diameters are equivalent to Φ x symbology.

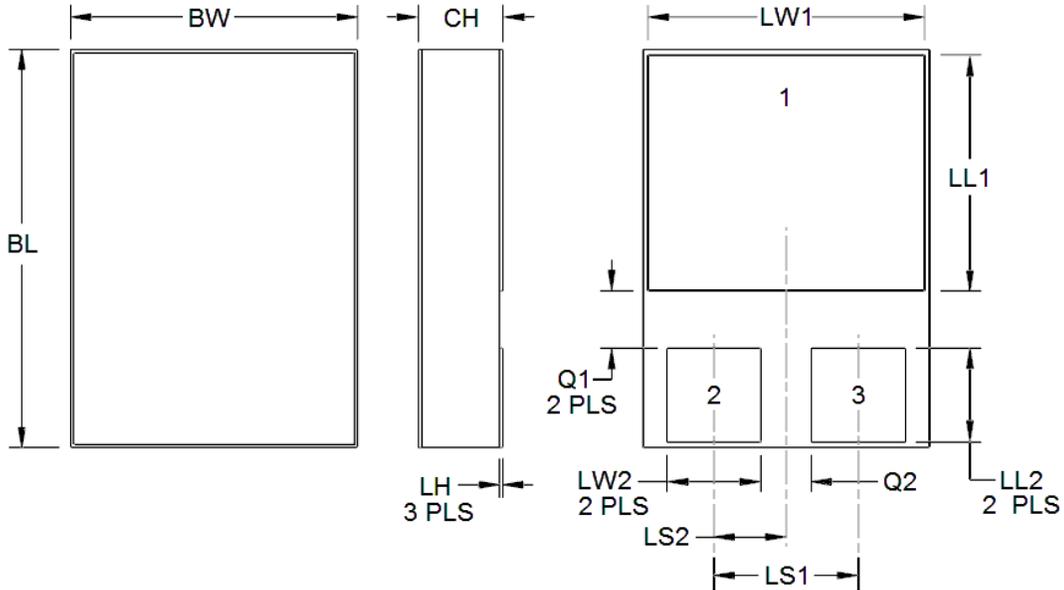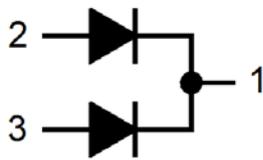

Schematic

| Symbol | DIMENSIONS | | | |
|---------------|-----------------------|-------|-------------|-------|
| | INCH | | MILLIMETERS | |
| | Min | Max | Min | Max |
| BL | 0.395 | 0.405 | 10.03 | 10.29 |
| BW | 0.291 | 0.301 | 7.39 | 7.65 |
| CH | 0.108 | 0.124 | 2.74 | 3.15 |
| LH | 0.010 | 0.020 | 0.25 | 0.51 |
| LL1 | 0.220 | 0.230 | 5.59 | 5.84 |
| LL2 | 0.115 | 0.125 | 2.92 | 3.18 |
| LS1 | 0.150 BSC | | 3.81 BSC | |
| LS2 | 0.075 BSC | | 1.91 BSC | |
| LW1 | 0.281 | 0.291 | 7.14 | 7.39 |
| LW2 | 0.090 | 0.100 | 2.29 | 2.54 |
| Q1 | 0.030 | | 0.76 | |
| Q2 | 0.030 | | 0.76 | |
| Term 1 | Common Cathode | | | |
| Term 2 | Anode (See Schematic) | | | |
| Term 3 | Anode (See Schematic) | | | |