

2 This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of APPROVED REV. **DESCRIPTION** DATE TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited 10/03/13 ORIGINAL ISSUE without the prior written consent of TRU Corporation.

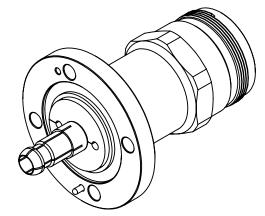

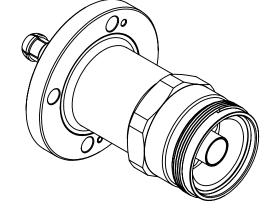

ENGINEERING DATA

ELECTRICAL:

D

IMPEDANCE: 50 OHMS NOMINAL

MECHANICAL:

INTERFACE: MEIA-1625(f) per TRU SPEC

1-5/8 EIA per EIA RS-225

MATERIAL:


CONTACTS: BRASS INSULATORS: PTFE

HOUSING & FLANGE: BRASS O-RINGS: SILICONE RUBBER

FINISH:

CONTACTS: SILVER PLATED


HOUSING & FLANGE: NICKEL PLATED

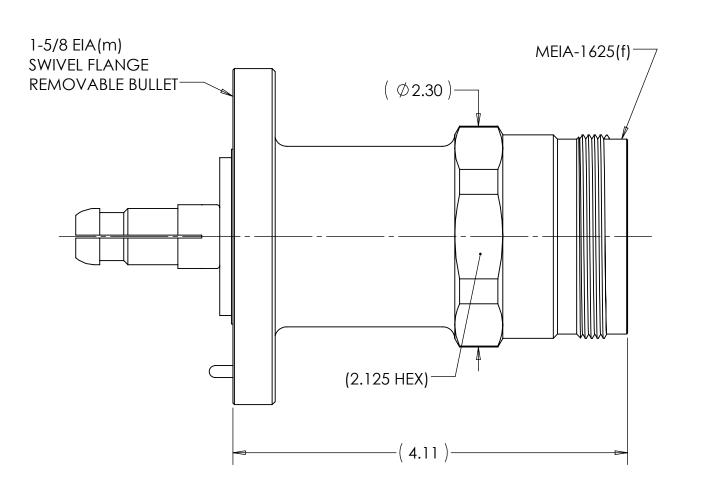

CHANGE PER ECO 4453

NOTES:

- UNLESS OTHERWISE SPECIFIED; ALL DIMENSIONS ARE FOR REFERENCE ONLY.
- SUPPLIED WITH THE FOLLOWING ITEMS:
 - QTY 4 5/16-18 X 1.50 HEX HEAD BOLT
 - QTY 4 5/16-18 HEX NUT
 - QTY 8 5/16 LOCKWASHER
 - QTY 1 O-RING

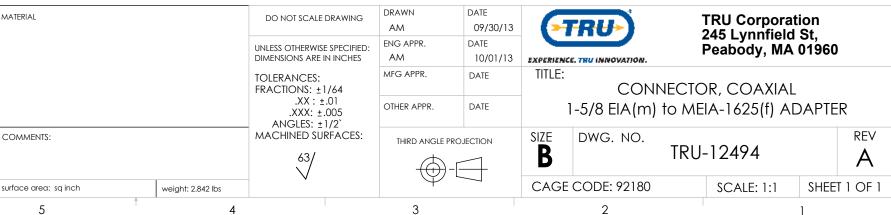

AM

ΤE

02/10/14