




UMTS May2012D

RoHS 6 Compliant

Type UMTS ,250V UMF
Square Ceramic Surface Mount Time Lag Fuse



UMTS Series Fuse

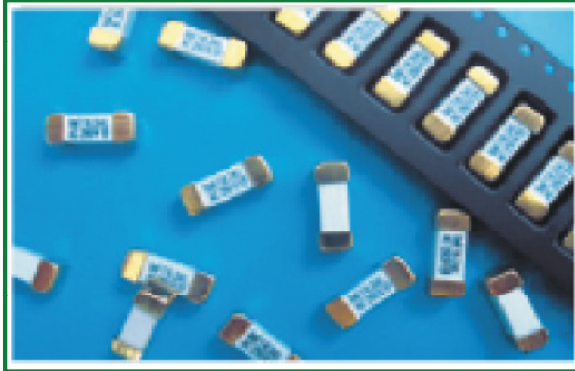

Features

- Time Lag
- 250VAC Voltage Rating
- Wide range of current rating from 100mA to 6.3A
- Wide operating temperature range
- Tape and Reel for auto-insert SMD process.
- RoHS6 compliant
- Halogen Free
- Leadfree

Applications

- Lighting system
- LCD monitor
- Office electronic equipment
- Industrial equipment
- Medical equipment
- Power supply

HALOGEN FREE =

LEAD FREE =

Electrical Characteristics

Testing Current	Blow Time	
	Minimum	Maximum
125%	1 Hr.	N/A
200%	N/A	2 Min.
1000%	0.01 Sec	0.1 Sec

Safety Agent Approvals

SAFETY AGENCY	SAFETY AGENCY CERTIFICATE	AMPERE RANGE / VOLT @ I.R.ABILITY
	E315341	100mA - 6.3A / 250V @150A AC and 350V @100A AC
		100mA - 6.3A / 250V @150A AC and 350V @100A AC

Type UMTS , 250V UMF

Square Ceramic Surface Mount Time Lag Fuse

RoHS 6 Compliant



UMTS May2012D

Electrical Specifications

Catalog Number	Ampere Rating (A)	Typical Cold Resistance (ohm)	Volt-drop @100% In (volt) Max.	Voltage Rating (V)	Interrupting Rating	Melting I ² T @ 10 In (A ² Sec)	Maximum Power Dissipation (W)	Agency Approvals	
UMTS 250	250mA	0.78	0.314	250	100mA - 6.3A / 250V @150A AC and 350V @100A AC	0.26	0.12	Y	Y
UMTS 315	315mA	0.56	0.279	250		0.42	0.14	Y	Y
UMTS 400	400mA	0.35	0.248	250		0.67	0.16	Y	Y
UMTS 500	500mA	0.245	0.221	250		1.1	0.19	Y	Y
UMTS 630	630mA	0.180	0.197	250		1.7	0.21	Y	Y
UMTS 800	800mA	0.132	0.175	250		2.8	0.25	Y	Y
UMTS 1	1A	0.085	0.156	250		4.4	0.28	Y	Y
UMTS 1.25	1.25A	0.065	0.139	250		7.0	0.33	Y	Y
UMTS 1.6	1.6A	0.061	0.110	250		5.6	0.37	Y	Y
UMTS 2	2A	0.043	0.108	250		9.2	0.43	Y	Y
UMTS 2.5	2.5A	0.035	0.106	250		15	0.50	Y	Y
UMTS 3.15	3.15A	0.025	0.104	250		25	0.57	Y	Y
UMTS 4	4A	0.020	0.101	250		42	0.66	Y	Y
UMTS 5	5A	0.014	0.099	250		69	0.75	Y	Y
UMTS 6.3	6.3A	0.011	0.097	250		113	0.87	Y	Y

Consult manufacturer for other ratings

CORPORATE OFFICE

Bel Fuse Inc.
 206 Van Vorst Street
 Jersey City, NJ 07302
 Tel 201-432-0463
 Fax 201-432-9542
 E-Mail: belfuse@belf.com
 Website: www.belfuse.com

FAR EAST OFFICE

Bel Fuse Ltd.
 8/F Luk Hop Industrial Building
 8 Luk Hop Street
 San Po Kong
 Kowloon, Hong Kong
 Tel 852-2328-5515
 Fax 852-2352-3706

EUROPE OFFICE


Bel Fuse Europe Ltd.
 Preston Technology Management Centre
 Marsh Lane, Suite F15
 Preston, Lancashire, PR1 8UQ
 United Kingdom
 Tel 44-1772-556601
 Fax 44-1772-561008

EUROPE


Bel Stewart GmbH
 Industriestrasse 20
 61381 Friedrichsdorf
 Germany
 Tel 49-6172-9552-0
 Fax 49-6172-9552-40

Soldering Parameters


IR Reflow Profile	
Reflow Parameter	
Minimum preheat temperature(TsMIN)	130°C
Maximum preheat temperature(TsMAX)	170°C
Preheat Time	60-180 seconds
TsMAX to TL ramp-up rate	3°C / second max.
Time above temperature TL(tL)	200 °C 60-120 seconds
Peak Temperature (TP)	240 °C max.
Time Within 5σ of Peak TP	20 - 30 seconds.
Ramp-down rate	6°C / second max.

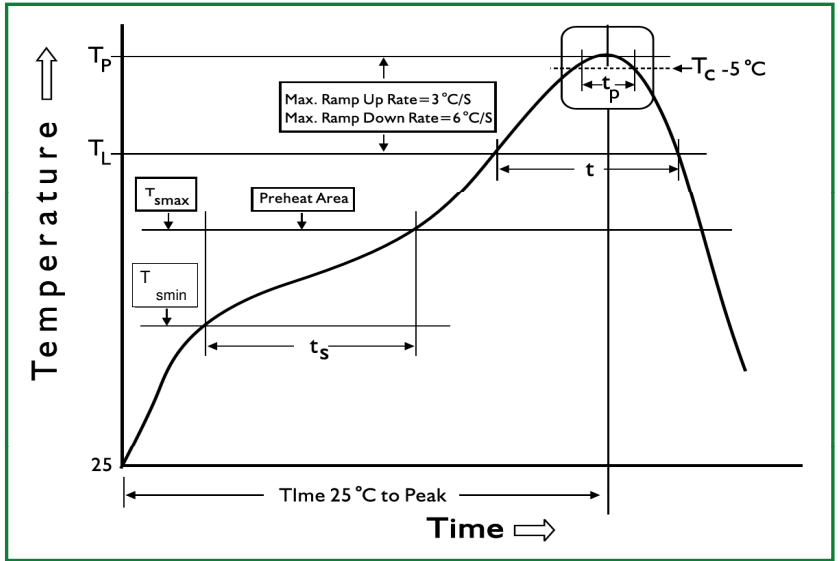

Temperature Derating Curve

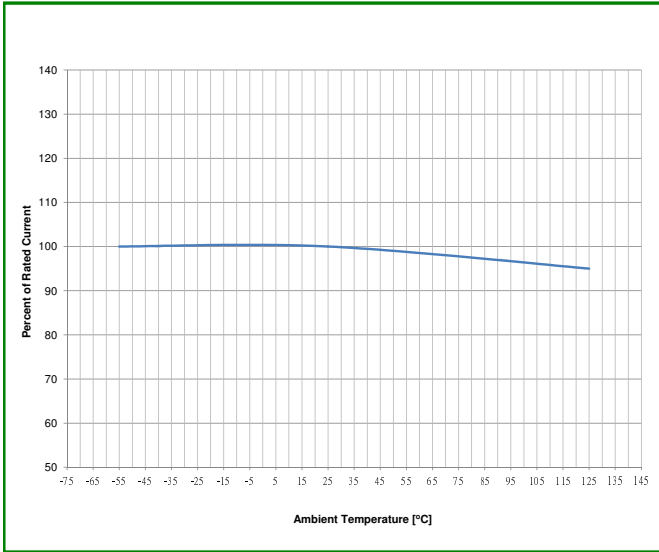

Average Time Current Curve

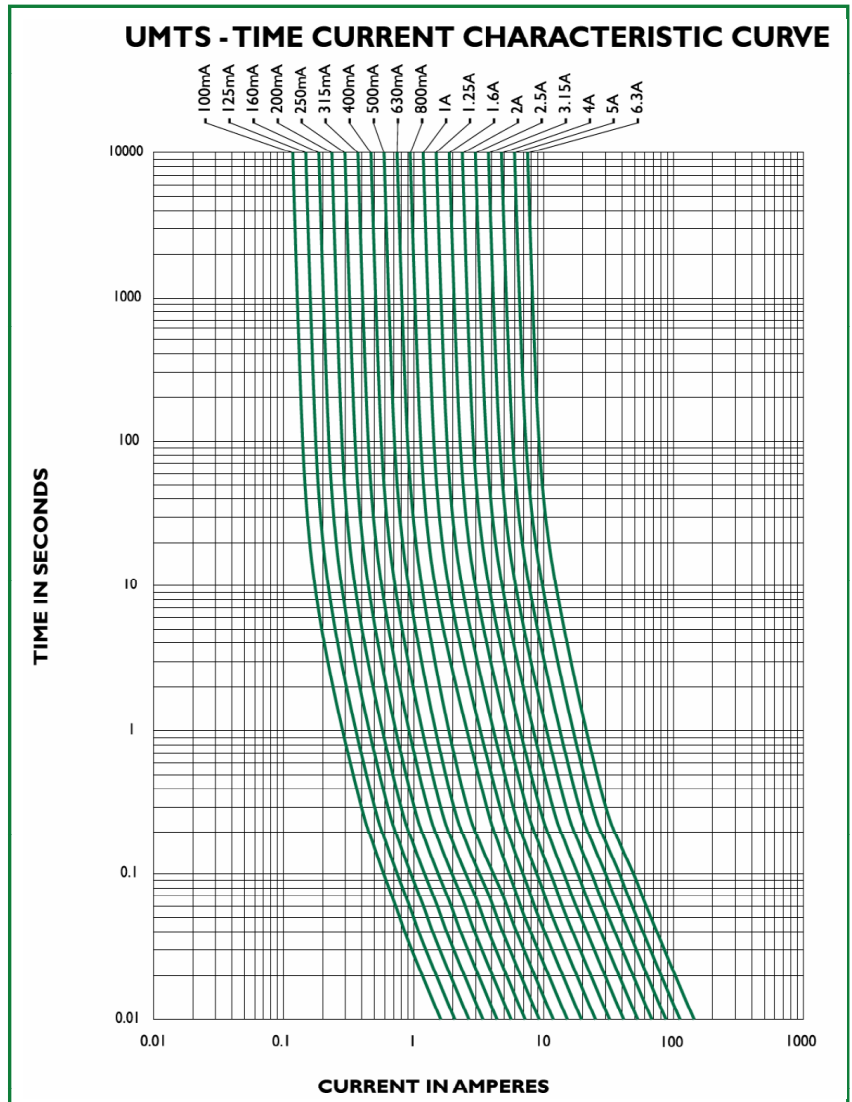

Type UMTS, 250V UMF

Square Ceramic Surface Mount Time Lag Fuse




Physical Specifications

Materials	Body : Ceramic
	Terminations: Brass Caps, gold plated with nickel undercoating
Marking	On Fuse: " bel ", " T ", " Current Rating ", " L ", "250V", in black color,
	On label:
	"bel" , "UMTS", "Current Rating", "Voltage Rating", "Interrupting Rating", "Appropriate Safety Logos" and , (China RoHS compliant).


Environmental Specifications

Shock Resistance	MIL-STD-202G, Method 213B, Test Condition I (100 G's peak for 6 milliseconds; Sawtooth Waveform)
Vibration Resistance	MIL-STD-202G, Method 201A (10-55 Hz, 0.06 inch, total excursion).
Salt Spray Resistance	MIL-STD-202G, Method 101E, Test condition B (48 hrs).
Insulation Resistance	MIL-STD-202G, Method 302, Test Condition B (After Opening) 0.1Mohms minimum.
Solderability	MIL-STD-202G, Method 208H
Resistance to solder Heat	MIL-STD-202G Method 210F, Test Condition J. (235 °C, 30 sec)
Thermal Shock	MIL-STD-202G, Method 107G, Test Condition B (-65 °C to +125 °C).
Operating Temperature	-55 °C to +125 °C

Mechanical Dimensions

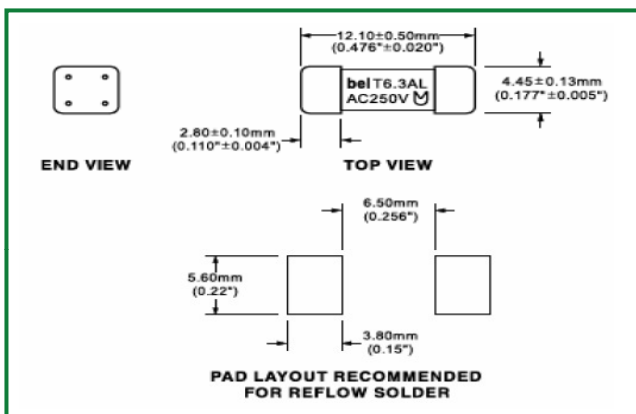

Ordering Information

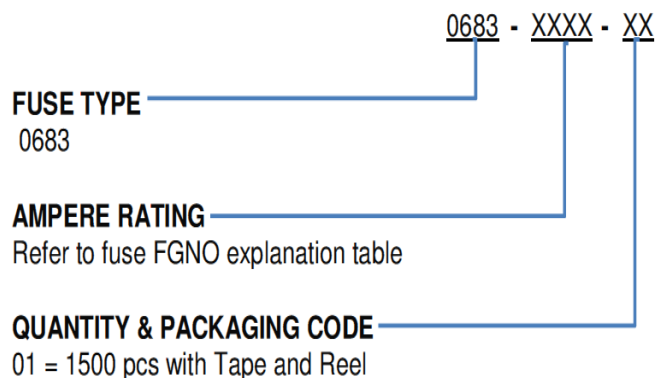

Packaging

Packaging Tape & Reel	Packaging Specification	Quantity	Quantity & Packaging Code
24 mm wide tape with 13 inches Diameter Reel	EIA Standard 481-D	1500	01

Specifications Subject to change without notice.

CORPORATE OFFICE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
E-Mail: belfuse@belf.com
Website: www. belfuse.com

FAR EAST OFFICE

Bel Fuse Ltd.
8/F Luk Hop Industrial Building
8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706

EUROPE OFFICE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite F15
Preston, Lancashire, PR1 8UQ
United Kingdom
Tel 44-1772-556601
Fax 44-1772-561008

EUROPE

Bel Stewart GmbH
Industriestrasse 20
61381 Friedrichsdorf
Germany
Tel 49-6172-9552-0
Fax 49-6172-9552-40