

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [1510413056](#)
Status: **Active**
Overview: [EdgeLine® High Speed Connectors](#)
Description: EdgeLine®+ ESP Vertical Connector, 15 Gbps, 0.75mm Pitch, 1.57mm PCB Thickness, 50.0A Power Module, 56 Circuits

Documents:

3D Model	Application Specification AS-172050-0001-001 (PDF)
Drawing (PDF)	Packaging Specification PK-172052-1000 (PDF)
Product Specification PS-151041-0001-001 (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification

CSA	LR19980
UL	E29179

General


Product Family	Edge Card Connectors
Series	151041
Circuit Size Range	1-64 Circuits
Component Type	Edgecard to PCB
Data Rate	12.5-20.0 Gbps
Edge Card Thickness	1.57mm
High Power Bay (30.0A or more)	Yes
Orientation	Vertical
Overview	EdgeLine® High Speed Connectors
Product Name	EdgeLine®
Standard Based	General
UPC	887191615035

Physical

(p)ower-(s)ignal Configuration	54s - 1p
Circuits (Loaded)	56
Circuits (maximum)	56
Color - Resin	Black
Durability (mating cycles max)	200
Entry Angle	N/A
Flammability	94V-0
Keying to Mating Part	N/A
Material - Metal	Copper Alloy
Material - Plating Mating	Gold over Nickel
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	6.649/g
PCB Locator	Yes
PCB Retention	Yes
Packaging Type	Tube
Pitch - Mating Interface	0.75mm
Pitch - Termination Interface	0.75mm
Plating min - Mating	0.762µm
Plating min - Termination	0.762µm
Polarized to Mating Part	Yes
Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	Surface Mount

Electrical

Current - Maximum per Contact	3.0A, 50.0A
Voltage - Maximum	250V AC (RMS)/DC

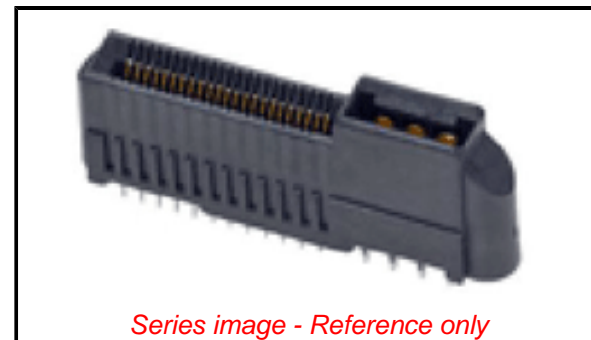

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per
-ED/01/2017 (12
January 2017)

Halogen-Free

Status

Low-Halogen

**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any
non-product compliance questions.

China ROHS

ELV

RoHS Phthalates

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[151041](#) Series

Solder Process Data

Duration at Max. Process Temperature (seconds)	040
Lead-free Process Capability	REFLOW
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	265

Material Info**Reference - Drawing Numbers**

Application Specification	AS-172050-0001-001
Packaging Specification	PK-172052-1000
Product Specification	PS-151041-0001-001
Sales Drawing	SD-151041-3056
Symbol/Footprint Data	SYM-151041-3056

This document was generated on 03/07/2017

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION