

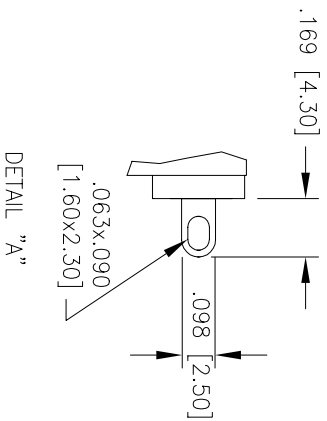
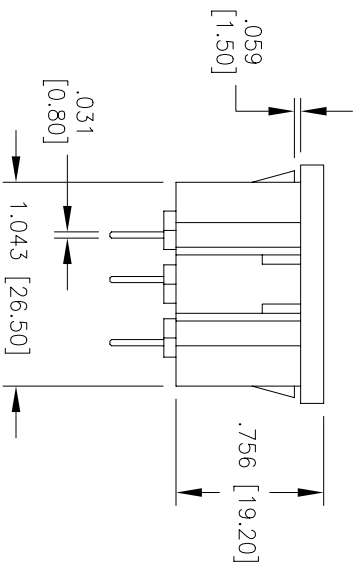
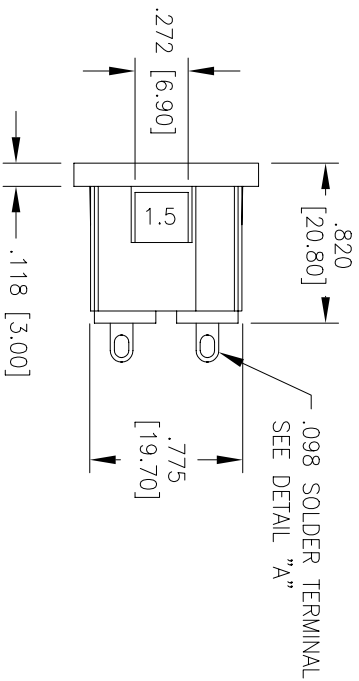


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/27/04	

APPROVED: _____ TITLE: _____
 DATE: _____

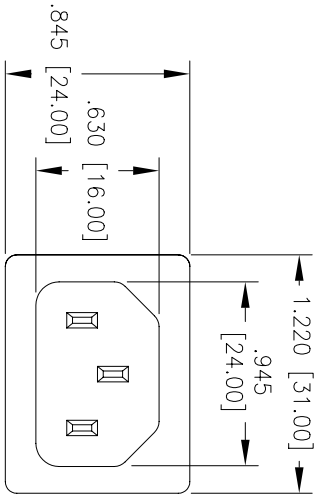

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-0, black
 Contacts: Brass QQ-B-626

Plating:

Contacts: 50 µin bright nickel to QQ-N-290, Class2, Grade C
 Terminals: 100 µin min bright tin plate to MIL-T-10727, Type 1 with 50 µin min copper underplate to MIL-C-14550

Electrical:

Operation voltage: 250 VAC max
 Current rating: 15 A max
 Insulation resistance: 100 Mohm min @ 500 VDC
 Dielectric withstanding voltage: 2000 VAC for 1 min.

Environmental:

Operating temperature: -40°C to +150°C
 Packaging: Anti-static plastic bags or corrugated boxes

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE MM [INCHES]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLDS
.XX ± .10	ØXX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

APPROVALS	DATE
DRAWN BS	4/27/04
CHECKED	
APPROVED	

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: IEC 60320 C14 MALE, SNAP IN, 1.50mm
 PANEL, .098 SOLDER TERMINALS

SIZE	PART NO.	REV.
X	IEC-C-3-150	-

REF.	SCALE:	NTS	SHEET	1 OF 1