


Features

- Low forward rise voltage (V_F) and satisfactory wave detection efficiency
- Small temperature coefficient of forward characteristic
- Extremely low reverse current I_R

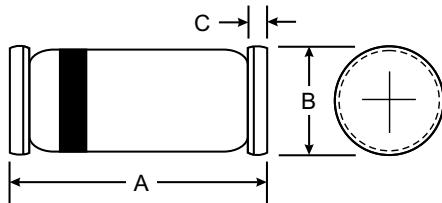

Mechanical Data

- Case: SOD-80/LL34, Glass
- Terminals: Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 0.05 grams (approx.)



LL34/ SOD-80		
Dim	Min	Max
A	3.30	3.70
B	1.30	1.60
C	0.28	0.50

All Dimensions in mm

Maximum Ratings @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Parameter		Symbol	Rating		Unit
Reverse Voltage (DC)	LL700	V_R	15		V
	LL700A		30		
Peak Reverse Voltage	LL700	V_{RM}	15		V
	LL700A		30		
Forward Current (DC)	I_F		30		mA
Peak Forward Current	I_{FM}		150		mA
Junction Temperature	T_j		125		°C
Storage Temperature Range	T_s		-55 to +125		°C

Characteristics at $T_a = 25^\circ\text{C}$

Parameter		Symbol	Conditions	Min	Typ	Max	Unit
Forward Voltage (DC)	V_{F1}	$I_F = 1\text{mA}$	$V_R = 15\text{V}$	-	-	0.4	V
	V_{F2}					1	
Reverse Current (DC)	LL700	I_R	$V_R = 30\text{V}$	-	-	100	nA
	LL700A					150	
Terminal Capacitance	C_t	$V_R = 1\text{V}$, $f = 1\text{MHz}$		-	1.3	-	pF
Reverse Recovery Time*	t_{rr}	$I_F = I_R = 10\text{mA}$, $I_{rr} = 1\text{mA}$, $R_L = 100\Omega$		-	1	-	ns
Detection Efficiency	η	$V_{in} = 3V_{(\text{peak})}$, $f = 30\text{MHz}$, $R_L = 3.9\text{k}\Omega$, $C_L = 10\text{pF}$		-	60	-	%

Note: (1) Schottky barrier diode is sensitive to electric shock (static electricity, etc.). Due attention must be paid on the charge of a human body and the leakage of current from the operating equipment.

(2) Rated input / output frequency: 2,000MHz.

(3) *: t_{rr} measuring instrument