

### MLZ1608N2R2LT000









Applications	Commercial Grade
Feature	Shield Magnetic Shield  Multilayer Multilayer  Ferrite Core Ferrite Core
Series   Type	MLZ
Status	Production
Brand	TDK



	Size	
Length(L)	1.60mm ±0.15mm	
Width(W)	0.80mm ±0.15mm	
Thickness(T)	0.80mm ±0.15mm	
Recommended Land Pattern (A)	0.60mm Nom.	
Recommended Land Pattern (B)	0.80mm Nom.	
Recommended Land Pattern (C)	0.80mm Nom.	

Electrical Characteristics				
Inductance	$2.2\mu H$ $\pm 20\%$ at $2MHz$			
Rated Current (L Change) [Typ.]				
Rated Current (L Change) [Max.]	110mA (50% Down)			
Rated Current (Temperature Rise) [Typ.]	500mA (20°C Rise)			
Rated Current (Temperature Rise) [Max.]	110mA (20°C Rise)			
DC Resistance [Typ.]	180mΩ			
DC Resistance [Max.]	234mΩ			
Self Resonant Frequency [Min.]				
Self Resonant Frequency [Typ.]				
Q [Min.]				
Q [Typ.]				

Other		
Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125°C	
	Wave (Flow)	
Soldering Method	Reflow	
	Iron Soldering	
AEC-Q200	No	
Packing	Punched (Paper)Taping [180mm Reel]	
Package Quantity	4000pcs	
Whates are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.	0.004g	

#### MLZ1608N2R2LT000














## Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

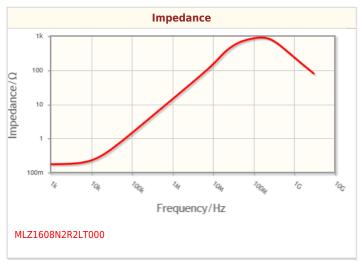

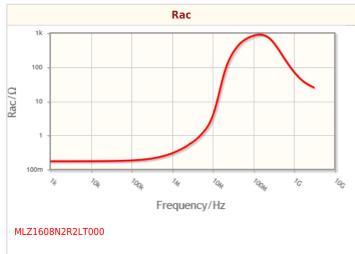

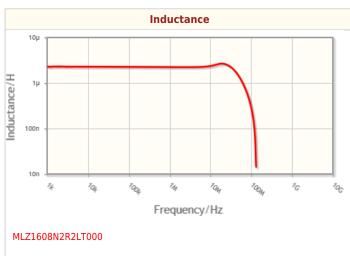

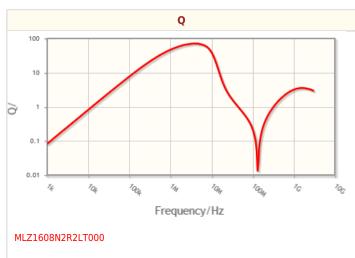

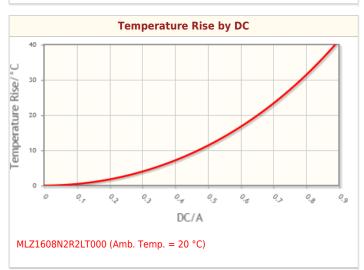

<sup>!</sup> Images are for reference only and show exemplary products.

<sup>!</sup> This PDF document was created based on the data listed on the TDK Corporation website.

<sup>!</sup> All specifications are subject to change without notice.

#### MLZ1608N2R2LT000










# **Associated Images**



<sup>!</sup> Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

<sup>!</sup> All specifications are subject to change without notice.