

Coaxial

# Power Splitter/Combiner

## ZC16PD-252+

16 Way-0° 50Ω 10 to 2500 MHz

### Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.75W max.

Permanent damage may occur if any of these limits are exceeded.

### Coaxial Connections

SUM PORT	S
PORT 1,2,3,.....,16	1,2,3,.....,16

### Outline Drawing

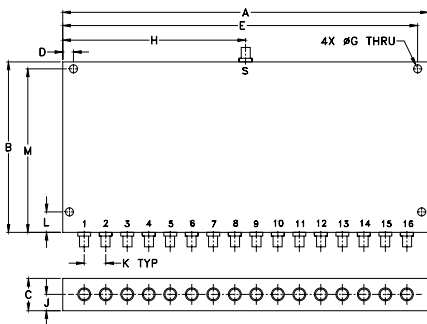

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
8.50	3.95	.75	.250	8.250	—	.187
215.90	100.33	19.05	6.35	209.55	—	4.75
H	J	K	L	M	wt	
4.250	.38	.500	.475	3.475	grams	
107.95	9.65	12.70	12.07	88.27	710	

### Features

- wide frequency band 10 to 2500 MHz
- good amplitude unbalance, 0.3 dB typ.
- good phase unbalance, 5 deg. typ.

### Applications

- UHF
- cellular, GPS, PCS
- communication systems



CASE STYLE: UU179

Connectors	Model
SMA	ZC16PD-252-S+

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Electrical Specifications




FREQ. RANGE (MHz)	ISOLATION (dB)			INSERTION LOSS (dB) ABOVE 12 dB			PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)								
	L	M	U	L	M	U	L	M	U	L	M	U						
$f_L$ - $f_U$	Typ. Min.	Typ. Min.	Typ. Min.	Typ. Max.	Typ. Max.	Typ. Max.	Max.	Max.	Max.	Max.	Max.	Max.						
10-2500	25	20	17	14	16	14	1.5	2.8	3.2	4.5	5.5	6.5	2	10	18	0.7	0.7	1.0

L = low range [ $f_L$  to 10  $f_L$ ] M = mid range [10  $f_L$  to  $f_U/2$ ] U = upper range [ $f_U/2$  to  $f_U$ ]


### Typical Performance Data

Freq. (MHz)	Total Loss <sup>1</sup> (dB)	Amplitude Unbalance (dB)	Isolation (dB)		Phase Unbalance (deg.)	VSWR S	VSWR 1
			1-2	3-4			
10.00	13.44	0.04	26.46	26.50	0.15	1.23	1.62
150.00	13.72	0.04	21.16	21.11	0.58	1.34	1.45
300.00	13.75	0.06	18.51	18.51	1.03	1.15	1.36
450.00	13.84	0.09	17.52	17.57	1.36	1.25	1.30
600.00	14.09	0.10	17.24	17.31	1.83	1.46	1.25
750.00	14.04	0.10	18.16	18.25	2.29	1.13	1.22
900.00	14.41	0.12	17.82	17.85	2.89	1.52	1.25
1100.00	15.04	0.12	17.74	17.75	3.68	1.92	1.18
1300.00	15.25	0.20	24.90	24.74	4.85	1.80	1.13
1500.00	15.90	0.35	24.08	23.44	5.73	1.90	1.28
1700.00	16.15	0.46	19.18	18.86	5.75	1.75	1.37
1900.00	16.95	0.47	17.09	16.69	4.97	2.01	1.41
2100.00	16.74	0.49	18.71	18.53	6.11	1.59	1.30
2300.00	16.61	0.37	22.77	22.36	6.46	1.10	1.21
2500.00	17.22	0.51	26.28	26.00	7.35	1.11	1.12

1. Total Loss = Insertion Loss +12dB splitter loss.

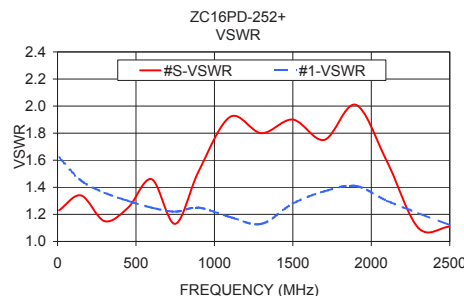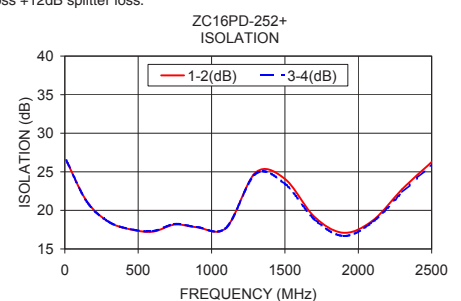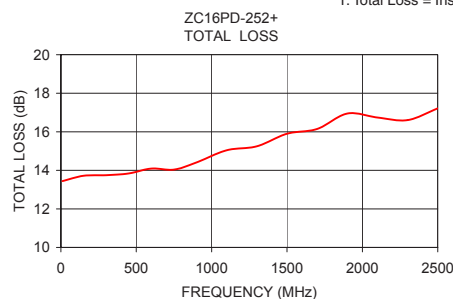

### electrical schematic

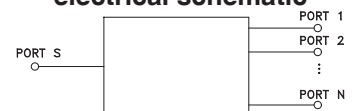

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/WCLStore/terms.jsp](http://www.minicircuits.com/WCLStore/terms.jsp)



[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. B  
M151107  
ED-12956/1  
ZC16PD-252-S+  
HY/TD/AM  
161222