

▶ MXC-6000 Series

Powerful Intel® Core™ i7 Fanless Expandable Embedded Computer with PCI/PCIe Slots



Introduction

The Matrix MXC-6000 series of powerful fanless, expandable embedded computers feature the new Intel® Core i7 2.0 GHz processor for maximized computing. The MXC-6000 inherits its exceptional fanless and cable-free design from ADLINK's existing Matrix C series.

The MXC-6000 series' Intel® Core i7 2.0 GHz processor and Intel® QM57 chipset deliver a level of performance ideal for image and vision measurement and automation applications. PCI and PCIe slots allow integration of off-the-shelf PCI/PCIe cards for development of configurable application platforms. 16 built-in isolated DIO channels enable standardized industrial control. A DVI-I connector output on the front panel allows direct connection to a LCD panel, and one eSATA port supports storage expansion or hot-swapping SATA drives.

Leveraging a reliable fanless and durable cable-free design, the MXC-6000 series exhibits excellent dependability in harsh environments, where severe temperature variation and vibration may exist. The MXC-6000 series provides an optional hot-pluggable fan module to dissipate heat generated within the system when high power consumption PCI/PCIe cards are installed. This inventive mechanical design retains a cable-free structure which dramatically improves thermal stability when PCI/PCIe cards are installed.

The MXC-6000 also provides an USB 2.0 port internally located on a riser card, enabling heightened reliability for secure applications, with license keys or password encryption on an internal USB dongle dramatically improve system security. Combining a reliable design with more computing power and innovative features, the Matrix MXC-6000 series is the optimal choice on which to base any rugged application system.

Combining a reliable design with more computing power and innovative features, the Matrix MXC-6000 series is the optimal choice on which to base any rugged application system.

*Extending the operating temperature to -10°C to +60°C is optional and requires use of an industrial solid-state drive storage device. Heat dissipation from inserted PCI/PCIe cards may affect thermal performance

Features

- Intel® Core i7-620LE 2.0 GHz processor + Intel® QM57 chipset
- Configurable, providing PCI and PCIe x4 slots
- Rugged, -10°C to 60°C fanless operation*
- Built-in 9 Vdc to 32 Vdc wide-range DC power input
- VGA+ DVI-D display by DVI-I connector
- Dual 1000/100/10 Mbps Ethernet ports, 2 RS-232 ports and 2 software-selectable RS-232/422/485 ports
- USB 2.0 port internally on riser card, built-in 16-CH isolated DI and 16-CH isolated DO
- RAID 0, 1 function available through 2 internal SATA-connected HDD or one internal SATA-connected HDD and one external eSATA-connected HDD

Applications

- Machine Automation
- Image & Vision Measurement
- Factory Control
- Test Instrumentation
- Safety Surveillance

Software Support

- Windows® XP / XP Embedded / 7, INtime®, Linux*
- *Linux Distribution by Request
- *Custom BIOS is necessary to support INtime®

■ Easy-to-install Hot-pluggable Fan Module



1. Undo the thumbscrew by hand



2. Withdraw the thumbscrew and remove the top cover




3. Replace it by plugging the hot-pluggable fan module cover into the fan connector on CPU board

■ A More Reliable Design of Internal USB Port




The Matrix internal USB 2.0 port provides increased application security with connectivity for license keys or password encryption on USB dongle.

■ MXC-6000 Series Front Panel

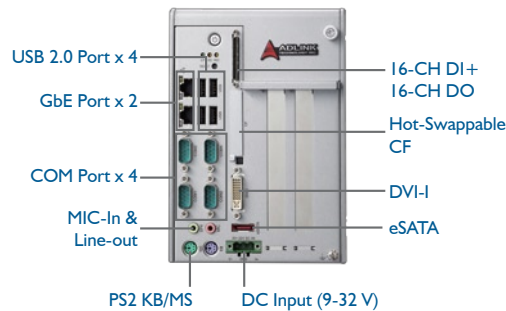

■ Inside of the MXC-6000 Series

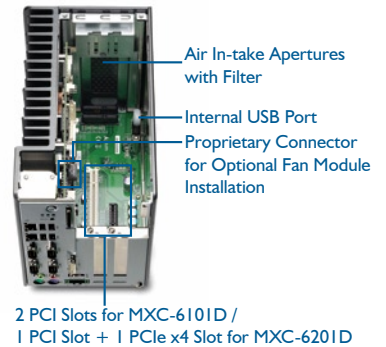

Specifications

Model Name	MXC-6101D	MXC-6201D
System Core		
■ Processor	Intel® Core i7-620LE 2.0 GHz CPU	
■ Chipset	Intel® QM57	
■ Video	VGA+DVI display by DVI-I connector <ul style="list-style-type: none"> • Analog CRT, supports QXGA (2048 x 1536) resolution • DVI-I 1.0 (DVI + VGA) (with external cable for connecting DVI-I connector to DVI-D and VGA device) • Optional 48-bit LVDS (by Internal box header) 	
■ Memory	2 GB DDR3 800/1066 MHz SODIMM module (Max. capacity 4GB SODIMM module option)	
I/O Interface		
■ Expansion Slots	2 PCI slots	1 PCI slot and 1 PCIe x4 slot
■ Ethernet	2 GbE ports (2 Intel® 82574L)	
■ Serial Port	2 software-programmable RS-232/422/485 (COM1 & COM2) 2 RS-232 (COM3 & COM4)	
■ USB	4 USB 2.0 ports (external), 1 USB 2.0 port (internal)	
■ Audio	1 mic-in and 1 line-out	
■ KB/MS	1 PS/2 keyboard and 1 PS/2 mouse	
■ DIO	16-CH isolated DI + 16-CH isolated DO	
Power Supply		
■ DC Input	AT/ATX, built-in 9-32 V _{DC} wide-range DC power input 3P pluggable connector with latch (GND, V-, V+)	
■ AC Input	Optional 100 W external AC-DC adapter for AC input	
Storage Device		
■ SATA HDD	On-board SATA port for 2.5" HDD/SSD installation Support SATA RAID 0, 1	
■ CompactFlash	1 external type II CompactFlash socket 1 internal type II CompactFlash socket	
■ eSATA	1 eSATA interface connector for external storage expansion	
Mechanical		
■ Optional Fan Module	Optional hot-pluggable fan module for dissipating heat generated by PCI/PCIe card	
■ Dimensions	130 mm (W) x 225 mm (D) x 183 mm (H) (5.1" x 8.9" x 7.2")	
■ Weight	3.5 kg (7.72 lbs)	
■ Mounting	Wall-mount kit	
Environmental		
■ Operating Temperature*	Standard: 0°C to 50°C (w/HDD) Extended option: -10°C to 60°C (w/industrial SSD)	
■ Storage Temperature	-40°C to 85°C (excl. HDD/SSD/CF)	
■ Humidity	~95% @ 40°C (non-condensing)	
■ Vibration	Operating, 5 Grms, 5-500 Hz, 3 axes (w/ CF or SSD) Operating, 0.5 Grms, 5-500 Hz, 3 axes (w/ HDD)	
■ Shock	Operating, 50 G, Half sine 11 ms duration (w/ CF or SSD)	
■ EMC	CE and FCC Class A	

*Without PCI/PCIe card installation.

Ordering Information

Model Name	Description	PCI	PCIe x4	GbE	eSATA	COM	USB	Memory	DIO
MXC-6101D	Intel® Core i7-620LE 2.0 GHz fanless expandable embedded computer	2	0	2	1	4	5	2 GB DDR3	16 DI + 16 DO
MXC-6201D	Intel® Core i7-620LE 2.0 GHz fanless expandable embedded computer	1	1	2	1	4	5	2 GB DDR3	16 DI + 16 DO

Optional Accessories

MXC-6000 Optional Fan Module	Hot-pluggable fan module for the MXC-6000 series
4 GB DDR3 upgrade	Upgrade to 4 GB DDR3 memory
320 GB HDD option	Factory-installed SATA hard disk drive (0 to 60°C)
32 GB SSD option	Factory-installed 32 GB SATA solid-state drive (0 to 70°C)
8 GB industrial SSD option	Factory-installed 8 GB industrial-grade SATA solid-state drive (-40 to 85°C)
100 W AC-DC adapter	100 W industrial-grade AC-DC adapter (-20 to 70°C)
DVI-I to VGA&DVI-D cable	External cable for connecting DVI-I to DVI-D and VGA devices
Auxiliary power cable	Auxiliary power cable for providing PCI and PCIe card external power suppliers
Extended Temperature Option*	Optional Screening to extend the operating temperature of the MXC-6000 series to -10°C to 60°C

*This option guarantees cold boot of the system at -10°C and operation with 100% loading at 60°C. The industrial solid-state drive storage option is required.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ADLINK Technology:](#)

[MXC-6201D/SSD32G-M](#) [MXC-6101D/HDD320G](#) [MXC-6201D/HDD320G](#) [MXC-6201D/M4G/HDD320G](#) [MXC-6101D/M4G](#) [MXC-6201D/M4G](#) [MXC-6201D/Fan](#) [MXC-6101D/Fan](#) [MXC-6101D](#) [MXC-6201D](#)