

TO-220-3L Plastic-Encapsulate MOSFETS

CJP08N60 N-Channel Power MOSFET


GENERAL DESCRIPTION

This advanced high voltage MOSFET is designed to stand high energy in the avalanche mode and switch efficiently. This new high energy device also offers a drain-to-source diode fast recovery time. Designed for high voltage, high speed switching applications such as power supplies, converters, power motor controls and bridge circuits.

FEATURE

- High Current Rating
- Lower $R_{DS(on)}$
- Lower Capacitance
- Lower Total Gate Charge
- Tighter V_{SD} Specifications
- Avalanche Energy Specified

TO-220-3L

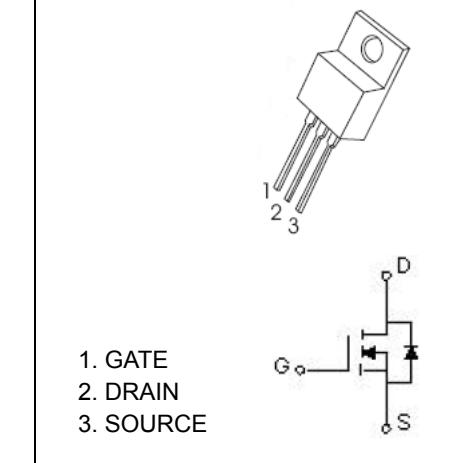

Maximum ratings ($T_a=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	600	V
Gate-Source Voltage	V_{GS}	± 30	
Continuous Drain Current	I_D	8	A
Pulsed Drain Current	I_{DM}	32	
Single Pulsed Avalanche Energy (note1)	E_{AS}	250	mJ
Power Dissipation	P_D	2	W
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	62.5	$^\circ\text{C}/\text{W}$
Operating and Storage Temperature Range	T_J, T_{STG}	-55 ~+150	$^\circ\text{C}$
Maximum lead temperature for soldering purposes , Duration 5 seconds	T_L	260	

Electrical characteristics ($T_a=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Off characteristics						
Drain-source breakdown voltage	$V_{(\text{BR})\text{DSS}}$	$V_{GS} = 0\text{V}, I_D = 250\mu\text{A}$	600			V
Drain-source diode forward voltage(note2)	V_{SD}	$V_{GS} = 0\text{V}, I_S = 7\text{A}$			1.4	
Zero gate voltage drain current	I_{DSS}	$V_{DS} = 600\text{V}, V_{GS} = 0\text{V}$			1	μA
Gate-body leakage current (note2)	I_{GSS}	$V_{DS} = 0\text{V}, V_{GS} = \pm 30\text{V}$			± 100	nA
On characteristics (note2)						
Gate-threshold voltage	$V_{GS(\text{th})}$	$V_{DS} = V_{GS}, I_D = 250\mu\text{A}$	2.0		4.0	V
Static drain-source on-resistance	$R_{DS(\text{on})}$	$V_{GS} = 10\text{V}, I_D = 4\text{A}$			1.3	Ω
Dynamic characteristics (note 3)						
Input capacitance	C_{iss}	$V_{DS} = 25\text{V}, V_{GS} = 0\text{V}, f = 1\text{MHz}$			1280	pF
Output capacitance	C_{oss}				120	
Reverse transfer capacitance	C_{rss}				11	
Switching characteristics (note 3)						
Turn-on delay time (note3)	$t_{d(on)}$	$V_{DD} = 300\text{V}, V_{GS} = 10\text{V}, R_G = 25\Omega, I_D = 7\text{A}$			80	ns
Turn-on rise time (note3)	t_r				165	
Turn-off delay time (note3)	$t_{d(off)}$				160	
Turn-off fall time (note3)	t_f				120	

Notes :

1. $I_L = 8\text{A}, V_{DD} = 50\text{V}, R_G = 25\Omega, \text{Starting } T_J = 25^\circ\text{C}$.
2. Pulse Test : Pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$.
3. These parameters have no way to verify.