


5" x 5" x 1,496" 127 x 127 x 38 mm

Series
337D

ETRI[®]

DC Axial Fans

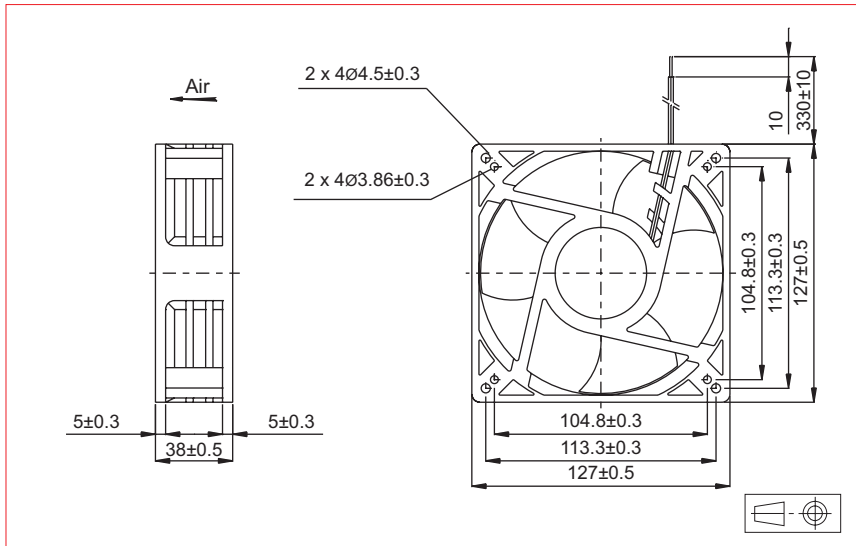

Approvals






Life expectancy

L-10 LIFE AT 40°C:
70 000 hours

Brushless DC Motor
 Electrical protection: integrated circuit
 Housing material: plastic UL 94 V0
 Impeller material: plastic UL 94 V0
 Maximum weight: 370 g
 Bearing system: ball bearings
 Connection: flying leads
 IP 20

Available with:
 - Speed sensor
 - Alarm
 - IP 54 / IP 55

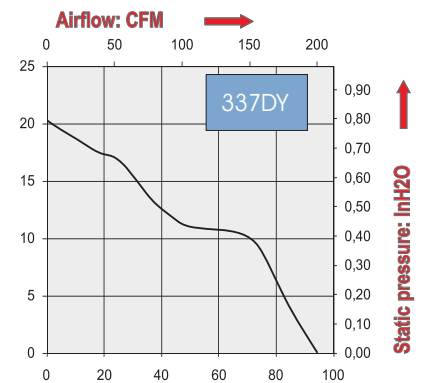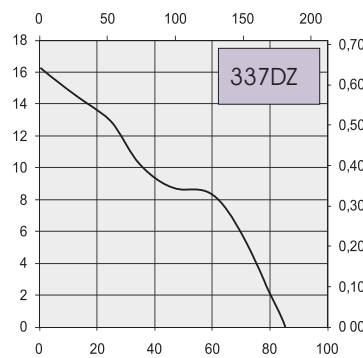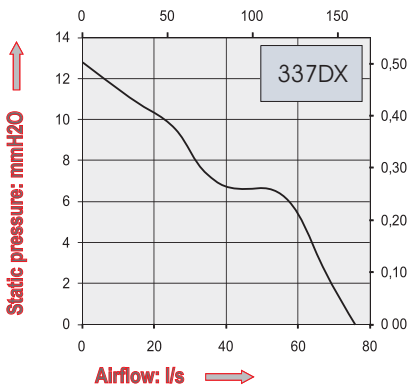

Part Number	Nominal voltage	Airflow	Noise level	Nominal speed	Input Power	Voltage range	Operating temperature	
	V	l/s	dB(A)	RPM	W	V	Min.°C	Max.°C
337DX1LP11000A	12	75,5	53,0	3050	15,8	(7-13,2)	-10	70
337DX2LP11000A	24	75,5	53,0	3050	14,4	(14-26,4)	-10	70
337DX4LP11000A	48	75,5	53,0	3050	15,8	(28-56)	-10	60
337DZ1LP11000A	12	85,0	56,5	3450	22,2	(7-13,2)	-10	70
337DZ2LP11000A	24	85,0	56,5	3450	20,2	(14-26,4)	-10	70
337DZ4LP11000A	48	85,0	56,5	3450	21,6	(28-56)	-10	60
337DY1LP11000A	12	94,4	59,5	3850	32,9	(8,5-13,2)	-10	70
337DY2LP11000A	24	94,4	59,5	3850	28,8	(14-26,4)	-10	70
337DY4LP11000A	48	94,4	59,5	3850	32,2	(28-56)	-10	60