




High current density due to double mesa technology; SIPOS and Glass Passivation. IPT12Q06-xx series are suitable for general purpose AC Switching. They can be used as an ON/OFF function In application such as static relays, heating regulation, Induction motor stator circuits... or for phase Control operation light dimmers, motor speed Controllers. The IPT12Q06-xxA(Insulated version) series are isolated internally, they provided a 2500V RMS isolation voltage from all three terminals to external heatsink.

MAIN FEATURES

Symbol	Value	Unit
$I_{T(RMS)}$	12	A
V_{DRM} / V_{RRM}	600	V
V_{TM}	≤ 1.55	V

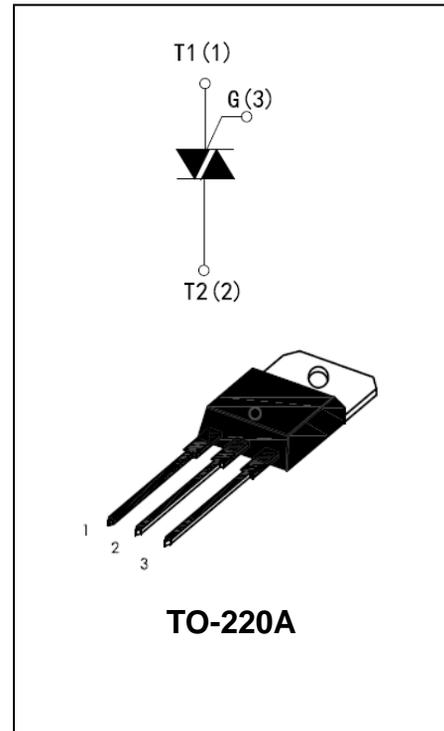

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Storage Junction Temperature Range	T_{stg}	-40 to +150	$^{\circ}C$
Operating Junction Temperature Range	T_j	-40 to +125	$^{\circ}C$
Repetitive Peak Off-state Voltage $T_j = 25^{\circ}C$	V_{DRM}	600	V
Repetitive Peak Reverse Voltage	V_{RRM}	600	V
Non Repetitive Peak Off-state Voltage $T_j = 25^{\circ}C$	V_{DSM}	700	V
Non Repetitive Peak Reverse Voltage	V_{RSM}	700	V
RMS on-state current (Full sine wave) $T_c = 95^{\circ}C$	$I_{T(RMS)}$	12	A
Non repetitive surge peak on-state Current $f = 60Hz$ $t = 16.7ms$ (full cycle, $T_j = 25^{\circ}C$)	I_{TSM}	126 120	A
I^2t Value for fusing $t_p = 10ms$	I^2t	78	A^2s
Critical Rate of rise of on-state current $I_G = 2xI_{GT}$, $t_r \leq 100ns$, $f = 120Hz$, $T_j = 125^{\circ}C$	di / dt	50	A/us
Peak gate current $t_p = 20us$, $T_j = 125^{\circ}C$	I_{GM}	4	A
Average gate power dissipation $T_j = 125^{\circ}C$	$P_{G(AV)}$	1	W

ELECTRICAL CHARACTERISTICS(T_j = 25 °C unless otherwise specified)

Symbol	Test Condition	Quadrant		IPT12Q06xxA		Unit
				CE	BE	
I _{GT}	V _D = 12V R _L = 30Ω	I – II – III IV	MAX	25 50	50 100	mA
V _{GT}		ALL	MAX	1.3		V
V _{GD}	V _D =V _{DRM} , R _L =3.3KΩ, T _j = 125 °C	ALL	MIN	0.2		V
I _L	I _G = 1.2 I _{GT}	I – III – IV	MAX	40	50	mA
		II		80	100	
I _H	I _T = 100mA		MAX	200	400	mA
dV/dt	V _D = 67% V _{DRM} gate open T _j = 125 °C		MIN			V/us

STATIC CHARACTERISTICS


Symbol	Test Conditions		Value(MAX)	Unit
V _{TM}	I _{TM} = 17A, t _p = 380uS	T _j = 25 °C	1.55	V
I _{DRM}	V _D = V _{DRM}	T _j = 25 °C	5	uA
I _{RRM}	V _R = V _{RRM}	T _j = 125 °C	1	mA

THERMAL RESISTANCES

Symbol	Parameter	Value	Unit
R _{th(j-c)}	Junction to case (AC)	2.3	°C/W

PACKAGE MECHANICAL DATA

TO-220A

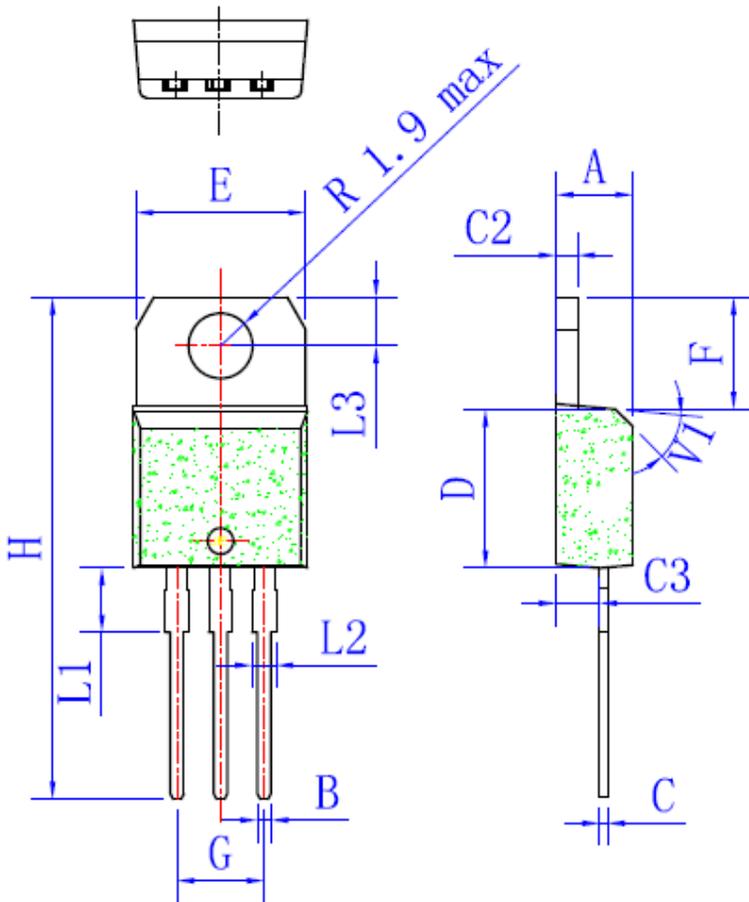

	Millimeters		
	Min	Typ	Max
A	4.4		4.6
B	0.61		0.88
C	0.46		0.70
C2	1.23		1.32
C3	2.4		2.72
D	8.6		9.7
E	9.8		10.4
F	6.2		6.6
G	4.8		5.4
H	28		29.8
L1		3.75	
L2	1.14		1.7
L3	2.65		2.95
V		40°	

Fig. 1: Maximum power dissipation versus RMS on-state current(full cycle)

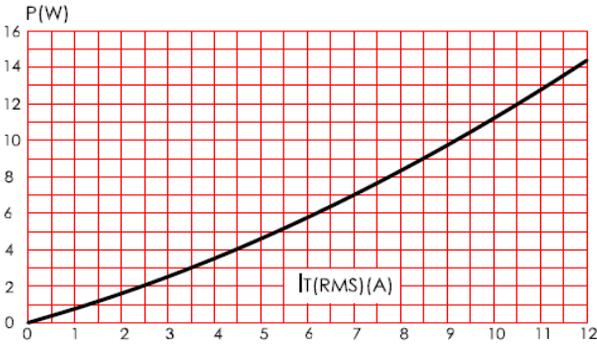


Fig. 2: RMS on-state current versus case temperature(full cycle)

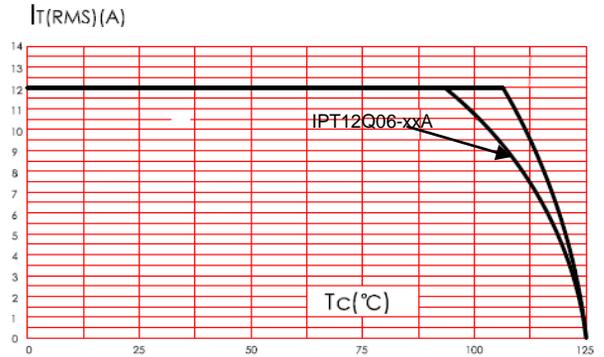


Fig. 3: on-state characteristics (maximum values)

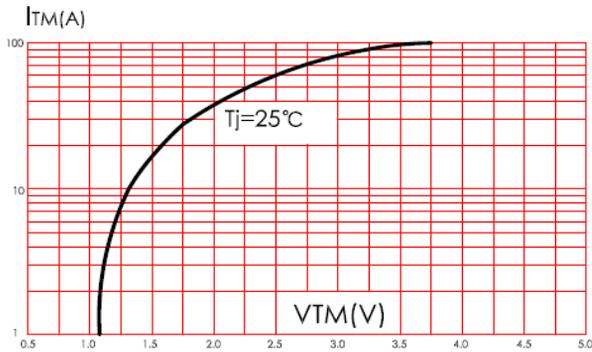


Fig. 4: Surge peak on-state current versus number of cycles

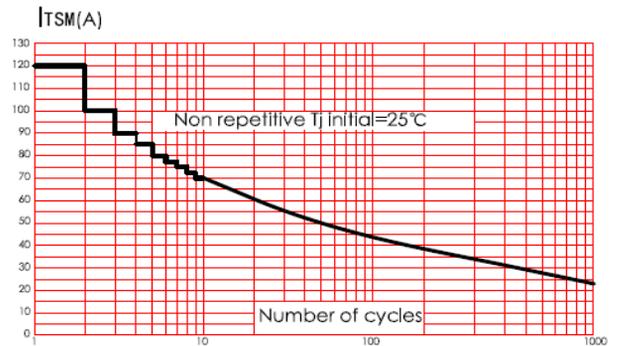


Fig. 5: Non-repetitive surge peak on-state current for a sinusoidal pulse with width $t_p < 10\text{ms}$

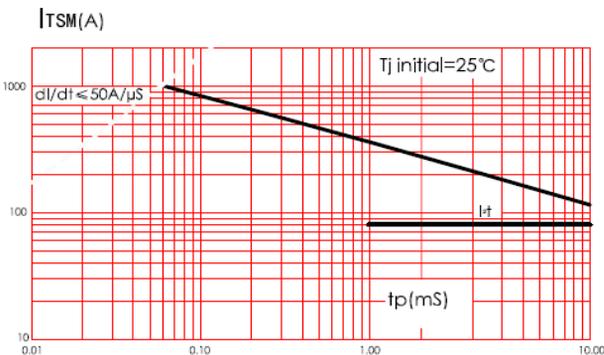


Fig. 6: Relative variation of gate trigger current, holding current and latching current versus junction temperature(typical values)

