


## 2 Pt100 KN 3045

The KN Series Ceramic Wire Wound PRTDs are suitable for general applications requiring temperature stability. The dual sensor can be used in redundancy systems.

Applications: Industrial resistance thermometers, especially in chemical, power generation plants and analytical equipment.

Construction: Two separate platinum coils are embedded and sealed inside a high purity aluminum oxide ceramic body. Lead wires are shear force resistant and assure proper connection to extension leads and cables.

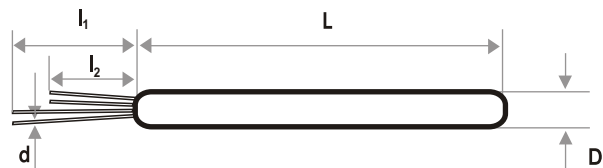

### Models

Description	Tolerance IEC 60751	Order No.	Dimensions mm					Self Heating $0^{\circ}\text{C (K/mW)}$	Response time			
			L	D	d	$l_1$	$l_2$		Water current $V=0.4\text{m/s}$		Air stream $V=3\text{m/s}$	
								$t_{0.5}$	$t_{0.9}$	$t_{0.5}$	$t_{0.9}$	
2Pt100 KN 3045	W0.3	32.206.630	$30_{-0}^{+3}$	4.5±0.15	0.27±0.01	11.0±0.5	10.0±0.5	0.01	0.4	1.4	26.8	83.7
	W0.15	32.206.651										
	W0.1	32.206.653										

### Technical Specification

<b>Nominal resistance:</b>	100 Ohm @ 0 °C	<b>Measuring current:</b>	1 mA
<b>Temperature range:</b>	W0.3 (Class B) = -196 to +660 °C W0.15 (Class A) = -196 to +600 °C (Heraeus exceeds IEC 60751: -100 to +450 °C) W0.1 (Class 1/3) = -100 to +350 °C	<b>Tolerance class:</b>	- According to IEC 60751:2008 - Other standards and narrower tolerances are available on request
<b>Temperature coefficient:</b>	$T_c = 3850 \text{ ppm/K}$	<b>Temperature stability:</b>	Excellent long-term stability
<b>Leads:</b>	Palladium-gold alloy	<b>Also available:</b>	- Platinum-gold alloy - Different temperature coefficients (3916 ppm/K - old JIS) - Extension leads
<b>Insulation resistance after assembly:</b>	> 100 MOhm @ 25 °C		

The measuring point is located at 8 mm from the end of the sensor body.

## Heraeus Sensor Technology USA

1901 Route 130  
North Brunswick, NJ 08902  
Phone 732-940-4400 Fax 732-940-4445  
Email info.hst-us@heraeus.com  
www.hst-us.com