

DIESEL GENERATOR SET

MTU 4R0113 DS40

40 kWe / 60 Hz / Standby
208 - 600V

Reference MTU 4R0113 DS40 (40 kWe) for Prime Rating Technical Data



SYSTEM RATINGS

Standby

| Voltage (L-L) | 240V** | 208V** | 240V** | 380V** | 480V** | 600V** |
|-----------------|-------------------------|--------------|---------------|--------------|--------------|--------------|
| Phase | 1 | 3 | 3 | 3 | 3 | 3 |
| PF | 1 | 0.8 | 0.8 | 0.8 | 0.8 | 0.8 |
| Hz | 60 | 60 | 60 | 60 | 60 | 60 |
| kW | 40 | 40 | 40 | 40 | 40 | 40 |
| kVA | 40 | 50 | 50 | 50 | 50 | 50 |
| Amps | 166 | 138 | 120 | 76 | 60 | 48 |
| skVA@30% | | | | | | |
| Voltage Dip | 63 | 129 | 129 | 112 | 172 | 92 |
| Generator Model | 361CSL1601 | 361CSL1601 | 361CSL1601 | 361CSL1601 | 361CSL1601 | 361PSL1632 |
| Temp Rise | 130 °C/40 °C | 130 °C/40 °C | 130 °C/40 °C | 130 °C/40 °C | 130 °C/40 °C | 130 °C/40 °C |
| Connection | 12 LEAD DOUBLE DELTA | 12 LEAD WYE | 12 LEAD DELTA | 12 LEAD WYE | 12 LEAD WYE | 4 LEAD WYE |

** UL 2200 Offered

CERTIFICATIONS AND STANDARDS

// **Emissions** – EPA Tier 3 Certified

// **Generator set is designed and manufactured in facilities certified to standards ISO 9001:2008 and ISO 14001:2004**

// **Seismic Certification – Optional**
– IBC Certification

// **UL 2200 / CSA – Optional**
– UL 2200 Listed
– CSA Certified

// **Performance Assurance Certification (PAC)**

- Generator Set Tested to ISO 8528-5 for Transient Response
- Verified product design, quality and performance integrity
- All engine systems are prototype and factory tested

// **Power Rating**

- Accepts Rated Load in One Step Per NFPA 110

STANDARD FEATURES*

- // MTU Onsite Energy is a single source supplier
- // Global Product Support
- // 2 Year Standard Warranty
- // 4045TF280 Diesel Engine
 - 4.5 Liter Displacement
 - Mechanical Injection Pump
 - 4-Cycle
- // Engine-generator resilient mounted
- // Complete Range of Accessories

- // Generator
 - Brushless, Rotating Field Generator
 - 2/3 Pitch Windings
 - 300% Short Circuit Capability with Optional Permanent Magnet Generator (PMG)
- // Digital Control Panel(s)
 - UL Recognized, CSA Certified, NFPA 110
 - Complete System Metering
 - LCD Display
- // Cooling System
 - Integral Set-Mounted
 - Engine-Driven Fan

STANDARD EQUIPMENT*

// Engine

Air Cleaner
 Oil Pump
 Oil Drain Extension and S/O Valve
 Full Flow Oil Filter
 Fuel Filter with Water Separator
 Jacket Water Pump
 Thermostat
 Blower Fan and Fan Drive
 Radiator - Unit Mounted
 Electric Starting Motor - 12V
 Governor - Mechanical Droop
 Base - Formed Steel
 SAE Flywheel and Bell Housing
 Charging Alternator - 12V
 Battery Box and Cables
 Flexible Fuel Connectors
 Flexible Exhaust Connection
 EPA Certified Engine

130 °C Max. Standby Temperature Rise
 1 Bearing, Sealed
 Flexible Coupling
 Full Amortisseur Windings
 125% Rotor Balancing
 3-Phase Voltage Sensing
 100% of Rated Load - One Step
 5% Max. Total Harmonic Distortion

// Digital Control Panel(s)

Digital Metering
 Engine Parameters
 Generator Protection Functions
 Engine Protection
 Windows®-Based Software
 Multilingual Capability
 Remote Communications to RDP-110 Remote Annunciator
 Programmable Input and Output Contacts
 UL Recognized, CSA Certified, CE Approved
 Event Recording
 IP 54 Front Panel Rating with Integrated Gasket
 NFPA110 Compatible

// Generator

NEMA MG1, IEEE and ANSI standards compliance for temperature rise and motor starting
 Self-Ventilated and Drip-Proof
 Superior Voltage Waveform
 Solid State, Volts-per-Hertz Regulator
 ±1% Voltage Regulation No Load to Full Load
 Brushless Alternator with Brushless Pilot Exciter
 4 Pole, Rotating Field

* Represents standard product only. Consult Factory/MTU Onsite Energy Distributor for additional configurations.

APPLICATION DATA

// Engine

| | |
|------------------------------------|------------------|
| Manufacturer | John Deere |
| Model | 4045TF280 |
| Type | 4-Cycle |
| Arrangement | 4-Inline |
| Displacement: L (in ³) | 4.5 (275) |
| Bore: cm (in) | 10.6 (4.19) |
| Stroke: cm (in) | 12.7 (5) |
| Compression Ratio | 19.0:1 |
| Rated RPM | 1,800 |
| Engine Governor | Mechanical Droop |
| Max. Power: kWm (bhp) | 63 (85) |
| Speed Regulation | ±0.5% |
| Air Cleaner | Dry |

// Liquid Capacity (Lubrication)

| | |
|---------------------------------------|-----------|
| Total Oil System: L (gal) | 13 (3.4) |
| Engine Jacket Water Capacity: L (gal) | 8.5 (2.3) |
| System Coolant Capacity: L (gal) | 18.9 (5) |

// Electrical

| | |
|--|-----|
| Electric Volts DC | 12 |
| Cold Cranking Amps Under -17.8 °C (0 °F) | 925 |

// Fuel System

| | |
|--------------------------------|-------------|
| Fuel Supply Connection Size | 3/8" NPT |
| Fuel Return Connection Size | 3/8" NPT |
| Max. Fuel Lift: m (ft) | 1.8 (6) |
| Recommended Fuel | Diesel #2 |
| Total Fuel Flow: L/hr (gal/hr) | 62.5 (16.5) |

// Fuel Consumption

| | |
|--|------------|
| At 100% of Power Rating: L/hr (gal/hr) | 17.4 (4.6) |
| At 75% of Power Rating: L/hr (gal/hr) | 13.6 (3.6) |
| At 50% of Power Rating: L/hr (gal/hr) | 9.5 (2.5) |

// Cooling - Radiator System

| | |
|--|------------|
| Ambient Capacity of Radiator: °C (°F) | 50 (122) |
| Max. Restriction of Cooling Air: Intake and Discharge Side of Rad.: kPa (in. H ₂ O) | 0.12 (0.5) |
| Water Pump Capacity: L/min (gpm) | 144 (38) |
| Heat Rejection to Coolant: kW (BTUM) | 36 (2,049) |
| Heat Radiated to Ambient: kW (BTUM) | 6.8 (384) |
| Fan Power: kW (hp) | 1.6 (2.2) |

// Air Requirements


| | |
|---|-------------|
| Aspirating: *m ³ /min (SCFM) | 5.3 (187) |
| Air Flow Required for Rad. | |
| Cooled Unit: *m ³ /min (SCFM) | 117 (4,088) |
| Remote Cooled Applications; Air Flow Required for Dissipation of Radiated Generator Set Heat for a Max. of 25 °F Rise: *m ³ /min (SCFM) | 25 (867) |

* Air density = 1.184 kg/m³ (0.0739 lbm/ft³)

// Exhaust System

| | |
|---|-------------|
| Gas Temp. (Stack): °C (°F) | 579 (1,074) |
| Gas Volume at Stack | |
| Temp: m ³ /min (CFM) | 19.2 (679) |
| Max. Allowable | |
| Back Pressure: kPa (in. H ₂ O) | 7.5 (30) |
| Min. Allowable | |
| Back Pressure: kPa (in. H ₂ O) | N/A |

WEIGHTS AND DIMENSIONS

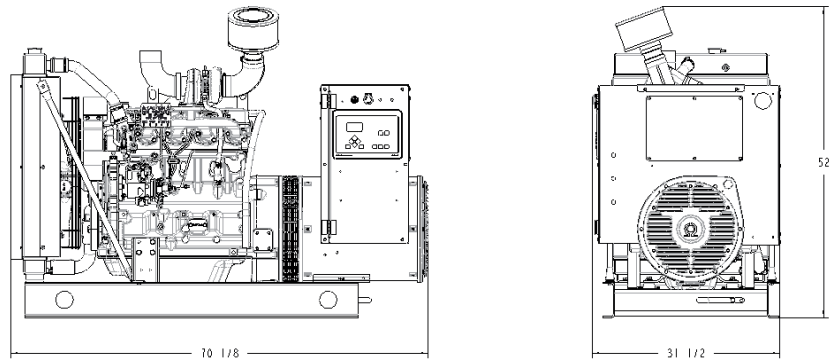

Drawing above for illustration purposes only, based on standard open power 480 volt generator set. Lengths may vary with other voltages. Do not use for installation design. See website for unit specific template drawings.

System

Open Power Unit (OPU)

Dimensions (L x W x H)

1,781 x 800 x 1,321 mm (70.13 x 31.5 x 52 in)

Weight (dry/less tank)

872 kg (1,920 lb)

Weights and dimensions are based on open power units and are estimates only. Consult the factory for accurate weights and dimensions for your specific generator set.

SOUND DATA

Unit Type

Level 0: Open Power Unit dB(A)

Standby Full Load

80.5

Sound data is provided at 7 m (23 ft). Generator set tested in accordance with ISO 8528-10 and with infinite exhaust.

EMISSIONS DATA

NO_x + NMHC

3.8

CO

0.69

PM

0.22

All units are in g/hp-hr and shown at 100% load (not comparable to EPA weighted cycle values).

Emission levels of the engine may vary with ambient temperature, barometric pressure, humidity, fuel type and quality, installation parameters, measuring instrumentation, etc. The data was obtained in compliance with US EPA regulations. The weighted cycle value (not shown) from each engine is guaranteed to be within the US EPA Standards. 5-mode emission data per 40 CFR 89 or 40 CFR 1039 (as applicable) is available upon request.

RATING DEFINITIONS AND CONDITIONS

// Standby ratings apply to installations served by a reliable utility source. The standby rating is applicable to varying loads for the duration of a power outage. No overload capability for this rating. Ratings are in accordance with ISO 3046-1, BS 5514, and AS 2789. Average load factor: ≤ 85%.

// Deration Factor:

Altitude: Consult your local MTU Onsite Energy Power Generation Distributor for altitude derations.

Temperature: Consult your local MTU Onsite Energy Power Generation Distributor for temperature derations.

C/F = Consult Factory/MTU Onsite Energy Distributor

N/A = Not Available

MTU Onsite Energy

A Rolls-Royce Power Systems Brand

www.mtuonsiteenergy.com