

PBDRN60 Series

60 WATTS - AC/DC DIN RAIL MOUNTABLE - INDUSTRIAL CONTROL

FEATURES

- AC/DC power module
- Universal input 85 - 264VAC
- DC input voltage 90-375Vdc
- Compact and robust design.
- Easy mounting on TS35 Din-Rail
- DC OK relay contact
- High efficiency up to 89%
- Short circuit protection
- Internal input filter
- Operational temperature between to -10 to +61°C
- Local and international Approvals; C-Tick, CE, UL, cUL, TUV



SPECIFICATIONS

INPUT	
Input voltage range	85-264VAC
Input current	Vi: 115 / 230VAC, 1060/590mA
Line frequency	Vi nom, Io nom 47-63Hz
Inrush current	Vi: 115/230VAC, I nom 20/40A
Power dissipation	Vi: 230VAC, Io nom 5V 12.5W, 12V 9.06W, 24V 8.8W and 48V 7.8W
Leakage current	Input-Output 0.25mA Input-FG 3.5mA
OUTPUT	
Voltage range	For 5V, up to 110% of Vi nom. Other units, up to 115% ov Vi nom
Hold-up time	Vi: 115/230VAC, 20/30ms
Ripple and noise	BW = 20MHz, 50 mV
Capacitor load	7000µf
ENVIRONMENTAL	
Storage temperature	Non operational -25 to +85°C
Relative humidity	20-95%
Isolation voltage	Input-Output at 3000 VAC Input-FG 1500VAC
Ambient temperature	-10 to +71°C
Derating	From +61°C to +71°C, 2.5% per °C
Temperature coefficient	±0.03%°C


Cooling	Free air convection
Dimensions	90 x 40.5 x 115 mm
GENERAL	
Efficiency	79% - 89% typical, model dependant
Switching frequency	55-90KHz
Weight	340g
STANDARDS	
Safety standards	UL508 Listed, UL60950-1, UL1310 Class 2 Power (5V, 12V models only) Recognised ISA 12.12.01 (Class 1, Division 2, Groups A,B,C and D)
C tick	AS/NZ CISPR11 Group 1, Class A
EMI standards	EN 61000-6-3 EN 55022 Class B EN 61000-3-2, EN 61000-3-3

SELECTION TABLE

MODEL NUMBER	OUTPUT	POWER
PBDRN60S05-A	+ 5 V	10000 mA
PBDRN60S12-A	+ 12V	5000 mA
PBDRN60S24-A	+ 24 V	2500 mA
PBDRN60S48-A	+ 48 V	1250 mA

MECHANICAL & PIN CONFIGURATION

mm [inch]

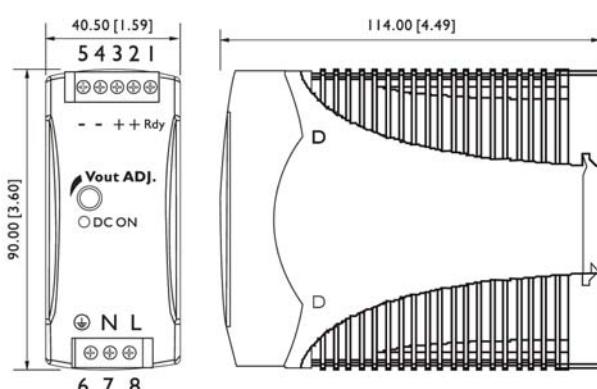

CONSTRUCTION

Easy snap-on mounting onto the DIN-Rail (TS35/7.5 or TS35/15), unit sits safely and firmly on the rail.

INSTALLATION

Ventilation / Cooling
Normal convection
All sides 25mm free space
For cooling recommended
Connector size range
Screw terminal:
AWG26-12 (0.2~2.5mm²) flexible / solid cable,
connector can withstand torque at maximum 5
pound-inches.
4~5 m/m stripping at cable end recommends
Use copper conductors only, 60 / 75°C

GENERAL TOLERANCE	
0.00[0.00] - 30.00[1.18]	±0.30[0.01]
30.00[1.18] - 120.00[4.72]	±0.50[0.02]