


FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
 - Metal silicon junction ,majority carrier conduction
 - Guard ring for overvoltage protection
 - Low power loss ,high efficiency
 - High current capability ,low forward voltage drop
 - High surge capability
 - Very low profile-typical height of 1.1mm
 - Ideal for automated placement
- High temperature soldering guaranteed:260°C/10 seconds at terminals
Component in accordance to RoHS 2011/65/EU



TO-277

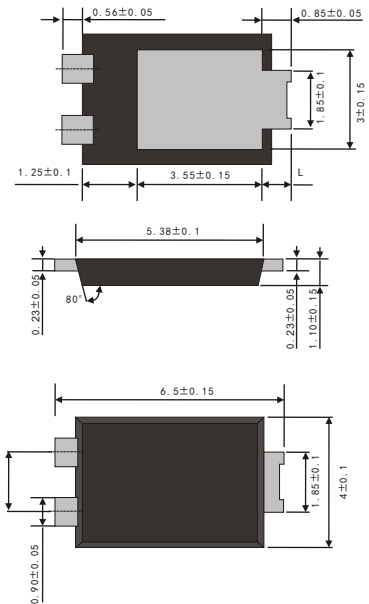


MECHANICAL DATA

- Case: TO-277 molded plastic body
- Terminals: Plated axial leads, solderable per MIL-STD-750,method 2026
- Mounting Position: Any
- Weight: 0.092 grams (approx)

TYPICAL APPLICATIONS

For use in low voltage ,high frequency inverters ,DC/DC converters, free wheeling ,and polarity protection applications



Dimensions in inches and (millimeters)

MAXIMUM RATINGS

(Ratings at 25°C ambient temperature unless otherwise specified)

Parameter	Symbol	SP10U45L-T	Unit
Minimum repetitive peak reverse voltage, $I_R=0.5mA$	V_{RRM}	48	V
Maximum average forward rectified current	$I_F(AV)$	10.0	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method at rated TL)	I_{FSM}	150	A
Operating junction temperature range	T_J	-55 to+150	°C
Storage temperature range	T_{stg}	-55 to+150	°C

RATINGS AND CHARACTERISTIC OF SP10U45L-T

ELECTRICAL CHARACTERISTICS (T_A=25°C Unless otherwise noted)

Parameter	Test Conditions		Symbol	TYP.	MAX.	Unit
Instaneous forward voltage	T _J =25°C	I _F =10A	V _F ¹⁾	0.43	0.45	V
		I _F =5A		0.38	—	
		I _F =2A		0.33	—	
	T _J =125°C	I _F =10A		0.35	0.40	
		I _F =5A		0.28	—	
		I _F =2A		0.22	—	
Reverse current	V _R =45V	T _A =25°C	I _R ²⁾	60	150	μA
		T _A =100°C		6	12	mA
		T _A =125°C		20	50	
Typical junction capacitance	4V, 1MHz		C _J	750		pF

Notes: 1.Pulse test: 300 μs pulse width,1% duty cycle
2.Pulse test: pulse width≤40ms

THERMAL CHARACTERISTICS (T_A=25°C Unless otherwise noted)

Parameter	Symbol	SP10U45L-T	Unit
Typical thermal resistance ³⁾	R _{θJA}	60.0	°C/W
	R _{θJL}	3.0	

3 Units mounted on recommended PCB 1 oz. Pad layout

AVAILABALE PACK INFORMATION

Product code	Pack	Box Size L*W*H(mm)	Quantity (pcs/box)	Carton SizeL*W*H(mm)	Quantity (box/carton)
SP10U45L-T-TO-277	T/B	340*340*50	10K	365*350*350	6

RATINGS AND CHARACTERISTIC OF SP10U45L-T

FIG.1-FORWARD CURRENT DERATING CURVE

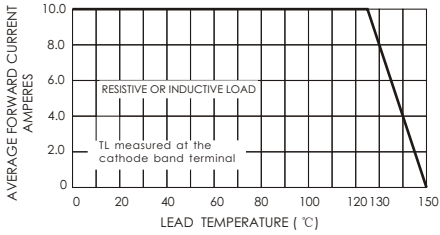


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

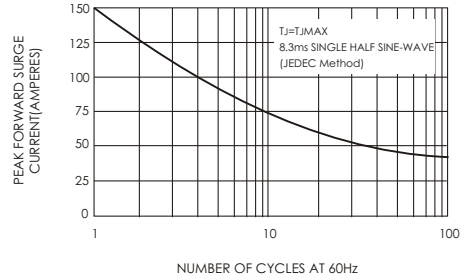


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

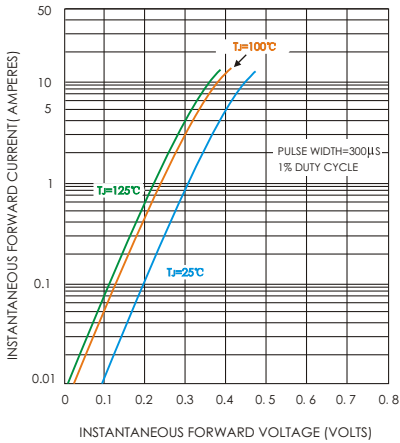


FIG.4-TYPICAL REVERSE CHARACTERISTICS

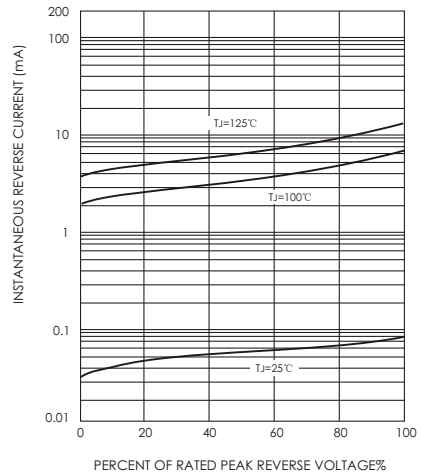


FIG.5-TYPICAL JUNCTION CAPACITANCE

