

Coaxial Bandpass Filter

ZFBP-13.5+

50Ω 12 to 15 MHz

The Big Deal

- High rejection, (50dB from 30-1000 MHz)
- Low frequency bandpass filter
- Connectorized package



CASE STYLE: H16

Product Overview

ZFBP-13.5+ is a bandpass filter built in rugged connectorized package, covering 12 to 15 MHz. These units offer good matching within the band pass and high rejection. This will find its application in semiconductor processing equipment. It has repeatable performance across production lots and consistent performance across temperature.

Key Features

Feature	Advantages
Good passband insertion loss and roll-off	Low insertion loss will be used in designs optimized for high performance applications. Good roll-off will attenuate frequencies closer to the passband with good rejection value of >20dB.
Good ultimate rejection	This enables the filters to attenuate spurious signals and reject harmonics for broad band frequency.
Connectorized package	The connectorized packages can easily interface with other devices and well suited for test set-ups.
Good VSWR, 1.3:1 typical in passband	This model has very good return loss for this bandwidth and provides good interface when used with other devices.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Coaxial Bandpass Filter

ZFBP-13.5+

50Ω 12 to 15 MHz



CASE STYLE: H16

Connectors SMA-Female
Model ZFBP-13.5-S+

Features

- High stopband Rejection
- Good VSWR, 1.3:1 typical in passband
- Connectorized package

Applications

- Harmonic Rejection
- Medical Instrumentation
- Industrial process equipments
- Lab use

Electrical Specifications at 25°C


Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Center Frequency	—	—	13.5	—	MHz
	Insertion Loss	F1-F2	12 -15	1.5	3.0	dB
	VSWR	F1-F2	12 -15	1.3	1.7	:1
Stop Band, Lower	Insertion Loss	DC-F3	DC - 8	20	31	dB
	VSWR	DC-F3	DC - 8	—	46	:1
Stop Band, Upper	Insertion Loss	F4-F5	22 -1600	20	33	dB
	VSWR	F4-F5	22 -1600	—	12	:1

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W max.

Permanent damage may occur if any of these limits are exceeded.


Functional Schematic

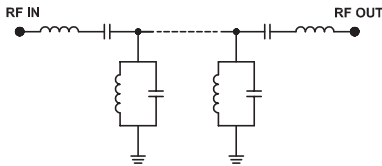

Typical Performance Data at 25°C





Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nsec)
0.5	102.04	1737.18	12.0	175.55
5.0	63.88	289.53	12.2	166.33
7.0	42.69	91.43	12.4	162.19
8.0	30.99	48.26	12.6	157.87
8.8	20.32	24.14	12.8	154.19
9.2	14.38	14.03	13.0	150.90
9.6	8.31	6.32	13.2	148.00
10.4	1.96	1.16	13.4	146.25
12.0	1.29	1.18	13.5	145.64
13.5	1.31	1.22	13.6	144.92
15.0	1.46	1.20	13.8	143.96
17.0	3.32	2.27	14.0	142.77
17.6	6.10	4.27	14.1	142.59
18.6	13.17	10.50	14.2	141.92
20.0	22.92	20.22	14.3	141.95
22.0	34.52	32.79	14.4	142.26
50.0	61.41	217.15	14.5	141.98
500.0	86.71	347.44	14.6	141.92
1000.0	80.29	78.97	14.8	142.58
1600.0	55.07	69.49	15.0	145.14

Typical Frequency Response



+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

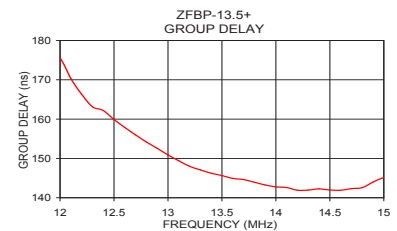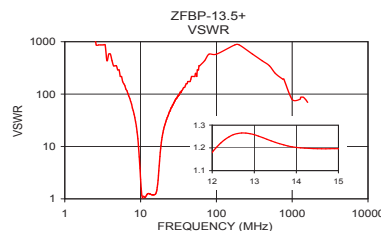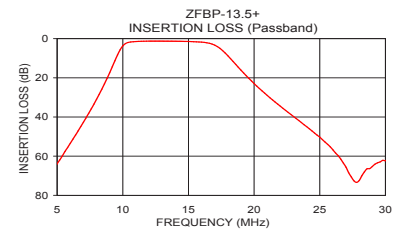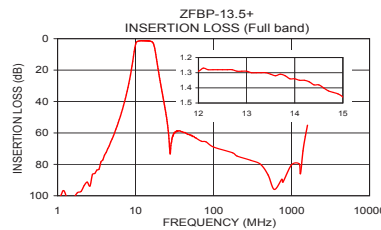

Notes


- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Coaxial Connections

INPUT	SMA Female
OUTPUT	SMA Female

Outline Drawing

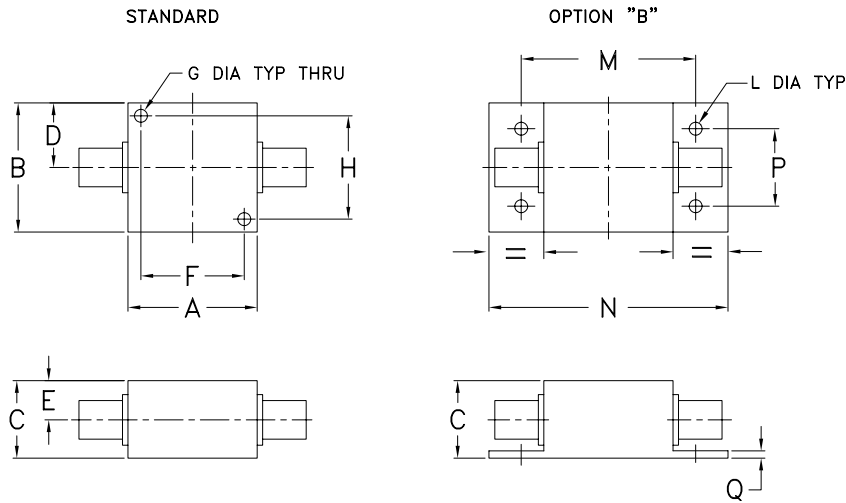

Outline Dimensions ($\frac{\text{inch}}$ / mm)

A	B	C	D	E	F	G	H
1.25	1.25	.75	.63	.38	1.000	.125	1.000
31.75	31.75	19.05	16.00	9.65	25.40	3.18	25.40
J	K	L	M	N	P	Q	wt
--	--	.125	1.688	2.18	.750	.06	grams
--	--	3.18	42.88	55.37	19.05	1.52	70.0

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

